

OFFICE OF STATEWIDE HEALTH PLANNING AND DEVELOPMENT FACILITIES DEVELOPMENT DIVISION

OFFICE USE ONLY APPLICATION FOR OSHPD PREAPPROVAL OF MANUFACTURER'S CERTIFICATION (OPM) **APPLICATION #:** OPM-0247-13 OSHPD Preapproval of Manufacturer's Certification (OPM) New Renewal Update to Pre-CBC 2013 OPA Number: Type: **Manufacturer Information** Manufacturer: Pentair Equipment Protection Manufacturer's Technical Representative: Nate Westby Mailing Address: 2100 Hoffman Way, Anoka, MN. 55303 Telephone: (763) 422-2660 Email: Nate.westby@pentair.com **Product Information** Free-Standing Enclosures - Single and Dual Access Product Name: Product Type: Communication Equipment Product Model Number: Single Access: A602418FS, A722418FS, A723018FS, A723618FS, A902420FS, A903620FS, A603624FS, A722424FS, A723024FS, A723624FS, A903624FS, A723630FS, A723636FS, A903636FS NOTE: Applies to all Single Access Enclosures (no suffix - mild steel; 'G' suffix - mild steel painted; 'N4' suffix - stainless steel) **Dual Access** A722424FSDA, A723024FSDA, A723624FSDA, A903624FSDA, A722430FSDA, A722436FSDA, A723636FSDA, A903636FSDA NOTE: Applies to all Dual Access Enclosures (no suffix - mild steel; 'G' suffix - mild steel painted; 'N4' suffix - stainless steel) Type 12 and Type 4X enclosures designed to hold electronic equipment in communication data General Description: centers and telecommunication rooms. **Applicant Information** Applicant Company Name: EASE Co. Contact Person: Jonathan Roberson, S.E. 5877 Pine Ave. Suite 210, Chino Hills, CA. 91709 Mailing Address: Telephone: (909) 606-7622 Email: J.Roberson@EASECo.com I hereby agree to reimburse the Office of Statewide Health Planning and Development review fees in accordance with the California Administrative Code, 2013. Signature of Applicant: Date: 7/9/15 Company Name: Title: Principal Engineer EASE Co.

"Access to Safe, Quality Healthcare Environments that Meet California's Diverse and Dynamic Needs'

os Dpd

STATE OF CALIFORNIA – HEALTH AND HUMAN SERVICES AGENCY OSH-FD-700 (REV 1/24/13)

Page 1 of 2

10/14/2015

OPM-0247-13: Reviewed for Code Compliance by William Staehlin

Page 1 of 20





OFFICE OF STATEWIDE HEALTH PLANNING AND DEVELOPMENT FACILITIES DEVELOPMENT DIVISION

Registered Design Professional Preparing Engineering Recommendations
Company Name: EASE Co.
Name: Jonathan Roberson, S.E. California License Number: S4197
Mailing Address: 5877 Pine Ave. Suite 210, Chino Hills, CA. 91709
Telephone: 909-606-7667 Email: J.Roberson@EASECo.com
OSHPD Special Seismic Certification Preapproval (OSP)
 □ Special Seismic Certification is preapproved under OSP- (Separate application for OSP is required) □ Special Seismic Certification is not preapproved
Certification Method(s)
☐ Testing in accordance with: ☐ ICC-ES AC156 ☐ FM 1950-10 ☐ Other* (Please Specify): ☐ OS
*Use of test criteria other than those adopted by the California Building Standards Code, 2013 (CBSC 2013) for component supports and attachments are not permitted. For distribution system, interior partition wall, and suspended ceiling seismic bracings, test criteria other than those adopted in the CBSC 2013 may be used when approved by OSHPD prior to testing. BY: William Staehlin Analysis DATE: 10/14/2015 Combination of Testing, Analysis, and/or Experience Data (Please Specify):
List of Attachments Supporting the Manufacturer's Certification
 ☐ Test Report ☐ Drawings ☐ Calculations ☐ Manufacturer's Catalog ☐ Other(s) (Please Specify):
OFFICE USE ONLY – OSHPD APPROVAL VALID FOR CBC 2013 ONLY
Signature: Date: 10-14-2015 Print Name: William Staehlin Title: SSE Condition of Approval (if applicable):
"Access to Safe, Quality Healthcare Environments that Meet California's Diverse and Dynamic Needs"

STATE OF CALIFORNIA – HEALTH AND HUMAN SERVICES AGENCY OSH-FD-700 (REV 1/24/13)



Page 2 of 2

10/14/2015

OPM-0247-13: Reviewed for Code Compliance by William Staehlin

Page 2 of 20





EQUIPMENT ANCHORAGE & SEISMIC ENGINEERING

5877 Pine Ave, Ste. 210 Chino Hills, CA. 91709 Phn: (909) 606-7622

Office of Statewide Health Planning and Development
PREAPPROVAL OF MANUFACTURER'S CERTIFICATION
OPM-0247-13

THIS PREAPPROVAL CONFORMS TO THE 2013 CALIFORNIA BUILDING CODE

MANUFACTURER: PE

PENTAIR

Sheet: 1 of 18


EQUIPMENT NAME:

FREE-STANDING ENCLOSURE-SINGLE & DUAL ACCESS

Date: 10/6/15

GENERAL NOTES

- 1. THIS OSHPD PREAPPROVAL OF MANUFACTURER'S CERTIFICATION (OPM) IS BASED ON THE 2013 CBC. THE DEMANDS (DESIGN FORCES) FOR USE WITH THIS OPM SHALL BE BASED ON THE 2013 CBC
- 2. THIS DOCUMENT MAY ONLY BE USED WITH THE EXPRESS WRITTEN CONSENT OF THE MANUFACTURER LISTED ABOVE FOR THE SPECIFIC PROJECT SITE AND INSTALLATION LOCATION. THIS DOCUMENT IS INVALID WITHOUT SUCH CONSENT.
- 3. THIS PREAPPROVAL CONFORMS TO THE 2013 CALIFORNIA BUILDING CODE WHERE SDS IS NOT GREATER THAN 1.00, 1.15, 1.40, 1.50 & 2.20: SEE DETAILS FOR APPLICABILITY.
- FORCES PER ASCE 7-10 SECTION 13.3.1, EQUATIONS 13.3-1, 13.3-2 & 13.3-3,
 - WHERE SDS = 1.00, ap = 2.5, lp = 1.5, Rp = 6.0, z/h = 0 AT CONCRETE SLAB. SEE FOLLOWING SHEETS FOR Ω_0
 - WHERE SDS = 1.15, ap = 2.5, lp = 1.5, Rp = 6.0, z/h = 0 AT CONCRETE SLAB. SEE FOLLOWING SHEETS FOR Ω₀
 - WHERE SDS = 1.40, ap = 2.5, lp = 1.5, Rp = 6.0, z/h = 0 AT CONCRETE SLAB. SEE FOLLOWING SHEETS FOR Ω_0
 - WHERE SDS = 1.50, ap = 2.5, lp = 1.5, Rp = 6.0, z/h = 0 AT CONCRETE SLAB. SEE FOLLOWING SHEETS FOR Ω_0
 - WHERE SDS = 2.20, ap = 2.5, Ip = 1.5, Rp = 6.0, $z/h \le 1$ AT CONCRETE SLAB ON METAL DECK. SEE FOLLOWING SHEETS FOR Ω_0
- 5. THIS PREAPPROVAL COVERS ONLY THE SUPPORTS AND ATTACHMENTS OF THE EQUIPMENT TO THE STRUCTURE.
- 6. ALL DESIGN FORCES SHOWN ON THE DRAWINGS ARE FACTORED LOADS THAT SHALL BE USED FOR STRENGTH DESIGN.
- 7. CONCRETE SLAB ON METAL DECK DETAIL VALID FOR DEMANDS SHOWN AT ANY ELEVATION IN THE BUILDING. (i.e. z/h < 1)
- 8. CONCRETE SLAB ON GRADE DETAIL VALID FOR DEMANDS SHOWN AT ANY ELEVATION BELOW GRADE. (i.e. z/h = 0)
- 9. RESPONSIBILITIES OF THE STRUCTURAL ENGINEER OF RECORD OF THE BUILDING
 - A. PROVIDE SUPPORTING STRUCTURE TO SUPPORT WEIGHTS AND FORCES SHOWN IN ADDITION TO ALL OTHER LOADS.
 - B. VERIFY THAT THE INSTALLATION IS IN CONFORMANCE WITH THE 2013 CBC AND WITH THE DETAILS, MATERIAL AND GAGE OF THE UNIT WHERE ATTACHMENTS ARE MADE AGREE WITH THE INFORMATION SHOWN ON THE PREAPPROVAL DOCUMENTS.
 - C. VERIFY THAT PROJECT SPECIFIC VALUES OF SDS & z/h RESULT IN SEISMIC FORCES (Eh, Ev) THAT DO NOT EXCEED THE VALUES ON THE DETAILS.
 - D. VERIFY THAT THE CONCRETE SLAB TO WHICH THE EQUIPMENT IS ANCHORED MEETS THE REQUIREMENTS OF THE APPLICABLE ICC ESR.
 - E. VERIFY THAT THE ANCHORS ARE AN ADEQUATE DISTANCE FROM ANY SLAB EDGES OR OPENINGS (SEE TYPICAL DETAIL ON SHEET 2).
 - F. VERIFY THAT ALL NEW OR EXISTING ANCHORS ARE AN ADEQUATE DISTANCE FROM THE UNIT ATTACHMENTS AND CHECK FOR INTERACTION WHERE OTHER ANCHORS ARE WITHIN 18" OR 6hef FROM THIS UNIT'S ANCHORS.
 - G. EQUIPMENT MANUFACTURER MUST DESIGN UNIT TO MAKE C.G. <= THAN THE C.G. HEIGHT DIMENSION SHOWN ON DRAWINGS.
 - H. ALL HOLES THRU STEEL FOR BOLTS SHALL BE STANDARD HOLE SIZE PER ANSI/AISC 360-10 TABLE J3.3.



10/14/2015

OPM-0247-13: Reviewed for Code Compliance by William Staehlin

Page 3 of 20



11-1461

10/6/15

DES. J. ROBERSON

JOB NO.

DATE

www.EquipmentAnchorage.com

SHEET

SHEETS

PENTAIR


FREE-STANDING ENCLOSURE SINGLE & DUAL ACCESS

10. EXPANSION ANCHORS:

A. ATTACHMENT IS TO BE MADE WITH THE ANCHORS LISTED BELOW AND INSTALLED AS DESCRIBED IN THE CORRESPONDING ICC REPORT.

Anchor Diameter	Concrete Type	Min. f'c (psi)	Anchor Type	ICC Report No.	Min. Embed.	Min. Spacing	Min. Edge Dist.	Min. Conc. Thickness	Torque Test	Direct Tension Test
3/8"	Sand Light Weight	3000	Hilti Kwik Bolt TZ	ESR-1917	2"	N/A	N/A	See Sheet 16 of 18	25 FT-LB	1186 lb
5/8"	Normal Weight	3000	Hilti Kwik Bolt TZ	ESR-1917	3-1/8"	12"	24"	5"	60 FT-LB	3135 lb
5/8"	Normal Weight	3000	Hilti Kwik Bolt TZ	ESR-1917	4"	12"	24"	6"	60 FT-LB	4540 lb

- B. THIS PREAPPROVAL ALLOWS FOR UP TO A MAXIMUM OF 2 ADJACENT CONCRETE SLAB EDGES, 24" AWAY MINIMUM (i.e. - CORNER). SEE ADJACENT DETAIL FOR ADDITIONAL MINIMUM ALLOWABLE CONCRETE EDGE DISTANCES.
- C. TESTING OF EXPANSION ANCHORS PER 2013 CBC, 1913A.7: TESTING SHALL BE DONE IN THE PRESENCE OF THE SPECIAL INSPECTOR AND A REPORT OF THE TEST RESULTS SHALL BE 13 SUBMITTED TO OSHPD
 - (i) AFTER AT LEAST 24 HOURS HAVE ELAPSED SINCE INSTALLATION, DIRECT PULL TENSION TEST OR TORQUE TEST AT LEAST 50% OF THE ANCHORS.
 - (ii) ACCEPTANCE CRITERIA:
 - DIRECT TENSION TEST: THE ANCHOR SHOULD HAVE NO OBSERVABLE MOVEMENT AT THE TEST LOAD, A PRACTICAL WAY TO DETERMINE OBSERVABLE MOVEMENT IS THAT THE WASHER BECOMES LOOSE.
 - TORQUE TEST: THE APPLICABLE TORQUE MUST BE ACHIEVED WITHIN THE FOLLOWING LIMITS: WEDGE TYPE: 1/2 TURN OF THE NUT
 - (iii) IF ANY ANCHOR FAILS, TEST ALL ANCHORS.
- D. AVOID DAMAGING EXISTING STEEL REINFORCING IN CONCRETE SLAB WHEN INSTALLING CONCRETE EXPANSION ANCHORS.
- E. PROVIDE FOR FULL THREAD ENGAGEMENT OF NUT & WASHER.
- 11. BOLTS THROUGH CONCRETE ON METAL DECK
 - A. BOLTS SHALL BE TORQUED BY 3/4 TURN OF THE NUTS AFTER THE SNUG TIGHT (THE SNUG-TIGHT CONDITION IS DEFINED AS THE TIGHTNESS REQUIRED TO BRING THE CONNECTED PLIES INTO FIRM CONTACT) CONDITION IS ACHIEVED, UNLESS OTHERWISE NOTED.
 - B. THROUGH BOLT HOLES SHALL BE 1/16" LARGER THAN BOLT SIZE (HOLE SIZE = BOLT SIZE + 1/16) FOR CONCRETE.
 - C. THROUGH-BOLTS IN CONCRETE SHALL RECEIVE SPECIAL INSPECTION AND TESTING (THROUGH BOLTS WITH STEEL TO STEEL CONNECTION IN TENSION DO NOT REQUIRE TENSION TESTING) IN ACCORDANCE WITH REQUIREMENTS FOR POST-INSTALLED ANCHORS.






10/14/2015

OPM-0247-13: Reviewed for Code Compliance by William Staehlin

Page 4 of 20



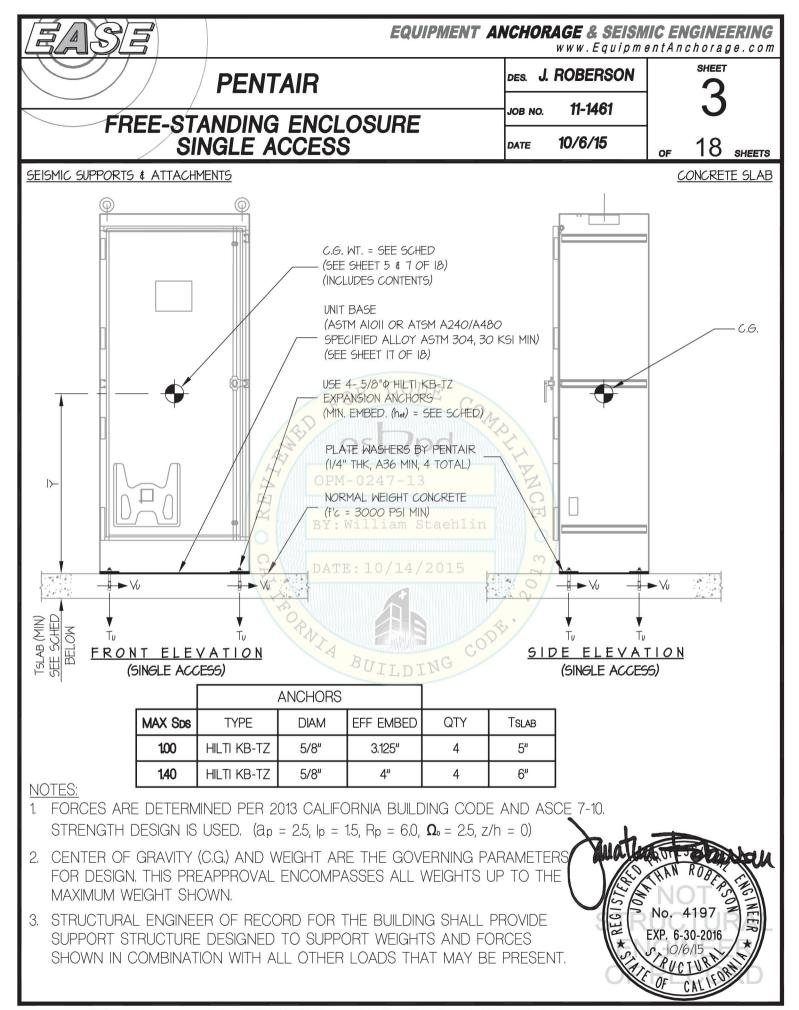


10/14/2015

OPM-0247-13: Reviewed for Code Compliance by William Staehlin

Page 5 of 20



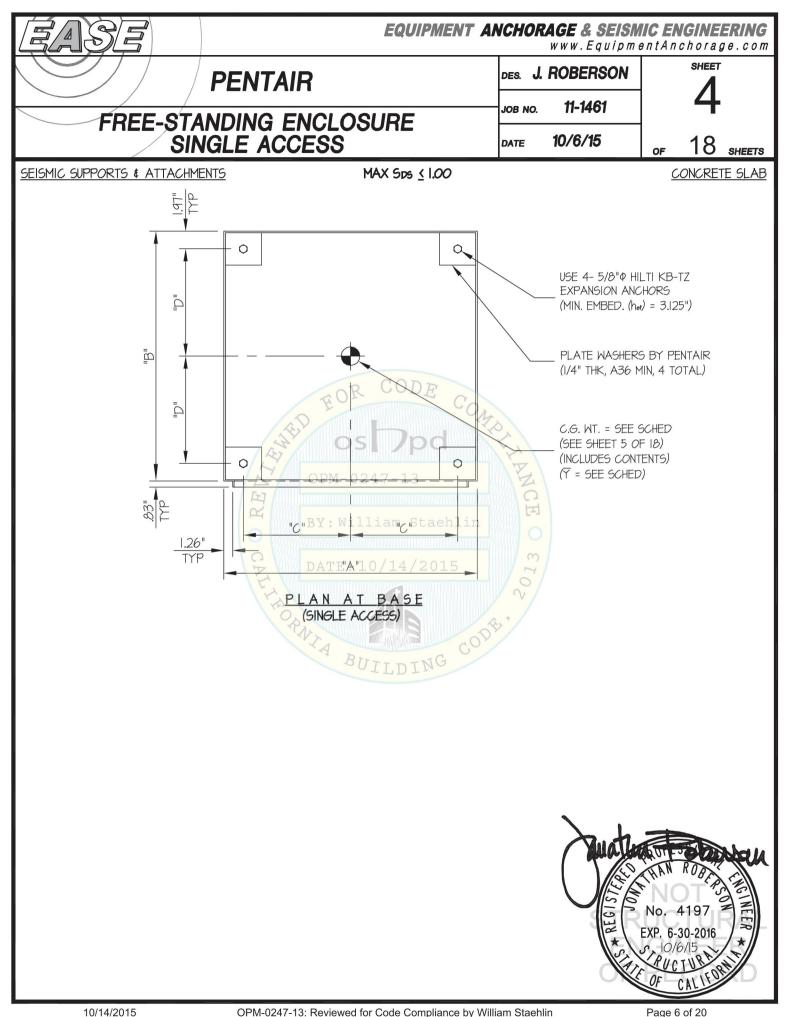





www.EquipmentAnchorage.com

DES. J. ROBERSON

11-1461

SHEET

10/6/15 DATE

JOB NO.

SHEETS

FREE-STANDING ENCLOSURE SINGLE ACCESS

PENTAIR


SEISMIC SUPPORTS & ATTACHMENTS

MAX Sps ≤ 1.00

CONCRETE SLAB

	FREE-STANDING SINGLE ACCESS											
MODEL	EMPTY CAB WEIGHT (lb.)	WEIGHT (lb.) INCLUDES CONTENTS	₹ (in.)	"A" (in.)	"B" (in.)	"C" (in.)	"D" (in.)	** Tu (lb.)	** Vu (lb.)			
A602418FS	234	1234	30.03	24.06	18.06	10.06	7.06	1579	349			
A722418FS	262	1262	36.03	24.06	18.06	10.06	7.06	1982	357			
A723018FS	298	1298	36.03	30.06	18.06	13.06	7.06	1948	367			
A723618FS	335	1335	36.03	36.06	18.06	16.06	7.06	1945	377			
A902420FS	-328	OPM <mark>328</mark> 247	45.03	24.06	20.06	210,06	8.06	2367	375			
A903620FS	409	1409	45.03	36.06	20.06	16.06	8.06	2312	398			
A603624FS	336	1336	30.03	36.06	24.06	16.06	10.06	1105	377			
A722424FS	306	1306 ₁₀	36.03	24.06	24.06	70.06	10.06	1489	369			
A723024FS	343	1343	36.03	30.06	24.06	13.06	10.06	1438	379			
A723624FS	376	1376	36.03	36.06	24.06	16.06	10.06	1413	389			
A903624FS	446	1446	45.03	36.06	24,06	16.06	10.06	1919	408			
A723630FS	424	1424U I	36.03	36.06	30.06	16.06	13.06	1131	402			
A723636FS	469	1469	36.03	36.06	36.06	16.06	16.06	953	415			
A903636FS	550	1550	45.03	36.06	36.06	16.06	16.06	1325	438			

^{**} VALUES INCLUDE $\Omega_{\!\scriptscriptstyle 0}$





EQUIPMENT ANCHORAGE & SEISMIC ENGINEERING www.EquipmentAnchorage.com SHEET DES. J. ROBERSON **PENTAIR** 11-1461 JOB NO. FREE-STANDING ENCLOSURE 10/6/15 SINGLE ACCESS DATE SHEETS SEISMIC SUPPORTS & ATTACHMENTS 1.00 < MAX S DS < 1.40 CONCRETE SLAB ON METAL DECK 0 USE 4- 5/8"Φ HILTI KB-TZ EXPANSION ANCHORS __ (MIN. EMBED. (het) = 4") <u>m</u> PLATE WASHERS BY PENTAIR (1/4" THK, A36 MIN, 4 TOTAL) __ C.G. WT. = SEE SCHED (SEE SHEET 7 OF 18) (INCLUDES CONTENTS) (Y = SEE SCHED) BY: William Staeh 1.26" TYP DATE A 10/14/2015 PLAN AT BASE (SINGLE ACCESS) BUILDING No. 4197 EXP. 6-30-2016

10/14/2015



www.EquipmentAnchorage.com

SHEET

DES. J. ROBERSON **PENTAIR**

11-1461 JOB NO.

DATE

10/6/15 8 SHEETS

FREE-STANDING ENCLOSURE SINGLE ACCESS

SEISMIC SUPPORTS & ATTACHMENTS

1.00 < MAX 5 ps < 1.40

CONCRETE SLAB ON METAL DECK

	FREE-STANDING SINGLE ACCESS											
MODEL	EMPTY CAB WEIGHT (lb.)	WEIGHT (lb.) INCLUDES CONTENTS	₹ (in.)	"A" (in.)	"B" (in.)	"C" (in.)	"D" (in.)	** Tu (lb.)	** Vu (lb.)			
A602418FS	234	1234	30.03	24.06	18.06	10.06	7.06	2319	487			
A722418FS	262	1262	36.03	24,06	18.06	10.06	7.06	2884	498			
A723018FS	298	1298	36.03	30.06	18,06	13.06	7.06	2840	513			
A723618FS	335	1335	36.03	36.06	18.06	16.06	7.06	2839	527			
A902420FS	328	PM-132847-	45.03	24.06	20.06	10.06	8.06	3429	525			
A903620FS	409	1409	45.03	36.06	20.06	16.06	8.06	3359	557			
A603624FS	336	1336	30.03	36.06	24.06	1 6.06	10.06	1664	528			
A722424FS	2 306 D	ATE 1306 _{0 / 1}	436.03	24.06	24.06	10.06	10.06	2199	516			
A723024FS	343	1343	36.03	30.06	24.06	13.06	10,06	2131	530			
A723624FS	376	1376	36.03	36.06	24.06	16.06	10.06	2099	544			
A903624FS	446	1446	45.03	36.06	24.06	16.06	10.06	2813	571			
A723630FS	424	1424 II	36.03	36.06	30.06	16.06	13.06	1710	562			
A723636FS	469	1469	36.03	36.06	36.06	16.06	16.06	1465	580			
A903636FS	550	1550	45.03	36.06	36.06	16.06	16.06	1991	612			


^{**} VALUES INCLUDE $\Omega_{\!\scriptscriptstyle 0}$





10/14/2015

PENTAIR PENTAIR DES. J. ROBERSON JOB NO. 11-1461 DATE 10/6/15 OF 18 SHEETS CONCRETE DETAILS

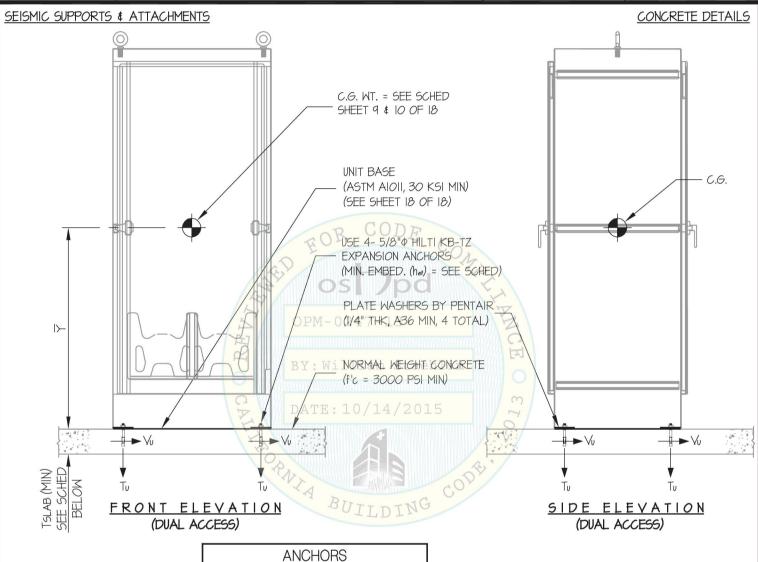

		ANCHORS			
MAX SDS	TYPE	DIAM	EFF EMBED	QTY	TSLAB
1.15	HILTI KB-TZ	5/8"	3.125"	4	5"
150	HILTI KB-TZ	5/8"	4"	4	6"

NOTES:

- 1. FORCES ARE DETERMINED PER 2013 CALIFORNIA BUILDING CODE AND ASSESTRENGTH DESIGN IS USED. ($\alpha_p=2.5$, p=1.5, p=6.0, $\Omega_0=2.5$, z/h=0)
- 2. CENTER OF GRAVITY (C.G.) AND WEIGHT ARE THE GOVERNING PARAMETERS FOR DESIGN, THIS PREAPPROVAL ENCOMPASSES ALL WEIGHTS UP TO THE MAXIMUM WEIGHT SHOWN.
- 3. STRUCTURAL ENGINEER OF RECORD FOR THE BUILDING SHALL PROVIDE SUPPORT STRUCTURE DESIGNED TO SUPPORT WEIGHTS AND FORCES SHOWN IN COMBINATION WITH ALL OTHER LOADS THAT MAY BE PRESENT.



10/14/2015

OPM-0247-13: Reviewed for Code Compliance by William Staehlin

EQUIPMENT ANCHORAGE & SEISMIC ENGINEERING

www.EquipmentAnchorage.com

DES. J. ROBERSON

11-1461 JOB NO.

10/6/15 DATE

SHEET

18 _{sheets}

SEISMIC SUPPORTS & ATTACHMENTS


PENTAIR

FREE-STANDING ENCLOSURE

DUAL ACCESS

MAX Sps ≤ 1.15

BRACKET DETAILS



USE 4- 5/8"Φ HILTI KB-TZ EXPANSION ANCHORS (MIN. EMBED. (hef) = 3.125")

PLATE WASHERS BY PENTAIR (I/4" THK, A36 MIN, 4 TOTAL)

C.G. WT. = SEE SCHED (Y = SEE SCHED)

(DUAL ACCESS)

	F.	· ////////////////////////////////////							
UNIT NUMBER	EMPTY CAB WEIGHT (lb.)	WEIGHT (lb.) INCLUDES CONTENTS	√	"A" (in.)	a"B" (in.)	,"C" (in.)	"D" (in.)	* Tu (lb.)	* Vu (lb.)
A722424FSDA	324	1324	36.03	24.06	24.06	10.06	10.06	1766	427
A723024FSDA	361	1361 ATE	36.03	30.06	24.06	13.06	10.06	1707	439
A723624FSDA	396	1396	36.03	36.06	24.06	16.06	10.06	1682	450
A903624FSDA	472	1472	45.03	36.06	24.06	16.06	10.06	2278	475
A722430FSDA	366	1366	36.03	24.06	30.06	10.06	13.06	1714	441
A722436FSDA	409	1409	36.03	24.06	36.06	10.06	16.06	1697	454
A723636FSDA	488	1488	36.03	36.06	36.06	16.06	16.06	1150	480
A903636FSDA	568	1568	45.03	36.06	36.06	16.06	16.06	1581	506

^{*} VALUES INCLUDE Ω₀





EQUIPMENT ANCHORAGE & SEISMIC ENGINEERING

www.EquipmentAnchorage.com

PENTAIR

DES. J. ROBERSON

11-1461

SHEET

FREE-STANDING ENCLOSURE **DUAL ACCESS**

10/6/15 DATE

JOB NO.

8 SHEETS

SEISMIC SUPPORTS & ATTACHMENTS

1.15 < MAX Sps < 1.50

CONCRETE SLAB

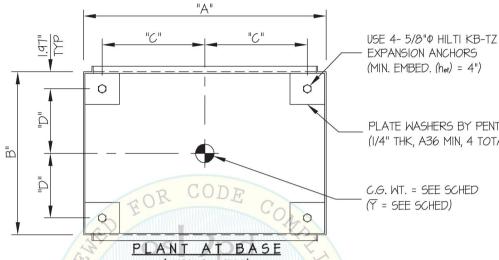


PLATE WASHERS BY PENTAIR

(I/4" THK, A36 MIN, 4 TOTAL)

C.G. WT. = SEE SCHED (Y = SEE SCHED)

(DUAL ACCESS)

UNIT NUMBER	EMPTY CAB WEIGHT (lb.)	WEIGHT (lb.) INCLUDES	⊥ ₹a(in.)	s"A"a(in)	1"B" (in.)	"C" (in.)	"D" (in.)	* Tu (lb.)	* Vu (lb.)
	TTEICHTT (IOV	CONTENTS							
A722424FSDA	324	1324	36.03	24.06	24.06	10.06	10.06	2406	559
A723024FSDA	361	1361	36.03	30.06	24.06	13,06	10.06	2331	575
A723624FSDA	396	1396	36.03	36.06	24.06	16.06	10.06	2300	590
A903624FSDA	472	1472	45.03	36.06	24.06	16.06	10.06	3086	622
A722430FSDA	366	1366	36.03	24.06	30.06	10.06	13.06	2340	577
A722436FSDA	409	1409 BU	36.03	24.06	36.06	10.06	16.06	2321	595
A723636FSDA	488	1488	36.03	36.06	36.06	16.06	16.06	1610	629
A903636FSDA	568	1568	45.03	36.06	36.06	16.06	16.06	2180	662

^{*} VALUES INCLUDE Ω.





EQUIPMENT ANCHORAGE & SEISMIC ENGINEERING www.EquipmentAnchorage.com SHEET DES. J. ROBERSON **PENTAIR** 11-1461 JOB NO. FREE-STANDING ENCLOSURE 10/6/15 SINGLE ACCESS DATE SHEETS CONCRETE SLAB ON METAL DECK SEISMIC SUPPORTS & ATTACHMENTS C.G. WT. = SEE SCHED (SEE SHEET 13 OF 18) (INCLUDES CONTENTS) UNIT BASE (ASTM AIOII OR ATSM A240/A480 SPECIFIED ALLOY ASTM 304, 30 KSI MIN) C.G. (SEE SHEET 17 OF 18) USE 4-5/8" (A36) THREADED RODS THRU FLOOR OSI PLATE WASHERS BY PENTAIR OPM(1/4)" THK, A36 MIN, 4 TOTAL) N.W. OR SAND L.W. CONC. (3000 PSI MIN.) REFER TO SHEET 16 OF 18 FOR ADDITIONAL DETAILS BUILDING SIDE ELEVATION FRONT ELEVATION (SINGLE ACCESS) (SINGLE ACCESS) NOTES: FORCES ARE DETERMINED PER 2013 CALIFORNIA BUILDING CODE AND ASCE 7-10. STRENGTH DESIGN IS USED. (SDS = 2.20, Δp = 2.5, |p| = 1.5, Rp = 6.0, Ω_0 = 2.5, z/h < 1) HORIZONTAL FORCE (En) = 1.65 Wp HORIZONTAL FORCE (Emh) = 4.13 Wp (FOR CONCRETE ANCHORAGE) VERTICAL FORCE (Ev) = 0.44 Wp 2. CENTER OF GRAVITY (C.G.) AND WEIGHT ARE THE GOVERNING PARAMETERS FOR DESIGN, THIS PREAPPROVAL ENCOMPASSES ALL WEIGHTS UP TO THE

10/14/2015

MAXIMUM WEIGHT SHOWN.

OPM-0247-13: Reviewed for Code Compliance by William Staehlin

Page 13 of 20

No. 4197

EXP. 6-30-2016



3. STRUCTURAL ENGINEER OF RECORD FOR THE BUILDING SHALL PROVIDE

IN COMBINATION WITH ALL OTHER LOADS THAT MAY BE PRESENT.

SUPPORT STRUCTURE DESIGNED TO SUPPORT WEIGHTS AND FORCES SHOWN

EQUIPMENT ANCHORAGE & SEISMIC ENGINEERING www.EquipmentAnchorage.com SHEET

PENTAIR

DES. J. ROBERSON 11-1461 JOB NO.

FREE-STANDING ENCLOSURE SINGLE ACCESS

10/6/15 DATE

SHEETS SEISMIC SUPPORTS & ATTACHMENTS CONCRETE SLAB ON METAL DECK 0 0, USE 4-5/8" (A36) THREADED RODS $\bar{\underline{\Box}}$ THRU FLOOR PLATE WASHERS BY PENTAIR <u>m</u> (1/4" THK, A36 MIN, 4 TOTAL) <u>_</u> C.G. WT. = SEE SCHED (SEE SHEET 13 OF 18) (INCLUDES CONTENTS) (Y = SEE SCHED) BY: William Staehli 1.26" DATE: 1A0/14/2015 HORNIA. PLAN AT BASE (SINGLE ACCESS) BUILDING



10/14/2015

OPM-0247-13: Reviewed for Code Compliance by William Staehlin

Page 14 of 20





www.EquipmentAnchorage.com

PENTAIR

јов no. **11-1461**

DES. J. ROBERSON

13

SHEET

FREE-STANDING ENCLOSURE SINGLE ACCESS

DATE 10/6/15

18 _{SHEETS}

SEISMIC SUPPORTS & ATTACHMENTS

CONCRETE SLAB ON METAL DECK

	FREE-STANDING SINGLE ACCESS											
MODEL	EMPTY CAB WEIGHT (lb.)	WEIGHT (lb.) INCLUDES CONTENTS	₹ (in.)	"A" (in.)	"B" (in.)	"C" (in.)	"D" (in.)	** Tu (lb.)	** Vu (lb.)			
A602418FS	234	1234	30.03	24.06	18.06	10.06	7.06	2479	509			
A722418FS	262	1262	36.03	24.06	18.06	10.06	7.06	3071	521			
A723018FS	298	1298	36.03	30.06	18.06	13.06	7.06	3026	535			
A723618FS	335	1335	36.03	36.06	18.06	16.06	7.06	3027	551			
A902420FS	328	1328	45.03	24.06	20.06	10.06	8.06	3643	548			
A903620FS	409	1409	45.03	36.06	20.06	16.06	8.06	3574	581			
A603624FS	336	1336	30.03	36.06	24.06	16.06	10.06	1801	551			
A722424FS	² 306 ₁	y: 1306 lia	m 36.03 a	24.06	24.06	10.06	10.06	2358	539			
A723024FS	343	1343	36.03	30.06	24.06	13.06	10.06	2288	554			
A723624FS	→376 I	ATE37610/	1 36.03	136.06	24.06	16.06	10.06	2257	568			
A903624FS	446	1446	45.03	36.06	24.06	16.06	10.06	3005	596			
A723630FS	424	1424	36.03	36.06	30.06	16.06	13.06	1852	587			
A723636FS	469	4 1469	36.03	36.06	36.06	16.06	16.06	1598	606			
A903636FS	550	1550	45.03	36.06	36.06	16.06	16.06	2152	639			

^{**} VALUES DO NOT INCLUDE $\Omega_{\!\scriptscriptstyle 0}$





EQUIPMENT ANCHORAGE & SEISMIC ENGINEERING www.EquipmentAnchorage.com SHEET DES. J. ROBERSON **PENTAIR** 11-1461 JOB NO. FREE-STANDING ENCLOSURE 10/6/15 **DUAL ACCESS** DATE SEISMIC SUPPORTS & ATTACHMENTS CONCRETE SLAB ON METAL DECK C.G. WT. = SEE SCHED (SHEET 15 OF 18) UNIT BASE C.G. (ASTM AIOII, 30 KSI MIN) (SEE SHEET 18 OF 18)

USE 4- 5/8"Φ (A36) THREADED RODS

PLATE WASHERS BY PENTAIR

(1/4" THK, A36 MIN, 4 TOTAL)

REFER TO SHEET 16 OF 18 FOR ADDITIONAL DETAILS

N.W. OR SAND L.W. CONC. (3000 PSI, MIN.)

THRU FLOOR

NOTES:

1>

1. FORCES ARE DETERMINED PER 2013 CALIFORNIA BUILDING CODE AND ASCE 7-10. STRENGTH DESIGN IS USED. (SDS = 2.20, 2p = 2.5, p = 1.5, p = 6.0, p = 2.5, p = 6.0, p = 2.5, p = 1.5, p = 6.0, p = 2.5, p = 1.5, p = 6.0, p = 2.5, p = 1.5, p = 6.0, p = 2.5, p = 1.5, p = 6.0, p = 2.5, p = 1.5, p = 6.0, p = 2.5, p = 1.5, p = 6.0, p = 2.5, p = 1.5, p = 6.0, p = 2.5, p = 1.5, p = 6.0, p = 2.5, p = 1.5, p = 6.0, p = 2.5, p = 1.5, p = 6.0, p = 2.5, p = 1.5, p = 6.0, p = 2.5, p = 1.5, p = 6.0, p = 2.5, p = 6.0, p = 6

HORIZONTAL FORCE (Eh) = 1.65 Wp HORIZONTAL FORCE (Emh) = 4.13 Wp (FOR CONCRETE ANCHORAGE) VERTICAL FORCE (Ev) = 0.44 Wp

 CENTER OF GRAVITY (C.G.) AND WEIGHT ARE THE GOVERNING PARAMETERS FOR DESIGN. THIS PREAPPROVAL ENCOMPASSES ALL WEIGHTS UP TO THE MAXIMUM WEIGHT SHOWN.

3. STRUCTURAL ENGINEER OF RECORD FOR THE BUILDING SHALL PROVIDE SUPPORT STRUCTURE DESIGNED TO SUPPORT WEIGHTS AND FORCES SHOWN IN COMBINATION WITH ALL OTHER LOADS THAT MAY BE PRESENT.



► Vu

SIDE ELEVATION

(DUAL ACCESS)

10/14/2015

FRONT ELEVATION

(DUAL ACCESS)

OPM-0247-13: Reviewed for Code Compliance by William Staehlin

Page 16 of 20



EQUIPMENT ANCHORAGE & SEISMIC ENGINEERING

www.EquipmentAnchorage.com

PENTAIR

DES. J. ROBERSON

11-1461

THRU FLOOR

15

SHEET


FREE-STANDING ENCLOSURE
DUAL ACCESS

DATE 10/6/15

JOB NO.

18 SHEETS

SEISMIC SUPPORTS & ATTACHMENTS

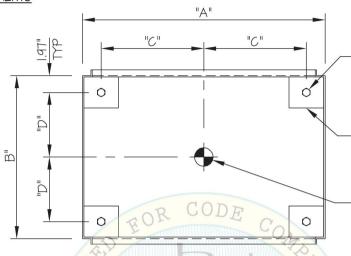

USE 4- 5/8"Φ (A36) THREADED RODS

CONCRETE SLAB ON METAL DECK

PLATE WASHERS BY PENTAIR (1/4" THK, A36 MIN, 4 TOTAL)

C.G. WT. = SEE SCHED $(\overline{Y} = SEE SCHED)$

PLANT AT BASE (DUAL ACCESS)

OPM - 0247 - 13

UNIT NUMBER	EMPTY CAB WEIGHT (lb.)	WEIGHT (Ib.) INCLUDES CONTENTS	lliam Y (in.)	"A" (in.)	"B" (in.)	"C" (in.)	"D" (in.)	* Tu (lb.)	* Vu (lb.)
A722424FSDA	324	1324TE:	36.031	424,06	24.06	10.06	10.06	2391	546
A723024FSDA	361	1361	36.03	30.06	24.06	13.06	10.06	2319	561
A723624FSDA	396	1396	36.03	36.06	24.06	16.06	10.06	2289	576
A903624FSDA	472	1472	45.03	36.06	24.06	16.06	10.06	3059	607
A722430FSDA	366	1366	36.03	24.06	30.06	10.06	13.06	2327	563
A722436FSDA	409	1409	36.03	24.06	36.06	10.06	16.06	2311	581
A723636FSDA	488	1488	36.03	36.06	36.06	16.06	16.06	1619	614
A903636FSDA	568	1568	45.03	36.06	36.06	16.06	16.06	2177	647

^{*} VALUES DO NOT INCLUDE $\Omega_{\!\scriptscriptstyle 0}$






EQUIPMENT ANCHORAGE & SEISMIC ENGINEERING www.EquipmentAnchorage.com DES. J. ROBERSON **PENTAIR**


FREE-STANDING ENCLOSURE

11-1461 JOB NO. 10/6/15 DATE

SHEET

SHEETS

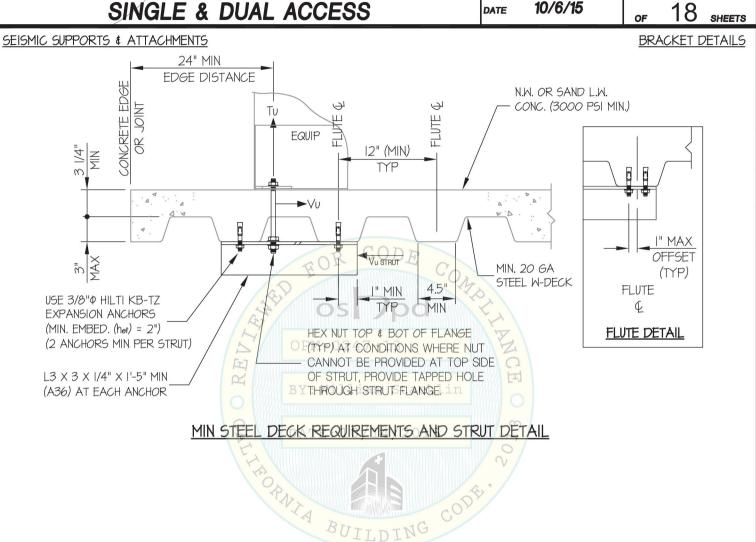




EQUIPMENT ANCHORAGE & SEISMIC ENGINEERING www.EquipmentAnchorage.com SHEET DES. J. ROBERSON **PENTAIR** 11-1461 JOB NO. FREE-STANDING ENCLOSURE 10/6/15 SINGLE & DUAL ACCESS DATE SHEETS SEISMIC SUPPORTS & ATTACHMENTS BRACKET DETAILS (ASTM AIOII CS TYPE B, I2 GA Fy=30 KSI MIN) 4"X4"X I/4" THK (A36) PLATE WASHER (PROVIDED BY PENTAIR) (4 PLACES) 1/8 V)G 1/16 1/8 // **VARIES** SIDE ELEVATION FRONT ELEVATION (SINGLE ACCESS) (4)- 11/16" HOLES 0 1/4" THK PLATE WASHER (A36 MIN) (BY MFR) (4 PLACES) 198.0 0 PLATE WASHER (4 PLACES) 1/8/1/2 (TYP) PLAN 1.26" No. 4197 EXP. 6-30-2016



EQUIPMENT ANCHORAGE & SEISMIC ENGINEERING www.EquipmentAnchorage.com SHEET DES. J. ROBERSON **PENTAIR**

FREE-STANDING ENCLOSURE

11-1461 JOB NO.

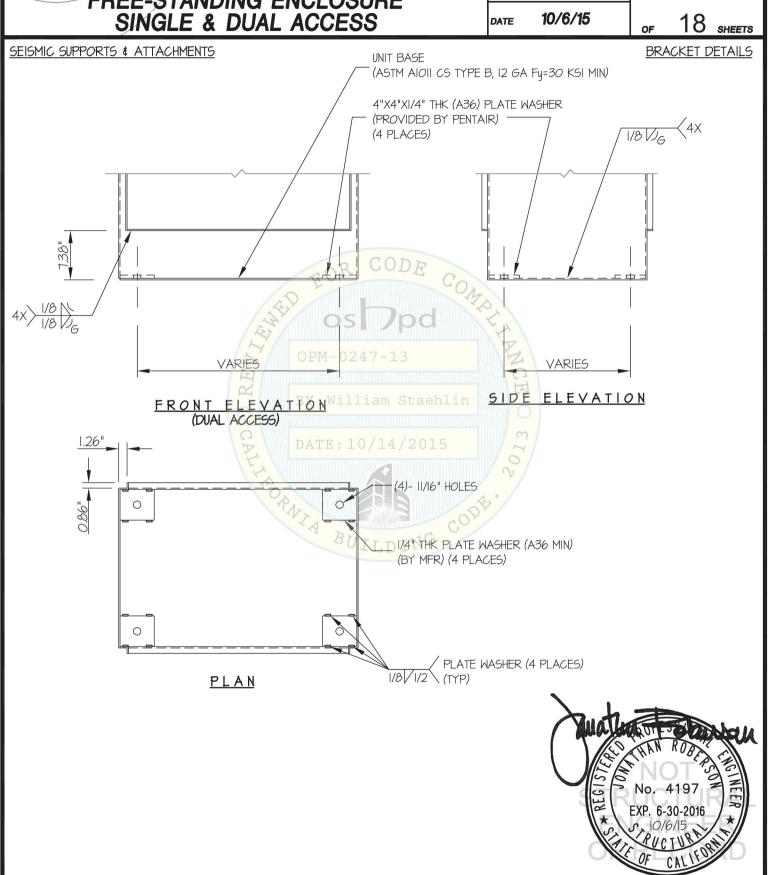

10/14/2015

OPM-0247-13: Reviewed for Code Compliance by William Staehlin

Page 20 of 20