

AUTOMATIC BATTERY CHARGER, SWITCHING BCG SERIES, FOR SEALED AND NOT SEALED LEAD-ACID BATTERIES, 1 CHARGING LEVEL. 24VDC OUTPUT, 10A



		- Section of	
Product designation Product type designation			Automatic battery chargers BCG Single phase automatic battery
Туре			charger 1 charging level for sealed and non- sealed lead-acid batteries
Power supply			
Rated voltage Us			
	min	VAC	110
	Max	VAC	240 ±10%
Operational frequency			
	min	Hz	50 ±10%
	max	Hz	60 ±10%
Power consumption			
	Max	VA	630
	Max	W	311
Internal fuse		Α	8
Charging cycle			
Reference standards			IEC62368-1
Battery type			non-sealed and sealed lead-acid batteries
Battery voltage		VDC	24
/			in pos. V1:27.6;
Charging voltage (Uc)			V2:27.0
Charging voltage (Uc) Boost		% Uc	V2:27.0 +4.4
Boost			+4.4
Boost Charging current (Ic)		Α	
Boost			+4.4 10 20 to 100 Main supply fuse; charging inhibition due to: 1. Short circuit at battery terminals; 2. Reverse battery polarity; 3. Low voltage at
Boost Charging current (Ic) Charging current adjustment		Α	+4.4 10 20 to 100 Main supply fuse; charging inhibition due to: 1. Short circuit at battery terminals; 2. Reverse battery polarity; 3. Low voltage at battery poles; 4.
Boost Charging current (Ic) Charging current adjustment		Α	+4.4 10 20 to 100 Main supply fuse; charging inhibition due to: 1. Short circuit at battery terminals; 2. Reverse battery polarity; 3. Low voltage at
Boost Charging current (Ic) Charging current adjustment Protections		Α	+4.4 10 20 to 100 Main supply fuse; charging inhibition due to: 1. Short circuit at battery terminals; 2. Reverse battery polarity; 3. Low voltage at battery poles; 4.
Boost Charging current (Ic) Charging current adjustment Protections Indications LED indicator for operating status		Α	+4.4 10 20 to 100 Main supply fuse; charging inhibition due to: 1. Short circuit at battery terminals; 2. Reverse battery polarity; 3. Low voltage at battery poles; 4. Output overload.
Boost Charging current (Ic) Charging current adjustment Protections Indications		Α	+4.4 10 20 to 100 Main supply fuse; charging inhibition due to: 1. Short circuit at battery terminals; 2. Reverse battery polarity; 3. Low voltage at battery poles; 4. Output overload.
Boost Charging current (Ic) Charging current adjustment Protections Indications LED indicator for operating status LED reverse battery polarity		Α	+4.4 10 20 to 100 Main supply fuse; charging inhibition due to: 1. Short circuit at battery terminals; 2. Reverse battery polarity; 3. Low voltage at battery poles; 4. Output overload.




ENERGY AND AUTOMATION


AUTOMATIC BATTERY CHARGER, SWITCHING BCG SERIES, FOR SEALED AND NOT SEALED LEAD-ACID BATTERIES, 1 CHARGING LEVEL. 24VDC OUTPUT, 10A

Rated capacity				5A 30VDC
Mechanical features				
Housing type				Internal panel
- Iodaing type				mounting
Terminals type				Fixed
Eiving				35mm DIN rail or
Fixing				Screw fixing
Weight			g	710
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-30
		max	°C	+55
	Storage temperature			
		min	°C	-30
		max	°C	+80
Protection degree				IP20
Dimensions [mm (in)]				

Dimensions [mm (in)]

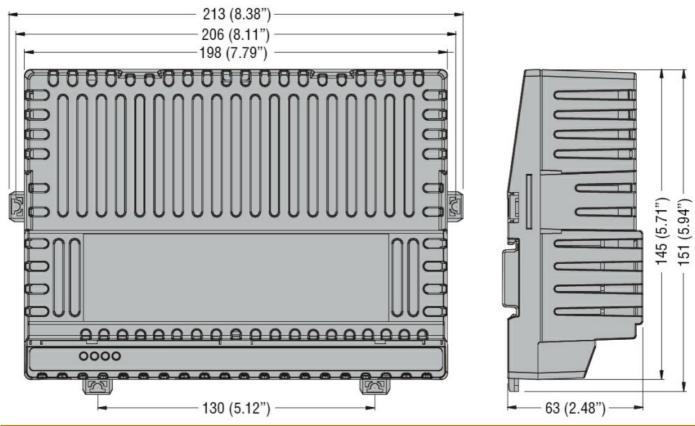

Wiring diagrams

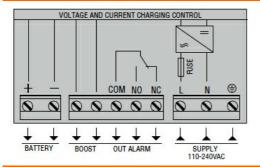

Certifications and compliance



BCG1024

AUTOMATIC BATTERY CHARGER, SWITCHING BCG SERIES, FOR SEALED AND NOT SEALED LEAD-ACID BATTERIES, 1 CHARGING LEVEL. 24VDC OUTPUT, 10A

Compliance

CSA C22.2 n°60950-1 IEC/EN/BS 61000-6-2 IEC/EN/BS 61000-6-3 IEC/EN/BS 62368-1 UL 60950-1

Certificates

cURus

EAC

ETIM classification

ETIM 8.0

EC000359 -Universal charger