



Product designation	Variable speed drives		
Product type designation	VLB3		
General characteristics			
Rated power supply voltage	400...480VAC 50/60Hz		
Rated output voltage	VAC	Three-phase 0... 480VAC 0-599Hz	
Rated output current	A	150	
Rated output power	kW	75	
Rated output power	HP	100 (Heavy load) / 120 (Standard load)	
EMC filter	Built-in EMC suppressor cat. C2		
Technical features			
Input type	Three-phase		
Rated mains voltage	VAC	400...480	
Operating mains voltage range	VAC	340...528	
Rated mains frequency	Hz	50/60	
Operating mains frequency range	Hz	45...65	
Rated mains current with mains choke	135 (heavy load) / 160 (standard load)		
Output type	Three-phase		
Output voltage range	VAC	0...480	
Output frequency range	Hz	0...599	
Current overload	%/s	150% for 60s; 200% for 3s	
Apparent output power	100 (heavy load) / 121 (standard load)		
Power loss	4kHz: 1640W (heavy load) / 1961 (standard load)		
Brake chopper	Yes		
Switching frequency	2...16kHz		
Max motor cable length	Shielded		
	Without EMC category	m	200
	Category C1	m	3
	Category C2	m	20
	Category C3	m	100
	Unshielded		

Without EMC category m 200

Functions

Motor control modes	V/f linear, quadratic torque, sensorless vector control, ECO mode, servo control with encoder feedback, multipoint V/f curve, V/f closed loop control with encoder feedback, torque setpoint, sensorless
Speed reference signals	External potentiometer 0...10kΩ Voltage signals: 0...10VDC or -10...+10VDC Current signals: 0/4...20mA Buttons on front keyboard Door-mount installation kit 15 preset speeds via digital inputs Motor potentiometer
3-wire control	Yes
S-shape curves	Yes
Slip compensation	Yes
Flying restart	Yes
Access to DC bus	Yes
DC braking	Yes
DC injection at start	Yes
PID control	Yes, with sleep and rinse function
Sequencer (programmable frequency/time cycles)	Yes
Preset speeds	Yes
Motorpotentiometer	Yes
Different parameter configuration sets	Yes
Parameters changeover function	Yes
Favorite parameters menu	Yes
Autotuning	No
Safe torque Off (STO) safety function	Optional
PTC probe input	Yes

Protections	Overcurrent Output short circuit and earth/ground leakage Overvoltage Undervoltage Phase loss Motor heat overload (i2t) Overspeed Speed reverse
-------------	--

Special funct.	Multi-pump PID control (1 main pump frequency regulated + 2 auxiliary pumps activated in direct mode in case of necessity)
----------------	--

Input and Output

Number of digital input	Nr.	5
-------------------------	-----	---

Digital input type	Selectable PNP or NPN logic
--------------------	-----------------------------

Number of digital output	Nr.	2
--------------------------	-----	---

Digital output arrangement	1 relay output with changeover contact (C/O-SPDT) + 1 digital output
----------------------------	--

Output contacts ratings	Relay output: 3A 250VAC Digital output: 100mA max 30VDC
-------------------------	--

Number of analog input	Nr.	2
------------------------	-----	---

Analog input type	Configurable 0/2...10VDC, -10...+10VDC, 0...5VDC, 0/4...20mA
-------------------	--

Number of analog output	Nr.	1
-------------------------	-----	---

Analog output type	configurable as 0...10VDC, 0...5VDC, 2...10VDC, 0/4...20mA
--------------------	--

Ambient conditions


Temperature	Operating temperature	min	°C	-10
		max	°C	+55

			switching frequency 2 or 4kHz: 2.5%/°C over 45°C switching frequency 8 or 16kHz: 2.5%/°C over 40°C
	Current derating		
	Storage temperature		
	min	°C	-25
	max	°C	+60
Relative humidity		%	5...95% (with no condensing)
Max altitude		m	4000m (over 1000m derate the rated current by 5%/1000m)
Maximum Pollution degree			2
Overvoltage category			III up to 2000m altitude (II above 2000m)

Housing


Installation position	Vertical
IP degree of protection	IP20
Dimensions (W x H x D)	mm 250 x 623 x 265
Weight	Kg 24

Dimensions [mm (in)]

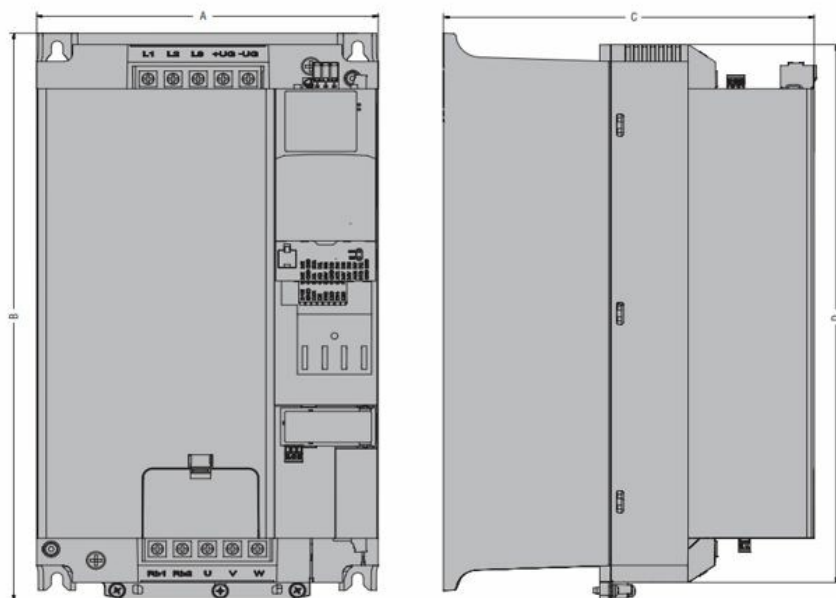

A	B	C	D
250	623	265	536

Wiring diagrams

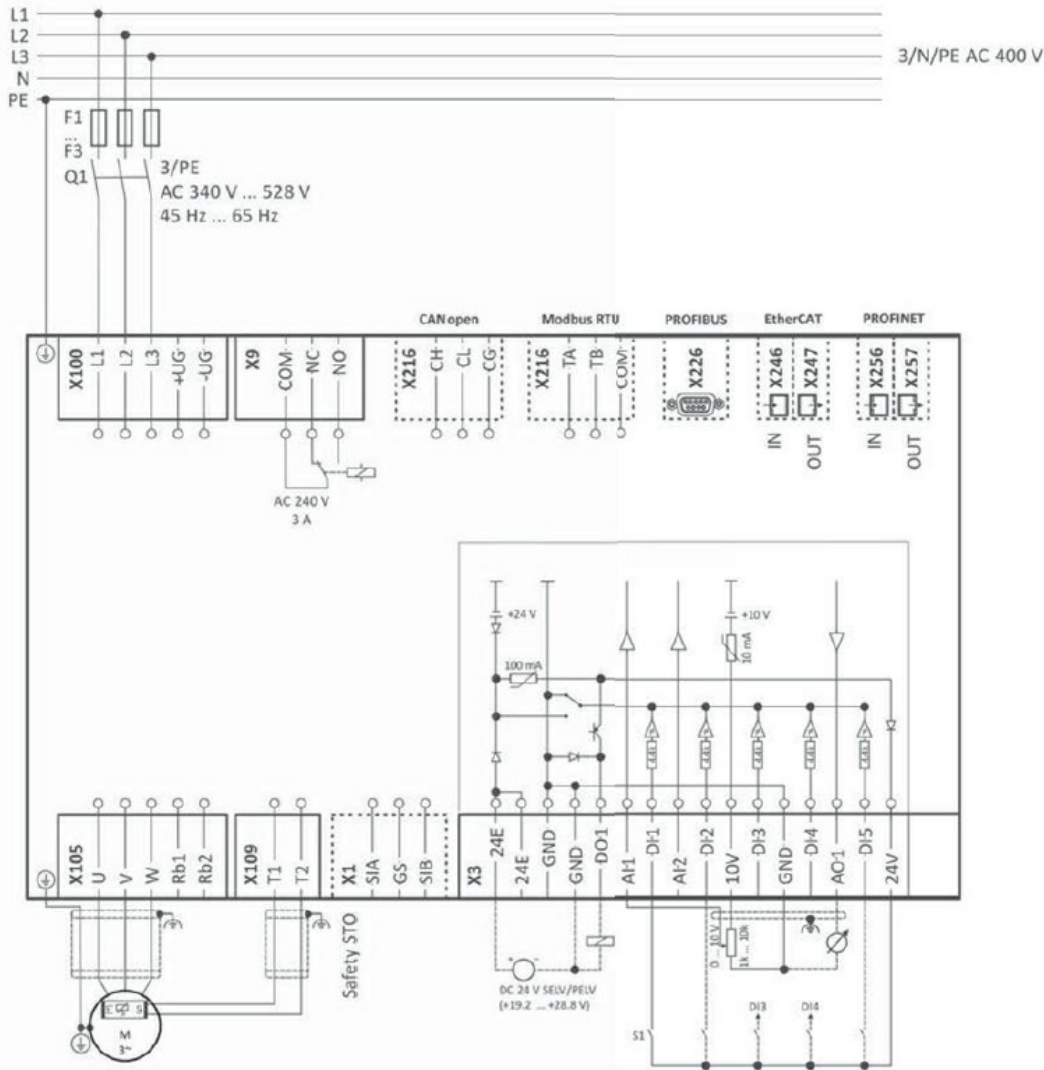

Certifications and compliance

Compliance

CSA 22.2 n°274
EN 61800-5-1
UL61800-5-1

Certificates

CSA
cULus
EAC
RCM

ETIM classification

ETIM 8.0

EC001857 -
Frequency
converter =< 1 kW