


# NE-4100 Series

## 10/100 Mbps embedded serial device servers

NE-4110S/4110A

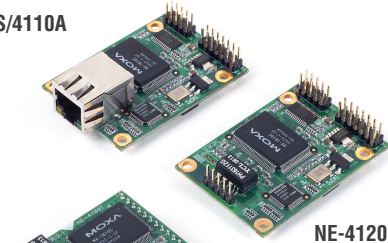

NE-4120S/4120A

NE-4100T

- > 10/100 Mbps Ethernet interface
- > Up to 230.4 Kbps baudrate support
- > Choice of operation modes: Real COM, TCP Server, TCP Client, and UDP
- > DHCP, BootP, Static IP, and ARP supported
- > SNMP and e-mail alerts for event trapping and notification
- > Half the size of a credit card—only 57 × 40 mm
- > Low power consumption at 1.5W, with single +5V input



### Overview

Moxa's NE-4100 embedded device servers are designed for manufacturers who want to add sophisticated network connectivity to their serial devices. Moxa's embedded device servers can be used to convert any device with a standard serial interface to an Ethernet-enabled device in no time. The NE-4100 embedded device servers

support 10/100 Mbps Ethernet, and provide ready-to-use operation modes, including TCP Server, TCP Client, and UDP. In addition, a Real COM driver is included for backward compatibility with legacy software.



### SNMP and E-mail Alerts for Event Trap and Notification

NE-4100 embedded device servers can be configured to send an SNMP trap or e-mail under the following conditions:

- Cold/warm start
- Password authentication failure
- Change in DSR/DCD line signal
- Change in IP address
- Change in password


### Dimensions and Pin Assignment

NE-4110S/4110A



PIN	Signals
1	Tx+
2	Tx-
3	Rx+
6	Rx-

NE-4120S/4120A



J3  
Ethernet  
Pin-header

1	Tx+
2	Tx-
3	
4	Rx+
5	Rx-

NE-4110/4120 Series


J2	
GND	14 13 VCC(+5V)
GND	12 11 VCC(+5V)
DIO0	10 9 10M_LED
DIO1	8 7 100M_LED
DIO2	6 5 Ready_LED
DIO3	4 3 Reset
TxD1	2 1 RxD1

NE-4110S/4120S

J1	
NC	10 9 NC
CTS0	8 7 RTS0
DSR0	6 5 GND
DTR0	4 3 TxD0
RxD0	2 1 DCDO

NE-4110T

Pin No.	Signal
1	ETx+
2	ETx-
3	ERx+
4	ERx-
5	LED 10M
6	TxD0
7	RxD0
8	RTS0
9	CTS0
10	Reset
11	GND
12	GND
13	TxD1



Pin No.	Signal
14	PI00
15	PI01
16	PI02
17	PI03
18	LED 100M
19	DCDO
20	DSR0
21	DTR0
22	GND
23	Ready LED
24	+5V
25	+5V (45 × 36 mm, 26-pin DIL package)
26	RxD1 2.54 mm pitch)

NE-4110A/4120A

J1	
NC	10 9 NC
NC	8 7 NC
NC	6 5 GND
RxD- (Data-)	4 3 RxD+ (Data+)
TxD+	2 1 TxD-

For 2-wire RS-485 mode, Pin 3 is Data+, Pin 4 is Data-

## Specifications

### Form Factor

#### Type:

NE-4110/4120: Ready-to-go stand-alone modules  
NE-4100T: 26-pin dual-in-line package

#### Dimensions:

NE-4110/4120: 57 × 40 mm (2.24 x 1.57 in)  
NE-4100T: 45 × 36 mm (1.77 x 1.42 in)

#### Weight:

NE-4110S/4110A: 40 g  
NE-4120S/4120A/4100T: 20 g

### Ethernet Interface

#### Number of Ports: 1

**Speed:** 10/100 Mbps, auto MDI/MDIX

#### Connector:

NE-4110 Series: RJ45  
NE-4120 Series: 5-pin pin header  
NE-4100T: 26-pin dual-in-line

**Magnetic Isolation Protection:** 1.5 KV built-in

### Serial Interface

#### Number of Ports: 2

#### Serial Standards:

- Port 1:
  - NE-4110S/4120S: RS-232
  - NE-4110A/4120A: RS-422, RS-485-4w, RS-485-2w
  - NE-4100T: TTL
- Port 2:
  - TTL console port

**RS-485 Data Direction Control:** ADDC® (automatic data direction control)

### Serial Communication Parameters

**Data Bits:** 5, 6, 7, 8

**Stop Bits:** 1, 1.5, 2

**Parity:** None, Even, Odd, Space, Mark

**Flow Control:** DSR/DTR and RTS/CTS (RS-232 only), XON/XOFF

**Baudrate:** 110 bps to 230.4 Kbps

### Serial Signals

#### TTL:

- Port 1: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
- Port 2: TxD, RxD, GND

**RS-232:** TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND

**RS-422:** Tx+, Tx-, Rx+, Rx-, GND

**RS-485-4w:** Tx+, Tx-, Rx+, Rx-, GND

**RS-485-2w:** Data+, Data-, GND

### Digital I/O Pins

**GPIO:** 4 programmable I/O pins

### Software

**Network Protocols:** ICMP, ARP, IP, TCP, UDP, DHCP, Telnet, HTTP, SNMP V1/V2c, SMTP

**Configuration Options:** Web Console, Serial Console, Telnet Console, Windows Utility

**Windows Real COM Drivers:** Windows 95/98/ME/NT/ 2000, Windows XP/2003/Vista/2008/7 x86/64, Embedded CE 5.0/6.0, XP Embedded

**Fixed TTY Drivers:** SCO Unix, SCO OpenServer, UnixWare 7, UnixWare 2.1, SVR 4.2, QNX 4.25, QNX 6, Solaris 10, FreeBSD, AIX 5.x, HP-UX 11i

**Linux Real TTY Drivers:** Linux kernel 2.4.x, 2.6.x

**Operation Modes:** Real COM, TCP Server, TCP Client, UDP

### Environmental Limits

#### Operating Temperature:

Standard Models: 0 to 55°C (32 to 131°F)  
Wide Temp. Models: -40 to 75°C (-40 to 167°F)

**Operating Humidity:** 5 to 95% RH

**Storage Temperature:** -40 to 75°C (-40 to 167°F)

### Power Requirements

**Input Voltage:** 5 VDC (±5%)

**Power Consumption:** 290 mA @ 5 VDC max.

### Regulatory Approvals

**EMC:** CE EN55022 Class A, FCC Part 15 Subpart B Class A

### Reliability

**Automatic Reboot Trigger:** Built-in WDT (watchdog timer)

#### MTBF (mean time between failures):

NE-4100T: 288173 hrs  
NE-4110A: 289573 hrs  
NE-4110S: 290276 hrs  
NE-4120A: 289573 hrs  
NE-4120S: 285874 hrs

### Warranty

**Warranty Period:** 5 years

**Details:** See [www.moxa.com/warranty](http://www.moxa.com/warranty)

## Ordering Information

### Available Modules

**NE-4110S:** Device server module for RS-232 devices, supports 10/100BaseT(x) with RJ45 connector

**NE-4110A:** Device server module for RS-422/485 devices, supports 10/100BaseT(x) with RJ45 connector

**NE-4120S:** Device server module for RS-232 devices, supports 10/100BaseT(x) with 5-pin Ethernet pin header

**NE-4120A:** Device server module for RS-422/485 devices, supports 10/100BaseT(x) with 5-pin Ethernet pin header

**NE-4100T:** Device server module for TTL devices, supports 10/100BaseT(x) with DIL package

### Available Starter Kits

**NE-4110-ST:** Starter kit for the NE-4110S and NE-4110A (module not included)

**NE-4120-ST:** Starter kit for the NE-4120S and NE-4120A (module not included)

**NE-4100-ST:** Starter kit for the NE-4100T (module not included)

**Note:** Starter kits do not include the NE-4100 module. Please order modules and evaluation kits separately.

### Package Checklist (modules)

- NE-4100 series module

### Package Checklist (starter kits)

- NE-4100 or NE-4110 or NE-4120 evaluation board
- Universal power adaptor
- 2 power cords
- Null modem cable
- Cross-over Ethernet cable
- Document and Software CD
- Quick Installation Guide (printed)
- Warranty Card