

# NPort® 5100 Series

## 1-port RS-232/422/485 serial device servers



- > Small size for easy installation
- > Real COM/TTY drivers for Windows and Linux
- > Standard TCP/IP interface and versatile operation modes
- > Easy-to-use Windows utility for configuring multiple device servers
- > Built-in 15 KV ESD protection for all serial signals
- > SNMP MIB-II for network management
- > Configure by Telnet or web browser
- > Adjustable termination resistor for RS-485 ports



### : Overview

NPort® 5100 device servers are designed to make serial devices network-ready in an instant. The small size of the servers makes them ideal for connecting devices such as card readers and payment

terminals to an IP-based Ethernet LAN. Use the NPort® 5100 device servers to give your PC software direct access to serial devices from anywhere on the network.

### : Most Cost-effective Serial-to-Ethernet Solution

Using serial device servers to connect legacy serial devices to Ethernet is now commonplace, and users expect device servers to be cost-effective and to provide a broad selection of useful functions. With

their full support of Microsoft and Linux operating systems and solid 5-year warranty, the NPort® 5100 series device servers provide the best choice for serial-to-Ethernet converters.

### : Standard TCP/IP Interface and Broad Choice of Operation Modes

The NPort® 5100 device servers can be configured for TCP Server, TCP Client, UDP Server/Client, Pair Connection, or Ethernet Modem

mode, ensuring compatibility with software based on a standard network API (e.g., Winsock or BSD Sockets).

### : Real COM/TTY Drivers for Existing Software

The Real COM/TTY drivers provided with the NPort® 5100 device servers allow you to continue using software designed for communicating through COM/TTY ports. Installation and configuration is painless, and allows your serial devices and PC to communicate


seamlessly over a TCP/IP network. Using Moxa's Real COM/TTY drivers is an excellent way to preserve your software investment, while still allowing you to enjoy the benefits of networking your serial devices.

### : Easy to Troubleshoot

NPort® 5100 device servers support SNMP, which can be used to monitor all units over Ethernet. Each unit can be configured to send trap messages automatically to the SNMP manager when user-defined errors are encountered. For users who do not use SNMP manager, an

e-mail alert can be sent instead. Users can define the trigger for the alerts using Moxa's Windows utility, or the web console. For example, alerts can be triggered by a warm start, a cold start, or a password change.

**Appearance**

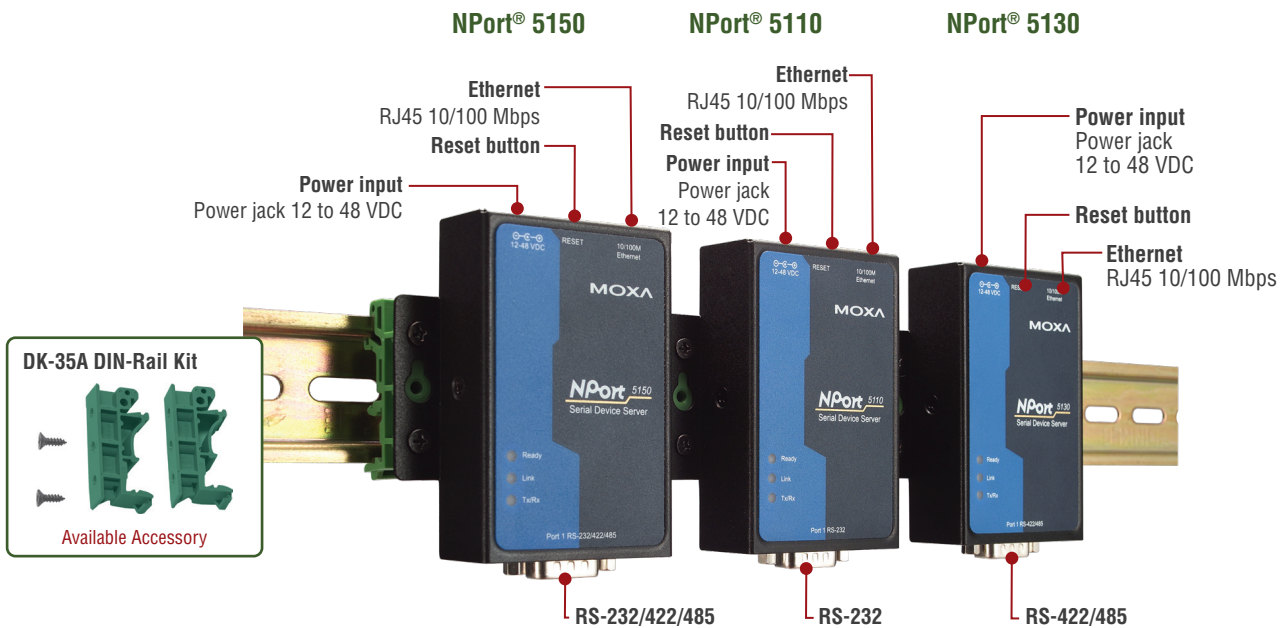

**Specifications**

**Ethernet Interface**

- Number of Ports:** 1
- Speed:** 10/100 Mbps, auto MDI/MDIX
- Connector:** 8-pin RJ45
- Magnetic Isolation Protection:** 1.5 KV built-in

**Serial Interface**

- Number of Ports:** 1
- Serial Standards:**
  - NPort® 5110: RS-232
  - NPort® 5130: RS-422/485
  - NPort® 5150: RS-232/422/485
- Connector:** DB9 male
- Serial Line Protection:** 15 KV ESD protection for all signals
- RS-485 Data Direction Control:** ADDC® (automatic data direction control)
- Pull High/Low Resistor for RS-485:** 1 KΩ, 150 KΩ

**Serial Communication Parameters**

- Data Bits:** 5, 6, 7, 8
- Stop Bits:** 1, 1.5, 2
- Parity:** None, Even, Odd, Space, Mark
- Flow Control:** RTS/CTS and DTR/DSR (RS-232 only), XON/XOFF
- Baudrate:**
  - NPort® 5110: 110 bps to 230.4 Kbps
  - NPort® 5130/5150: 50 bps to 921.6 Kbps

**Serial Signals**

- RS-232:** TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
- RS-422:** Tx+, Tx-, Rx+, Rx-, GND
- RS-485-4w:** Tx+, Tx-, Rx+, Rx-, GND
- RS-485-2w:** Data+, Data-, GND

**Software**

- Network Protocols:** ICMP, IP, TCP, UDP, DHCP, BOOTP, Telnet, DNS, SNMP V1, HTTP, SMTP
- Configuration Options:** Web Console, Serial Console (NPort® 5110/5150 only), Telnet Console, Windows Utility
- Windows Real COM Drivers:** Windows 95/98/ME/NT/2000, Windows XP/2003/Vista/2008/7 x86/x64, Embedded CE 5.0/6.0, XP Embedded

- Fixed TTY Drivers:** SCO Unix, SCO OpenServer, UnixWare 7, UnixWare 2.1, SVR 4.2, QNX 4.25, QNX 6, Solaris 10, FreeBSD, AIX 5.x, HP-UX 11i
- Linux Real TTY Drivers:** Linux kernel 2.4.x, 2.6.x

**Physical Characteristics**

- Housing:** Metal
- Weight:** 340 g
- Dimensions:**
  - Without ears: 52 x 80 x 22 mm (2.05 x 3.15 x 0.87 in)
  - With ears: 75.2 x 80 x 22 mm (2.96 x 3.15 x 0.87 in)

**Environmental Limits**

- Operating Temperature:**
  - Standard Models: 0 to 55°C (32 to 131°F)
  - Wide Temp. Models: -40 to 75°C (-40 to 167°F)
- Operating Humidity:** 5 to 95% RH
- Storage Temperature:** -20 to 85°C (-4 to 185°F)

**Power Requirements**

- Input Voltage:** 12 to 48 VDC
- Power Consumption:**
  - NPort® 5110: 128.7 mA @ 12 V, 72 mA @ 24 V
  - NPort® 5130/5150: 200 mA @ 12 V, 106 mA @ 24 V

**Regulatory Approvals**

- EMC:** CE (EN55022 Class A, EN55024), FCC Part 15 Subpart B Class A
- Safety:** UL (UL60950-1), TÜV (EN60950-1)

**Reliability**


- Automatic Reboot Trigger:** Built-in WDT (watchdog timer)
- MTBF (mean time between failures):**
  - NPort® 5110: 279122 hrs
  - NPort® 5130: 246505 hrs
  - NPort® 5150: 246034 hrs

**Warranty**


- Warranty Period:** 5 years
- Details:** See [www.moxa.com/warranty](http://www.moxa.com/warranty)

Dimensions


NPort® 5110

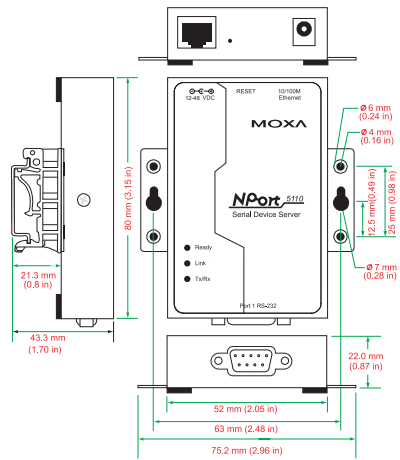

NPort® 5130

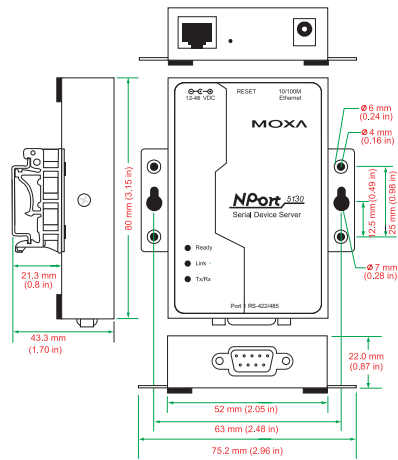


NPort® 5150

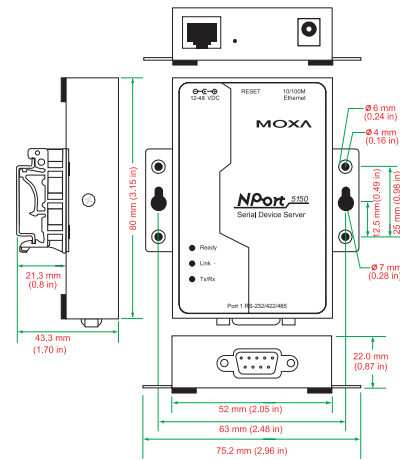

Pin Assignment

DB9 male connector



NPort® 5110 (RS-232)

PIN	RS-232
1	DCD
2	RxD
3	TxD
4	DTR
5	GND
6	DSR
7	RTS
8	CTS

NPort® 5130 (RS-422/485)

PIN	RS-422/485-4w	RS-485-2w
1	TxD-(A)	-
2	TxD+(B)	-
3	RxD+(B)	Data+(B)
4	RxD-(A)	Data-(A)
5	GND	GND
6	-	-
7	-	-
8	-	-

NPort® 5150 (RS-232/422/485)

PIN	RS-232	RS-422/485-4w	RS-485-2w
1	DCD	TxD-(A)	-
2	RxD	TxD+(B)	-
3	TxD	RxD+(B)	Data+(B)
4	DTR	RxD-(A)	Data-(A)
5	GND	GND	GND
6	DSR	-	-
7	RTS	-	-
8	CTS	-	-

Ordering Information

Available Models

- NPort® 5110: 1-port RS-232 device server, 0 to 55°C operating temperature
- NPort® 5130: 1-port RS-422/485 device server, 0 to 55°C operating temperature
- NPort® 5150: 1-port RS-232/422/485 device server, 0 to 55°C operating temperature
- NPort® 5110-T: 1-port RS-232 device server, -40 to 75°C operating temperature

Optional Accessories (can be purchased separately)

DK-35A: Mounting Kit for 35-mm DIN-Rail

Package Checklist

- NPort® 5100 series device server
- Power Adaptor (only for non-T models)
- Document and Software CD
- Quick Installation Guide (printed)
- Warranty Card



www.remotesiteproducts.com  
Office: (888)532-2706