

# REL-FO/L-110DC/2X21 - Single relay



1308307

<https://www.phoenixcontact.com/us/products/1308307>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Plug-in miniature relay, FASTON connection, 2 changeover contacts, status display: LED (yellow), Input voltage: 110 V DC

## Commercial data

Item number	1308307
Packing unit	10 pc
Minimum order quantity	10 pc
Sales key	C460
Product key	CKF935
GTIN	4063151558239
Weight per piece (including packing)	24.29 g
Weight per piece (excluding packing)	22.22 g
Customs tariff number	85364900
Country of origin	CN

# REL-FO/L-110DC/2X21 - Single relay



1308307

<https://www.phoenixcontact.com/us/products/1308307>

## Technical data

### Notes

Notes on operation	Do not use to separate SELV/PELV circuits from other circuits, because safe isolation is not guaranteed. (applies to the optocoupler variants)
Notes on operation	The outputs are not suitable for switching different outer conductors.
Notes on operation	The system installer must ensure the touch protection of the product (at voltages > 25 V AC/60 V DC). The product is a built-in device without protection against direct contact.

### Product properties

Product type	Single relay
Product family	ESSENTIAL edition
Operating mode	100% operating factor
Mechanical service life	approx. $5 \times 10^7$ cycles
Relay type	Electromechanical relay

### Insulation characteristics: Air clearances and creepage distances between the power circuits

Insulation	Basic insulation
Overvoltage category	II
Pollution degree	3

### Data management status

Date of last data management	12.11.2024
------------------------------	------------

### Electrical properties

Maximum power dissipation for nominal condition	0.9 W
Test voltage (Winding/contact)	5 kV <sub>rms</sub> (50 Hz, 1 min., winding/contact)
Test voltage (Changeover contact/changeover contact)	3 kV <sub>rms</sub> (50 Hz, 1 min., changeover contact/changeover contact)
Test voltage ( )	1 kV <sub>rms</sub> (50 Hz, 1 min., open contact)

### Air clearances and creepage distances between the power circuits

Rated insulation voltage	250 V AC
Rated surge voltage	2.5 kV

### Input data

#### Coil side

Nominal input voltage $U_N$	110 V DC
Input voltage range	77 V DC ... 121 V DC
Drive and function	monostable
Drive (polarity)	non-polarized
Typical input current at $U_N$	6 mA
Input power dissipation for $U_N$	0.66 W
Typical response time	2 ms ... 10 ms

# REL-FO/L-110DC/2X21 - Single relay



1308307

<https://www.phoenixcontact.com/us/products/1308307>

Typical release time range	5 ms ... 20 ms
Status display	LED (yellow)
Coil resistance	18870 $\Omega$ $\pm$ 10 %

## Output data

### Switching

Contact switching type	2 changeover contacts
Type of switch contact	Single contact
Contact material	AgSnO
Maximum switching voltage	250 V AC 30 V DC
Minimum switching voltage	5 V (10 mA)
Limiting continuous current	8 A
Maximum inrush current	16 A (20 ms, N/O contacts)
Min. switching current	10 mA (5 V)
Interrupting rating (ohmic load) max.	192 W (24 V DC) 240 W (30 V DC) 2000 VA (250 V AC)

## Connection data

Connection method	FASTON connection
-------------------	-------------------

## Dimensions

Width	13 mm
Height	31.1 mm
Depth	29 mm

## Environmental and real-life conditions

### Ambient conditions

Degree of protection (Relay)	RT II (Relay)
Degree of protection (Installation location)	IP54 (Installation location)
Ambient temperature (operation)	-40 °C ... 70 °C
Ambient temperature (storage/transport)	-40 °C ... 70 °C
Altitude	$\leq$ 2000 m

## Standards and regulations

Standards/regulations	IEC 61810-1 IEC 60664-1
-----------------------	----------------------------

### Air clearances and creepage distances between the power circuits

Standards/regulations	IEC 60664-1
-----------------------	-------------

## Mounting


Mounting position	any
-------------------	-----

1308307

<https://www.phoenixcontact.com/us/products/1308307>

## Drawings

Diagram

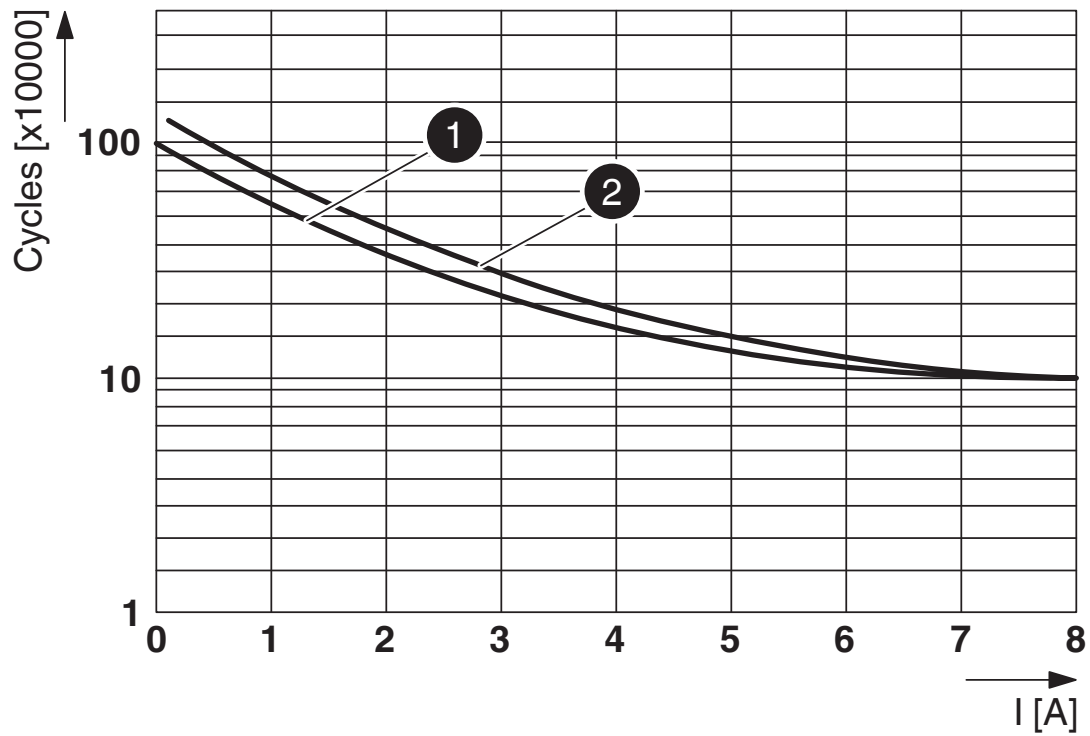

Electrical service life

- 1) 30 V DC resistance load
- 2) 250 V AC resistance load


# REL-FO/L-110DC/2X21 - Single relay



1308307


<https://www.phoenixcontact.com/us/products/1308307>

Diagram

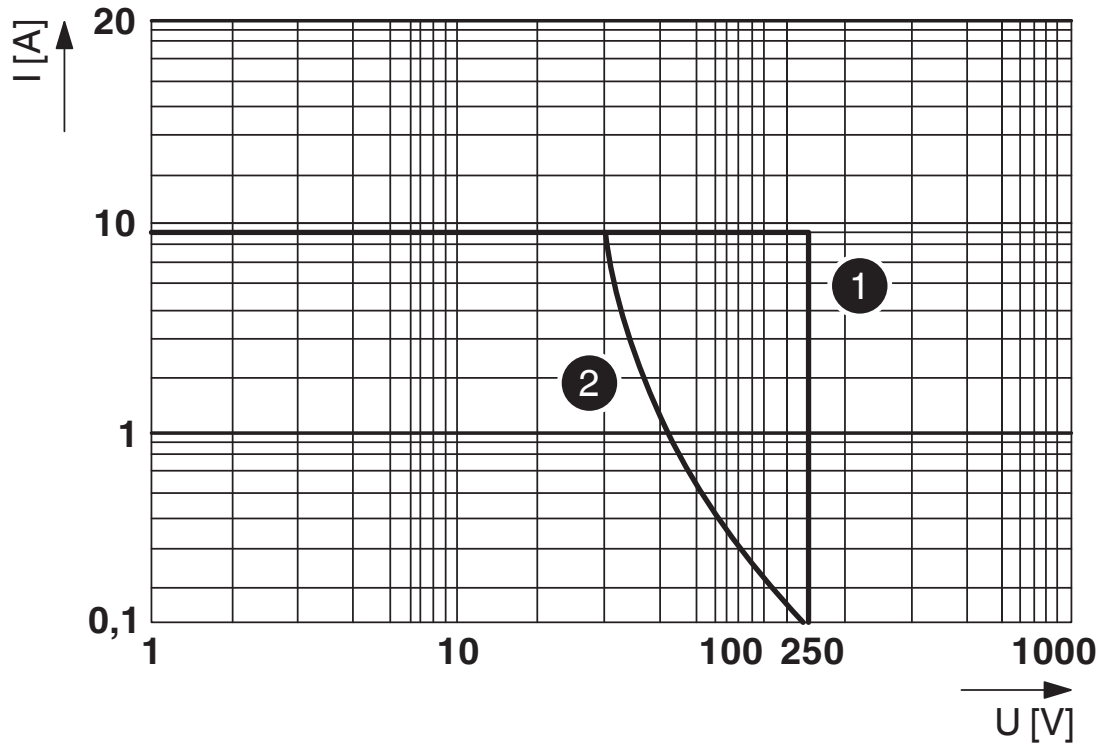


Interrupting rating  
1) AC, ohmic load  
2) DC, ohmic load

Diagram

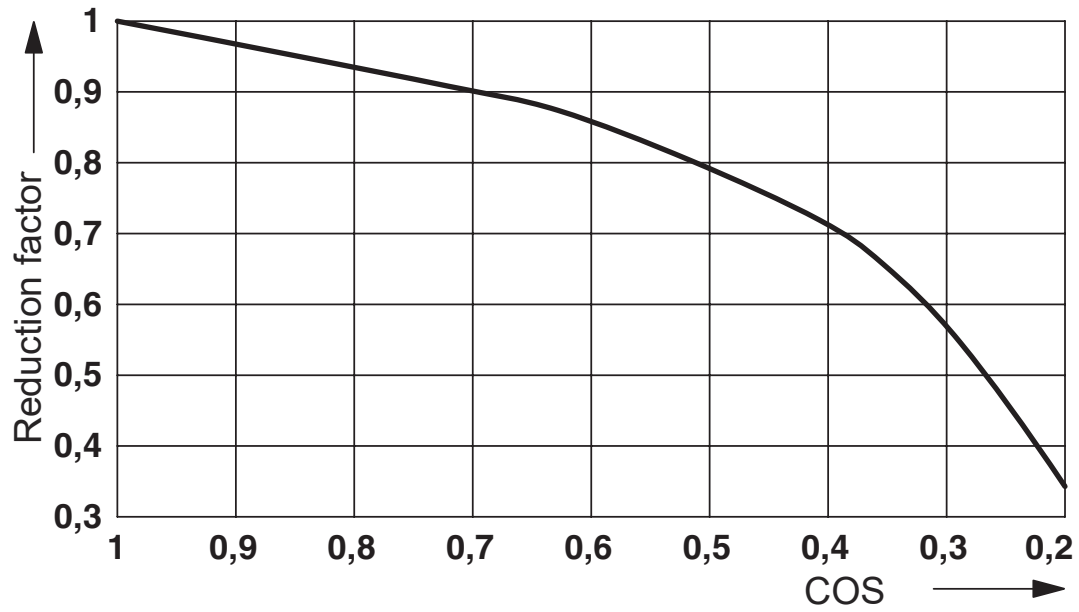

Service life reduction factor with various cos phi

Diagram

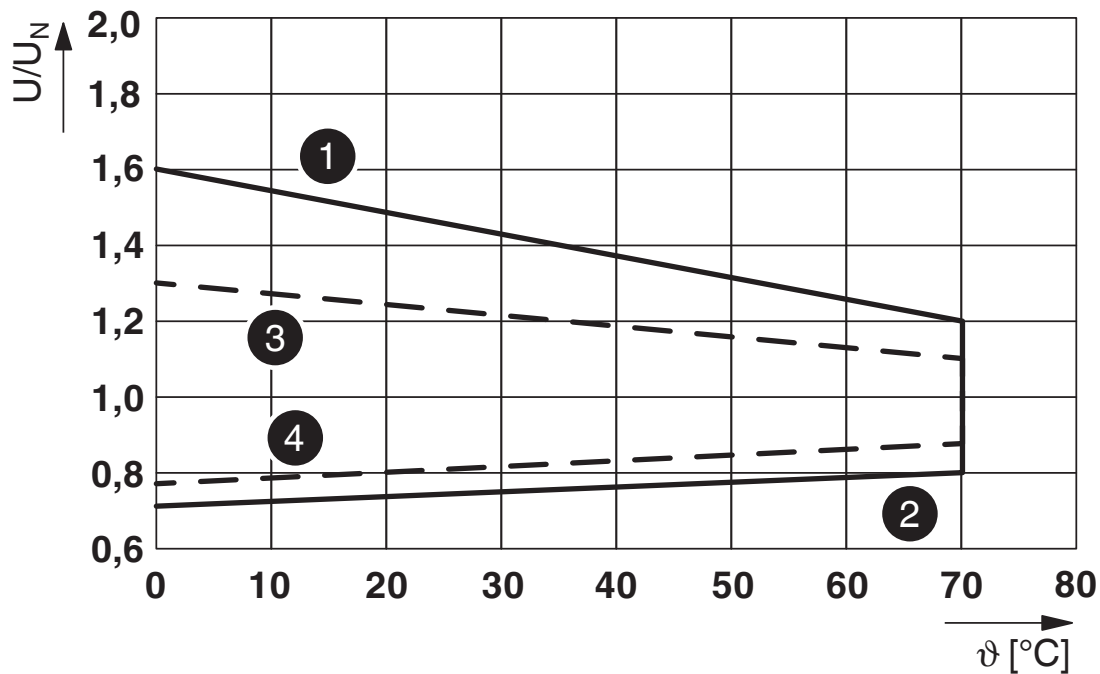

- 1) DC coil: maximum continuous voltage at limiting continuous current
- 2) DC coil: minimum operate voltage for pre-excitation with UN and limiting continuous current
- 3) AC coil: maximum continuous voltage at limiting continuous current
- 4) AC coil: minimum operate voltage for pre-excitation with UN and limiting continuous current

# REL-FO/L-110DC/2X21 - Single relay



1308307

<https://www.phoenixcontact.com/us/products/1308307>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1308307>



**cUL Recognized**  
Approval ID: FILE E 172140



**UL Recognized**  
Approval ID: FILE E 172140

**cULus Recognized**



# REL-FO/L-110DC/2X21 - Single relay



1308307

<https://www.phoenixcontact.com/us/products/1308307>

## Classifications

### ECLASS

ECLASS-11.0	27371601
ECLASS-12.0	27371601
ECLASS-13.0	27371601

### ETIM

ETIM 9.0	EC001437
----------	----------

# REL-FO/L-110DC/2X21 - Single relay



1308307

<https://www.phoenixcontact.com/us/products/1308307>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)