

# PLD M 260 W-85/95 190/D40/SC

**LED machine light, 24 V DC, IP67 protection,  
85°/95° emission angle, 40 mm diameter,  
M12 connector, can be connected in series**



Data sheet  
107785\_en\_00

© PHOENIX CONTACT 2017-02-16

## 1 Description

This LED machine light is designed to provide illumination inside or on machinery.

You can use the light in harsh environments.

This is possible thanks to:

- The high degree of protection
- Resistance to common cooling agents and lubricants
- Resistance to vibrations and shock
- The 4 mm thick safety glass

The small diameter of just 40 mm enables mounting even where space is at a premium.

Mounting is by means of holders or brackets (neither of which are supplied as standard) in which the light can swivel and the lighting can therefore be optimally aligned.

To reduce the cabling effort for longer machines, the lights can be switched in series.

### Features

- Length: 190 mm
- Diameter: 40 mm
- 24 V DC supply voltage
- M12 connectors
- Color temperature 5000 K
- Emission angle 85°/95°
- Can be swiveled up to  $\pm 45^\circ$  using accessories
- Resistant to cooling agents and lubricants
- Can be switched in series
- IP67 degree of protection




Make sure you always use the latest documentation.  
It can be downloaded from the product at [phoenixcontact.net/products](https://phoenixcontact.net/products).

<b>2</b>	<b>Table of contents</b>	
1	Description .....	1
2	Table of contents .....	2
3	Ordering data .....	3
4	Technical data .....	4
5	Illuminance distribution and luminous intensity distribution.....	6
6	Safety notes.....	7
7	Mount light .....	7
8	Connecting cables.....	8
	8.1 Power supply to a light .....	8
	8.2 Series connection .....	8
	8.3 Connection assignment.....	8
9	Connection example.....	9

### 3 Ordering data

Description	Type	Order No.	Pcs./Pkt.
LED machine light, 24 V DC, Degree of protection IP67, Emission angle 85 °/95 °, Color temperature 5000 K, Length 190 mm, Diameter 40 mm, M12 connector, Light housing: Anodized aluminum, Pane: Single-pane safety glass (ESG, thermally toughened float glass), pivoting, Resistant to coolants and lubricants, can be switched in series	PLD M 260 W-85/95 190/D40/SC	2702933	1

mandatory product	Type	Order No.	Pcs./Pkt.
 The PLD M-ME MC/D40 mounting holder (Order No. 2702491) or the PLD M-ME MB/D40 mounting bracket (Order No. 2702527) is required in order to mount the light.			

Mounting holder, AlMgSi0,5: Aluminum, for machine lights PLD M 260 .../D40, Swiveling range ±20°	PLD M-ME MC/D40	2702492	1
Mounting brackets, stainless, 2A (X5CrNi-18-10): Steel, for machine lights PLD M 260 .../D40, Swiveling range ±45°	PLD M-ME MB/D40	2702527	1


Accessories	Type	Order No.	Pcs./Pkt.
Sensor/Actuator cable, 4-position, PUR halogen-free, black-gray RAL 7021, free cable end, on Socket straight M12, A-coded, Cable length: 1.5 m	SAC-4P- 1,5-PUR/M12FS	1668108	1
Sensor/Actuator cable, 4-position, PUR halogen-free, black-gray RAL 7021, free cable end, on Socket straight M12, A-coded, Cable length: 3 m (Cable/conductor)	SAC-4P- 3,0-PUR/M12FS	1668111	1
Sensor/Actuator cable, 4-position, PUR halogen-free, black-gray RAL 7021, free cable end, on Socket straight M12, A-coded, Cable length: 5 m (Cable/conductor)	SAC-4P- 5,0-PUR/M12FS	1668124	1
Sensor/Actuator cable, 4-position, PUR halogen-free, black-gray RAL 7021, free cable end, on Socket angled M12, A-coded, Cable length: 1.5 m	SAC-4P- 1,5-PUR/M12FR	1668221	1
Sensor/Actuator cable, 4-position, PUR halogen-free, black-gray RAL 7021, free cable end, on Socket angled M12, A-coded, Cable length: 3 m	SAC-4P- 3,0-PUR/M12FR	1668234	1
Sensor/Actuator cable, 4-position, PUR halogen-free, black-gray RAL 7021, free cable end, on Socket angled M12, A-coded, Cable length: 5 m	SAC-4P- 5,0-PUR/M12FR	1668247	1



The cable accessories listed above include a selection of possible cables. When selecting the cable and the cable cross section, take the voltage drop on the cable into consideration. The maximum current carrying capacity of the cable depending on the ambient temperature must also be taken into consideration.

## 4 Technical data

### Dimensions (nominal sizes in mm)

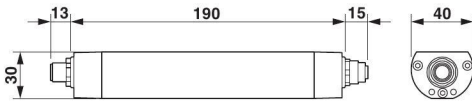

Length	190 mm
Diameter	40 mm
Width	40 mm
Height	30 mm
Note on dimensions	Length without M12 flush-type connector

### General data

Weight	0.3 kg
Color	aluminum color
Ambient temperature (operation)	0 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 75 °C
Permissible humidity (operation)	95 %
Permissible humidity (storage/transport)	95 % (non-condensing)
Air pressure (operation)	69 kPa ... 102 kPa
Air pressure (storage/transport)	69 kPa ... 102 kPa
Degree of protection	IP67
Protection class	III, IEC 61140, EN 61140, VDE 0140-1
Mounting position	any
Mounting type	Screw mounting (Mounting with mounting holders or mounting brackets, please observe the notes in the package slip.)
Material	Anodized aluminum (Light housing) Single-pane safety glass (ESG, thermally toughened float glass) (Pane)

### Special properties

pivoting (with mounting accessories)

Resistant to coolants and lubricants

can be switched in series

### Connection data

Connection method	M12 connector
Connection method	M12 connector, (A-coded)
Number of positions	4
Permissible conductor cross section	min. 0.34 mm <sup>2</sup>

**Power supply for module electronics**

Supply voltage	24 V DC
Supply voltage range	20 V DC ... 28 V DC
Current consumption	typ. 0.21 A (at 24 V DC)
Power consumption	approx. 5 W (at 24 V DC)
Surge protection	Varistor and suppressor diode, 36 V DC
Reverse polarity protection	Polarity protection diode

**Light properties**

Source of light type	LED
Number of LEDs	12
Service life, lighting appliance	60000 h (L70)
Light color	Neutral white
Color temperature	5000 K
Color rendering index	80
Luminous flux	approx. 480 lm (Net luminous flux)
Luminous efficacy	approx. 96 lm/W
Energy efficiency class	A+
Average illumination	156 lx (Distance of 1 m over 1 m <sup>2</sup> area)
Illumination	max. 216 lx (Distance of 1 m) min. 94 lx (Distance of 1 m over 1 m <sup>2</sup> area)
Emission angle	85 ° (C0-C180) / 95 ° (C90-C270)

**Mechanical tests**

Vibration resistance in acc. with EN 60068-2-6/ IEC 60068-2-6	4g
Shock in acc. with EN 60068-2-27/IEC 60068-2-27	50g

**Conformance with EMC Directive 2014/30/EU**

**Noise immunity test in accordance with EN 61547**

Electrostatic discharge (ESD) EN 61000-4-2/ IEC 61000-4-2	Criterion B, 4 kV contact discharge, 8 kV air discharge
Electromagnetic fields EN 61000-4-3/IEC 61000-4-3	Criterion A, field strength: 3 V/m
Fast transients (burst) EN 61000-4-4/IEC 61000-4-4	Criterion B, ±0.5 kV
Conducted interference EN 61000-4-6/IEC 61000-4-6	Criterion A, test voltage 3 V

**Noise emission test according to EN 61000-6-3**

Radio interference properties EN 55015	Class B
--	---------

**Approvals**

For the latest approvals, please visit [phoenixcontact.net/products](http://phoenixcontact.net/products).

## 5 Illuminance distribution and luminous intensity distribution

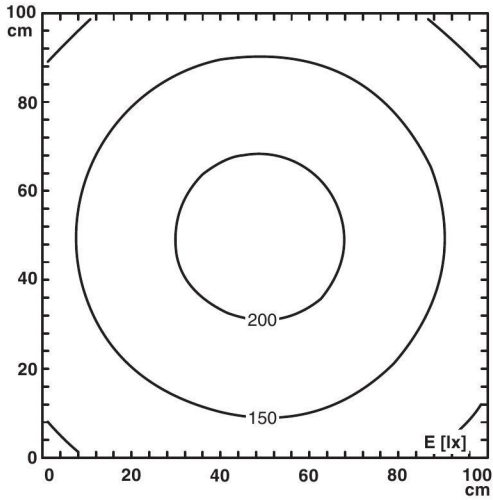


Figure 1 Illuminance distribution  
(Distance  $d = 1\text{ m}$ )

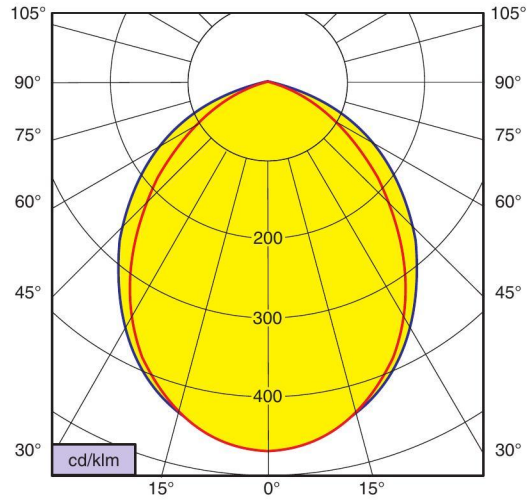


Figure 2 Luminous intensity distribution (LID)  
(red line: C0 - C180, blue line: C90 - C270)

## 6 Safety notes



**WARNING: Explosion hazard**

- Do not install and operate the light in potentially explosive spaces!



**WARNING: danger of electric shock**

- Electrical work may only be performed by qualified electricians.
- Perform all work on the light with it de-energized!



**CAUTION: Risk of glare due to bright light source**

Looking directly at the light source can lead to temporarily limited vision and after-images. This can lead to irritation, nuisances, adverse effects, and accidents.

- Do not look at the light source!
- Position the light so as to avoid looking directly into the light source!



**CAUTION: Risk of burns**

Hot surfaces can lead to burning of the skin.

- Do **not** touch the light during operation.
- Only touch the light once it has cooled down.



**NOTE: damage due to exposure to direct sunlight**

Exceeding the permissible ambient temperature shortens the service life of the electronic components.

- Do not expose the light to direct sunlight!



**CAUTION: Damage due to incident laser beam**

Being struck directly or indirectly by a laser beam can destroy the LED.

- Only use the light outside of the effective range of high-power lasers such as cutting lasers or welding lasers!

## 7 Mount light

Mounting holders and mounting brackets are available as mounting elements. These cannot be used in combination. Use either mounting holders or mounting brackets.

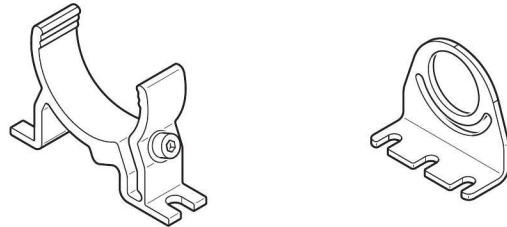


Figure 3 Mounting holder and mounting bracket



**CAUTION: risk of injury or material damage due to falling light**

Strong vibrations or impacts in particular can cause a vertically mounted light to slip and cause personal injury or material damage.

- Only use the mounting elements available as accessories!
- Vertical mounting: install additional mounting holders or use mounting brackets.

Mount the light as specified in the package slip.

## 8 Connecting cables



**CAUTION: Damage due to incorrect connection**

Incorrect connection voltage or faulty cables can lead to damage or destruction of the lights.

- Only connect the light when the operating unit is switched off!
- Only operate the light with safety extra-low voltage (SELV)!
- Ensure that the connection voltage corresponds to the nominal voltage given on the ratings plate!
- Observe the assignment of the input connector and the output socket!
- Observe the minimum cable cross sections. See "Technical data".
- Use a class 2 power supply unit when the light is used on the North American market!



**CAUTION: Damage due to penetrating humidity**

- Ensure the tightness of the cable feed!
- Use a plug connection that provides at least the IP67 degree of protection!
- Mount the connecting cable and the plug connection correctly!
- Avoid a transverse load on the plug connection!

### 8.1 Power supply to a light

Use the M12 socket of the cable with the A-coded M12 plug of the light.

The light does not have a switch. The light can be turned on or off by external switch elements or connectors.

### 8.2 Series connection



**NOTE: Electronics may be damaged when overloaded**

When connecting in series, ensure that the total power consumption 4 A is not exceeded!

To connect multiple lights in series, connect the preceding light via the output socket with the input connector of the subsequent light.

The number of lights in sequence depends on the type of the lights and the power supply unit used.

### 8.3 Connection assignment




Figure 4 Connection of the supply voltage of a light (input connector)




Figure 5 Forwarding of the supply voltage for the series connection of lights (output socket)

Pin	Assignment of the input connector and the output socket
1	24 V DC
2	Not used
3	GND
4	Not used



## 9 Connection example

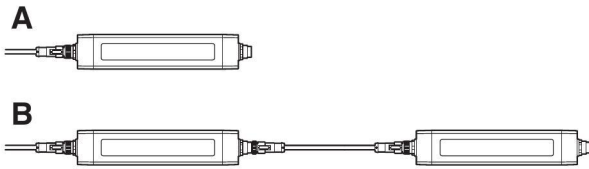


Figure 6 Connection example

- A Connection of a light
- B Series connection