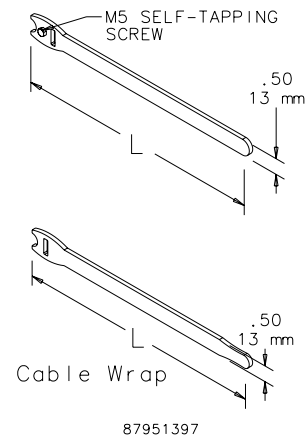


VELCRO® CABLE WRAP



Securely holds cable to cable manager and unfastens easily for cable maintenance. VELCRO® is 0.5-in. (12.7-mm) wide. Available in 8- and 12-in. (203- and 305-mm) lengths in both screw fastener and wrap styles. M5 self-tapping screw is used on Net Series or PROLINE™ frames.

VELCRO is a trademark of Velcro Industries B.V.

BULLETIN: DACCY



| Catalog Number | Description | L (in.) | L (mm) | Color | Pkg. Qty. |
|----------------|------------------------------------------------------|---------|--------|--------|-----------|
| ECWTD8B | Screw fastener style. Includes M5 mounting screw. | 8.00 | 203 | Black | 10 |
| ECWTD12B | Screw fastener style. Includes M5 mounting screw. | 12.00 | 305 | Black | 10 |
| ECW8B | Wrap style | 8.00 | 203 | Black | 10 |
| ECW8R | Wrap style | 8.00 | 203 | Red | 10 |
| ECW8BL | Wrap style | 8.00 | 203 | Blue | 10 |
| ECW8Y | Wrap style | 8.00 | 203 | Yellow | 10 |
| ECW12B | Wrap style | 12.00 | 305 | Black | 10 |
| ECW12R | Wrap style | 12.00 | 305 | Red | 10 |
| ECW12BL | Wrap style | 12 | 305 | Blue | 10 |
| ECW12Y | Wrap style | 12 | 305 | Yellow | 10 |

UL-RECOGNIZED HARDWARE KITS

INDUSTRY STANDARDS

UL 508A recognized components

CSA File No. 42186: Type 4, 4X, 12, 13

Cabinet maintains up to UL Type 4X when included hardware is used per instructions.

Standard Product

| Catalog Number | Fastener Size (Nominal) | Fastener Length (Dia. Inches) | Drill/Hole Size (Inches) |
|----------------|-------------------------|-------------------------------|--------------------------|
| AHK10324X | 10-32 | 5/8 | 7/32 |
| AHK14204X | 1/4-20 | 1 | 9/32 |
| AHK38164X | 3/8-16 | 1 | 13/32 |

APPLICATION

These UL-recognized mountings kits are designed to maintain the overall UL Type rating of the enclosure when component mounting holes penetrate the exterior of the enclosure. These hardware kits are conveniently offered in three common fastener sizes to meet various applications.

FEATURES

- Each kit provides the capability of sealing 10 hole penetrations
- Kits are offered in 10-32, 1/4-20 and 3/8-16 fastener sizes
- Stainless steel fasteners
- Kit contains screws, sealing washers and locking nuts
- Kit is UL-recognized as a means to maintain UL enclosure cabinet rating up to Type 4X

SPECIFICATIONS

- Fasteners are made of stainless steel
- Sealing washer has integral rubber sealing and stainless steel washer

FINISH

Brushed, bright stainless steel

BULLETIN: A80HS

TAMPER-RESISTANT SCREWS



Designed for field installation on screw cover pull boxes and screw cover Type 3R enclosures (size 16.00 x 12.00 x 6.00 in. or smaller), consolets, pushbutton enclosures and Type 12 screw cover wiring trough. Each package consists of four Type 18-8 stainless steel screws and four nylon captivating washers. Driver bit must be ordered separately (functions in any handle or socket capable of holding 1/4-in. hex insert bits).

BULLETIN: A80

| Catalog Number | Description | Pkg. Qty. |
|----------------|--------------------------------|-----------|
| ATRSK | Tamper-resistant screw (10-32) | 4 |
| ATRS DVR | Driver bit | 1 |

SCREW PACKAGES



Screw Packages are for mounting rack panels and equipment to rack angles.

BULLETIN: A80, DACCY, X20

| Catalog Number | Color | Description | Pkg. Qty. |
|----------------|--------|----------------------------------------------------|-----------|
| ES1224 | Silver | 12-24 x 5/8 in. combo head | 20 |
| ES1224250 | Silver | 12-24 x 5/8 in. combo head | 250 |
| ES1224B | Black | 12-24 x 5/8 in. combo head | 20 |
| ES1224B250 | Black | 12-24 x 5/8 in. combo head | 250 |
| ASM5 | Silver | M5 x 20 mm Combo Head | 20 |
| ASM6 | Silver | M6 x 16 mm combo head | 20 |
| ASM5T | Silver | M5 x 12 mm thread-forming Phillips hex head screws | 20 |
| ASM6250 | Silver | M6 x 16 mm combo head | 250 |
| AS1032 | Silver | 10-32 x 5/8 in. combo head | 20 |
| AS1032250 | Silver | 10-32 x 5/8 in. combo head | 250 |
| AS1032B | Black | 10-32 x 5/8 in. combo head | 20 |

Use ASM5T on PROLINE™ frame or Net Series extruded holes.

CAGE NUT PACKAGE



Cage Nut Packages are for use with square-hole rack angles. Cage nuts are plated steel.

BULLETIN: DACCY, P20

| Catalog Number | Color | Description | Pkg. Qty. |
|----------------|--------|----------------|-----------|
| PM5CN | Silver | M5 cage nut | 20 |
| PM6CN | Silver | M6 cage nut | 20 |
| PM6CN250 | Silver | M6 cage nut | 250 |
| P1032CN | Silver | 10-32 cage nut | 20 |
| P1032CN250 | Silver | 10-32 cage nut | 250 |
| P1224CN | Silver | 12-24 cage nut | 20 |
| P1224CN250 | Silver | 12-24 cage nut | 250 |

CLIP NUT PACKAGE



Twenty plated clip nuts fit all rack-mounting angles with .281-in. (7-mm) diameter holes (through-hole type).

BULLETIN: A80, X20

| Catalog Number | Description | Pkg. Qty. | Fits |
|----------------|----------------------|-----------|------------------------------|
| AN1032 | Clip Nut 10-32 | 20 | .281-diameter mounting holes |
| ANM5 | Clip Nut M5 (Metric) | 20 | .281-diameter mounting holes |

CLAMPING NUT PACKAGE



Twenty plated clamping nuts with top-grip nut retainers. Clamping nuts fit into mounting channels that are used on inside walls of Hoffman enclosures. Clamping nuts are included with all Hoffman accessories that attach to mounting channels. These clamping nuts can be used for mounting other equipment (brackets, etc.) to the enclosure walls.

BULLETIN: A80

| Catalog Number | Description | Thread |
|----------------|---------------|---------|
| APS1032CN | Package of 20 | 10-32 |
| APS1420CN | Package of 20 | 1/4-20 |
| APS51618CN | Package of 20 | 5/16-18 |

PROLINE™ FASTENER PACKAGES


Use to fasten components to the grid system. PGF Packages include 20 front-loading clip nuts (M6) and 20 combination-drive washer-head bolts (M6).

Grounding Package is used with the rectangular holes in the PROLINE™ frame to provide electrical continuity between the frame and the grid system. ASM5T Package is used with PROLINE frames having round holes. Package includes 20 M5 self-tapping screws.

BULLETIN: DACCY, P20

| Catalog Number | Description | Use in | Pkg. Qty. |
|----------------|------------------------------------------------------|-------------------|-----------|
| ASM5T | M5 x 12 mm thread-forming Phillips hex head screws | Round holes | 20 |
| PGFM6 | Standard Package - M6 cage nuts and bolts | Rectangular holes | 20 |
| PGFGM6 | Grounding Package - M6 grounding cage nuts and bolts | Tapped holes | 20 |

FASTENER PACKAGE


Kit includes a set of 8 cage nuts and screws. Used to mount 19-in. rack equipment to 9-mm square holes in uprights. Cage nuts are metric (M6). Screws are pan head Phillips metric M6x16.

BULLETIN: DACCY, DEC1

| Catalog Number | Color | Description |
|----------------|--------|--------------------------------------------------|
| ECNSM6 | Silver | M6 x 16 pan head posidrive screws. M6 cage nuts. |

Notes