

**CLEAN TRAY STAINLESS STEEL CABLE TRAY, TYPE 1**



**INDUSTRY STANDARDS**

UL Classified; File No. E263414  
 This product is classified as to its suitability as an equipment grounding conductor only.

NEMA/EEMAC Type 1

**APPLICATION**

The Clean Tray Stainless Steel Cable Tray is designed to protect rated cabling in applications that require frequent washdown. A variety of sloped-top fittings with front, inside or outside cover options allows for highly-customized runs using standard catalog product and supports directional control of washdown effluence.

**FEATURES**


- Adjustable dividers
- Tops and sides can completely open
- Flat cover and 20-degree sloped cover models available
- Perforated fittings and straight sections
- Elbows contain three cover options: front, inside and outside
- Connecting hardware is included with each model
- Quarter-turn latches

**SPECIFICATIONS**

- 18 gauge stainless steel

**FINISH**

Smooth brushed finish

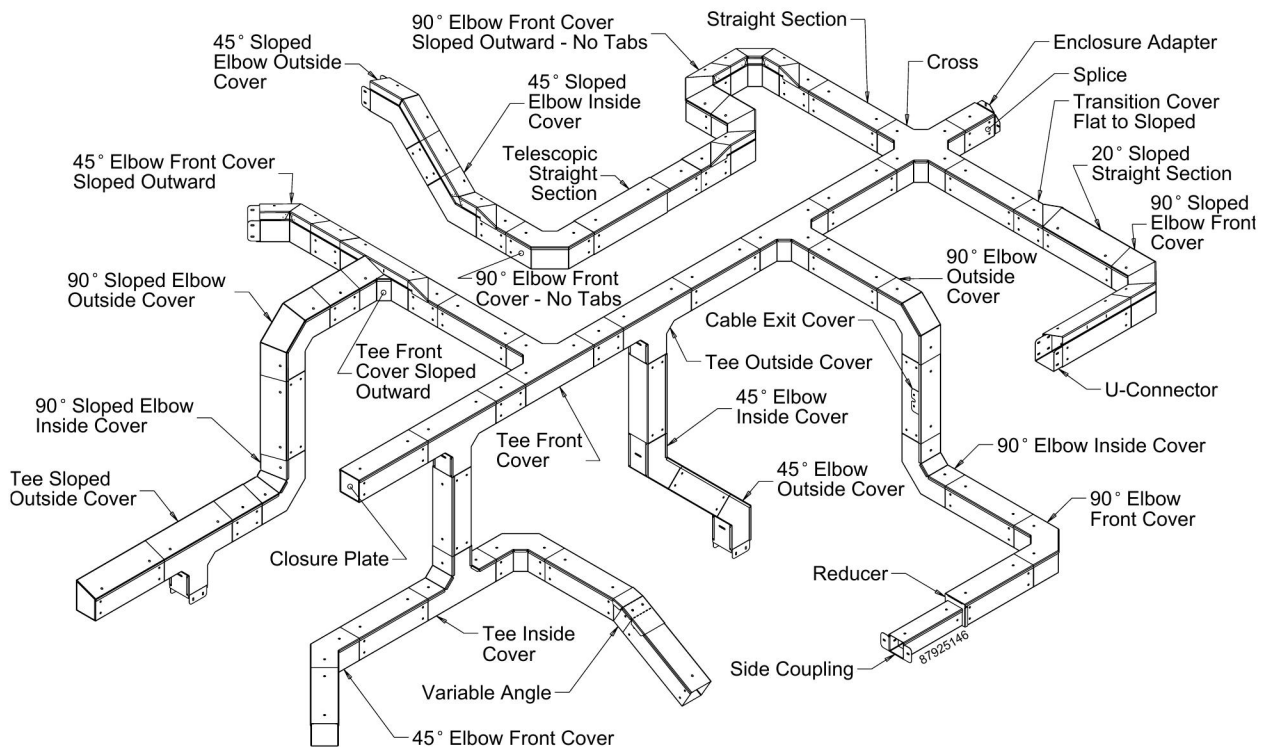


### STRAIGHT SECTION



Straight sections are available in 10-ft. lengths with or without perforations. Available with a 20-degree sloped cover in some sizes. One U-connector and hardware is supplied with each straight section.

BULLETIN: F23

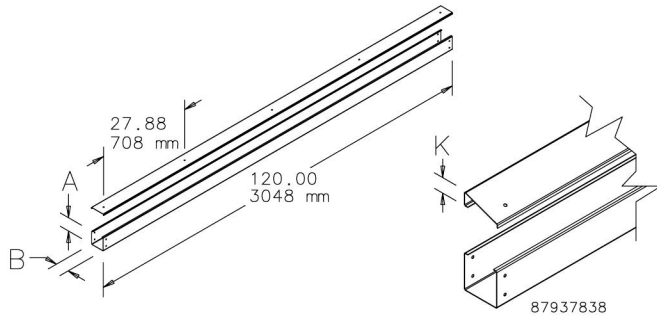


| Catalog Number | AxBxC in./mm                             | Description           | K in./mm   |
|----------------|--|-----------------------|------------|
| CT22120SS      | 2.00 x 2.00 x 120.00<br>51 x 51 x 3048   | Standard              | —          |
| CT33120SS      | 3.00 x 3.00 x 120.00<br>76 x 76 x 3048   | Standard              | —          |
| CT44120SS      | 4.00 x 4.00 x 120.00<br>102 x 102 x 3048 | Standard              | —          |
| CT46120SS      | 4.00 x 6.00 x 120.00<br>102 x 152 x 3048 | Standard              | —          |
| CT66120SS      | 6.00 x 6.00 x 120.00<br>152 x 152 x 3048 | Standard              | —          |
| CT22P120SS     | 2.00 x 2.00 x 120.00<br>51 x 51 x 3048   | Perforated            | —          |
| CT33P120SS     | 3.00 x 3.00 x 120.00<br>76 x 76 x 3048   | Perforated            | —          |
| CT44P120SS     | 4.00 x 4.00 x 120.00<br>102 x 102 x 3048 | Perforated            | —          |
| CT46P120SS     | 4.00 x 6.00 x 120.00<br>102 x 152 x 3048 | Perforated            | —          |
| CT66P120SS     | 6.00 x 6.00 x 120.00<br>152 x 152 x 3048 | Perforated            | —          |
| CTS33120SS     | 3.00 x 3.00 x 120.00<br>76 x 76 x 3048   | Sloped Top            | 1.06<br>24 |
| CTS44120SS     | 4.00 x 4.00 x 120.00<br>102 x 102 x 3048 | Sloped Top            | 1.42<br>36 |
| CTS46120SS     | 4.00 x 6.00 x 120.00<br>102 x 152 x 3048 | Sloped Top            | 2.16<br>55 |
| CTS66120SS     | 6.00 x 6.00 x 120.00<br>152 x 152 x 3048 | Sloped Top            | 2.16<br>55 |
| CTS33P120SS    | 3.00 x 3.00 x 120.00<br>76 x 76 x 3048   | Sloped Top Perforated | 1.06<br>27 |
| CTS44P120SS    | 4.00 x 4.00 x 120.00<br>102 x 102 x 3048 | Sloped Top Perforated | 1.42<br>36 |
| CTS46P120SS    | 4.00 x 6.00 x 120.00<br>102 x 152 x 3048 | Sloped Top Perforated | 2.16<br>55 |
| CTS66P120SS    | 6.00 x 6.00 x 120.00<br>152 x 152 x 3048 | Sloped Top Perforated | 2.16<br>55 |

### DIVIDER STRAIGHT SECTION

Used to divide one straight section into two sections.

BULLETIN: F23

| Catalog Number | H in./mm    | L in./mm    | Fits Cable Tray Size in./mm                      |
|----------------|-------------|-------------|--|
| CT33DSS        | 2.13<br>54  | 120<br>3048 | 3.00 x 3.00<br>76 x 76                           |
| CT44DSS        | 3.13<br>79  | 120<br>3048 | 4.00 x 4.00, 4.00 x 6.00<br>102 x 102, 102 x 152 |
| CT66DSS        | 5.13<br>130 | 120<br>3048 | 6.00 x 6.00<br>152 x 152                         |

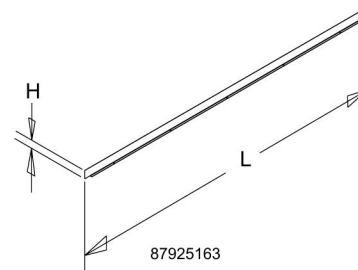


### TELESCOPIC STRAIGHT SECTION



Adjusts from 18.74 in. to 30.61 in.

BULLETIN: F23

| Catalog Number | AxB in.     | AxB mm    |
|----------------|-------------|-----------|
| CT22TSS        | 2.00 x 2.00 | 51 x 51   |
| CT33TSS        | 3.00 x 3.00 | 76 x 76   |
| CT44TSS        | 4.00 x 4.00 | 102 x 102 |
| CT46TSS        | 4.00 x 6.00 | 102 x 152 |
| CT66TSS        | 6.00 x 6.00 | 152 x 152 |

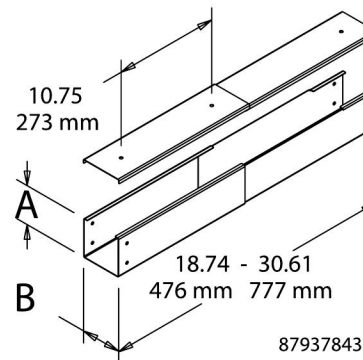

### DIVIDER, TELESCOPIC STRAIGHT SECTION

Must be trimmed to length.


BULLETIN: F23

| Catalog Number | AxB in.     | AxB mm    |
|----------------|-------------|-----------|
| CT33TDSPPSS    | 3.00 x 3.00 | 76 x 76   |
| CT44TDSPPSS    | 4.00 x 4.00 | 102 x 102 |
| CT66TDSPPSS    | 6.00 x 6.00 | 152 x 152 |

### 90-DEGREE ELBOWS



### BULLETIN: F23

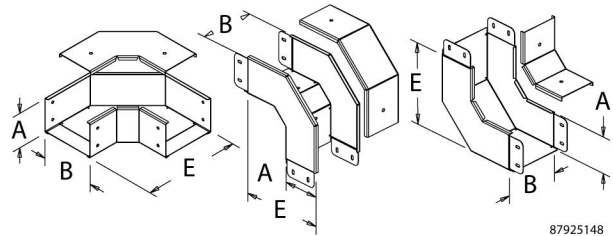

87925148

Used wherever a 90-degree transition is required. Models without tabs connect directly to another elbow without using a splice.


| Catalog Number | AxB in.     | AxB mm    | Description            | E (in.) | E (mm) | K (in.) | K (mm) |
|----------------|-------------|-----------|------------------------|---------|--------|---------|--------|
| CT22EFC90SS    | 2.00 x 2.00 | 51 x 51   | Top Cover              | 6.00    | 152    | —       | —      |
| CT33EFC90SS    | 3.00 x 3.00 | 76 x 76   | Top Cover              | 7.00    | 178    | —       | —      |
| CT44EFC90SS    | 4.00 x 4.00 | 102 x 102 | Top Cover              | 9.00    | 229    | —       | —      |
| CT46EFC90SS    | 4.00 x 6.00 | 102 x 152 | Top Cover              | 11.00   | 279    | —       | —      |
| CT66EFC90SS    | 6.00 x 6.00 | 152 x 152 | Top Cover              | 11.00   | 279    | —       | —      |
| CT22EFCNT90SS  | 2.00 x 2.00 | 51 x 51   | Top Cover without Tabs | 6.00    | 152    | —       | —      |
| CT33EFCNT90SS  | 3.00 x 3.00 | 76 x 76   | Top Cover without Tabs | 7.00    | 178    | —       | —      |
| CT44EFCNT90SS  | 4.00 x 4.00 | 102 x 102 | Top Cover without Tabs | 9.00    | 229    | 1.42    | 36     |
| CT46EFCNT90SS  | 4.00 x 6.00 | 102 x 152 | Top Cover without Tabs | 11.00   | 279    | 2.16    | 55     |
| CT66EFCNT90SS  | 6.00 x 6.00 | 152 x 152 | Top Cover without Tabs | 11.00   | 279    | 2.16    | 55     |
| CT22EIC90SS    | 2.00 x 2.00 | 51 x 51   | Inside Cover           | 6.00    | 152    | —       | —      |
| CT33EIC90SS    | 3.00 x 3.00 | 76 x 76   | Inside Cover           | 7.00    | 178    | —       | —      |
| CT44EIC90SS    | 4.00 x 4.00 | 102 x 102 | Inside Cover           | 9.00    | 229    | —       | —      |
| CT46EIC90SS    | 4.00 x 6.00 | 102 x 152 | Inside Cover           | 11.00   | 279    | —       | —      |
| CT66EIC90SS    | 6.00 x 6.00 | 152 x 152 | Inside Cover           | 11.00   | 279    | —       | —      |
| CT22EOC90SS    | 2.00 x 2.00 | 51 x 51   | Outside Cover          | 6.00    | 152    | —       | —      |
| CT33EOC90SS    | 3.00 x 3.00 | 76 x 76   | Outside Cover          | 7.00    | 178    | —       | —      |
| CT44EOC90SS    | 4.00 x 4.00 | 102 x 102 | Outside Cover          | 9.00    | 229    | —       | —      |
| CT46EOC90SS    | 4.00 x 6.00 | 102 x 152 | Outside Cover          | 11.00   | 279    | —       | —      |
| CT66EOC90SS    | 6.00 x 6.00 | 152 x 152 | Outside Cover          | 11.00   | 279    | —       | —      |
| CT22PEFC90SS   | 2.00 x 2.00 | 51 x 51   | Top Cover Perforated   | 6.00    | 152    | —       | —      |
| CT33PEFC90SS   | 3.00 x 3.00 | 76 x 76   | Top Cover Perforated   | 7.00    | 178    | —       | —      |
| CT44PEFC90SS   | 4.00 x 4.00 | 102 x 102 | Top Cover Perforated   | 9.00    | 229    | —       | —      |
| CT46PEFC90SS   | 4.00 x 6.00 | 102 x 152 | Top Cover Perforated   | 11.00   | 279    | —       | —      |
| CT66PEFC90SS   | 6.00 x 6.00 | 152 x 152 | Top Cover Perforated   | 11.00   | 279    | —       | —      |

### 90-DEGREE ELBOWS—TOP COVER SLOPED INWARD



Used wherever a 90-degree transition is required. Models without tabs connect directly to another elbow without using a splice.

### BULLETIN: F23



89168777


| Catalog Number | AxB in.     | AxB mm    | Description                        | E (in.) | E (mm) | K (in.) | K (mm) |
|----------------|-------------|-----------|------------------------------------|---------|--------|---------|--------|
| CTS33EFC90SS   | 3.00 x 3.00 | 76 x 76   | Top Cover Sloped Inward            | 7.00    | 178    | 1.06    | 27     |
| CTS44EFC90SS   | 4.00 x 4.00 | 102 x 102 | Top Cover Sloped Inward            | 9.00    | 229    | 1.42    | 36     |
| CTS46EFC90SS   | 4.00 x 6.00 | 102 x 152 | Top Cover Sloped Inward            | 11.00   | 279    | 2.16    | 55     |
| CTS66EFC90SS   | 6.00 x 6.00 | 152 x 152 | Top Cover Sloped Inward            | 11.00   | 279    | 2.16    | 55     |
| CTS33PEFC90SS  | 3.00 x 3.00 | 76 x 76   | Top Cover Sloped Inward Perforated | 7.00    | 178    | 1.06    | 27     |
| CTS44PEFC90SS  | 4.00 x 4.00 | 102 x 102 | Top Cover Sloped Inward Perforated | 9.00    | 229    | 1.42    | 36     |
| CTS46PEFC90SS  | 4.00 x 6.00 | 102 x 152 | Top Cover Sloped Inward Perforated | 11.00   | 279    | 2.16    | 55     |
| CTS66PEFC90SS  | 6.00 x 6.00 | 152 x 152 | Top Cover Sloped Inward Perforated | 11.00   | 279    | 2.16    | 55     |

**90-DEGREE ELBOWS—PERFORATED WITHOUT TABS**



Used wherever a 90-degree transition is required.  
BULLETIN: F23

| Catalog Number | AxB in.     | AxB mm    | E (in.) | E (mm) |
|----------------|-------------|-----------|---------|--------|
| CT22PEFCNT90SS | 2.00 x 2.00 | 51 x 51   | 6.00    | 152    |
| CT33PEFCNT90SS | 3.00 x 3.00 | 76 x 76   | 7.00    | 178    |
| CT44PEFCNT90SS | 4.00 x 4.00 | 102 x 102 | 9.00    | 229    |
| CT46PEFCNT90SS | 4.00 x 6.00 | 102 x 152 | 11.00   | 279    |
| CT66PEFCNT90SS | 6.00 x 6.00 | 152 x 152 | 11.00   | 279    |

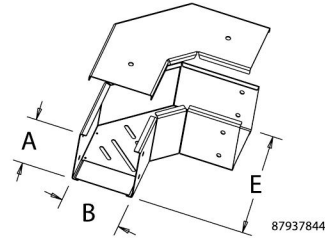


**90-DEGREE ELBOWS—TOP COVER SLOPED INWARD WITHOUT TABS**



Used wherever a 90-degree transition is required.  
BULLETIN: F23

| Catalog Number | AxB in./mm  | E in./mm | K in./mm |
|----------------|-------------|----------|----------|
| CTS44EFCNT90SS | 4.00 x 4.00 | 9.00     | 1.42     |
|                | 102 x 102   | 229      | 36       |
| CTS46EFCNT90SS | 4.00 x 6.00 | 11.00    | 2.16     |
|                | 102 x 152   | 279      | 55       |
| CTS66EFCNT90SS | 6.00 x 6.00 | 11.00    | 2.16     |
|                | 152 x 152   | 279      | 55       |

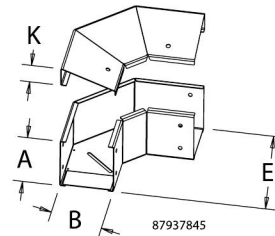


**90-DEGREE ELBOWS—TOP COVER SLOPED OUTWARD WITH TABS**



Used wherever a 90-degree transition is required.  
BULLETIN: F23

| Catalog Number | AxB in./mm  | E in./mm | K in./mm |
|----------------|-------------|----------|----------|
| CTS44EFCO90SS  | 4.00 x 4.00 | 9.00     | 1.42     |
|                | 102 x 102   | 229      | 36       |
| CTS46EFCO90SS  | 4.00 x 6.00 | 11.00    | 2.16     |
|                | 102 x 152   | 279      | 55       |
| CTS66EFCO90SS  | 6.00 x 6.00 | 11.00    | 2.16     |
|                | 152 x 152   | 279      | 55       |

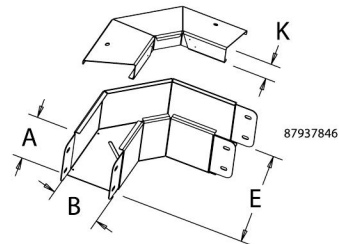


**90-DEGREE ELBOWS—TOP COVER SLOPED OUTWARD WITHOUT TABS**



Used wherever a 90-degree transition is required.  
BULLETIN: F23

| Catalog Number  | AxB in./mm  | E in./mm | K in./mm |
|-----------------|-------------|----------|----------|
| CTS44EFCONT90SS | 4.00 x 4.00 | 9.00     | 1.42     |
|                 | 102 x 102   | 229      | 36       |
| CTS46EFCONT90SS | 4.00 x 6.00 | 11.00    | 2.16     |
|                 | 102 x 152   | 279      | 55       |
| CTS66EFCONT90SS | 6.00 x 6.00 | 11.00    | 2.16     |
|                 | 152 x 152   | 279      | 55       |

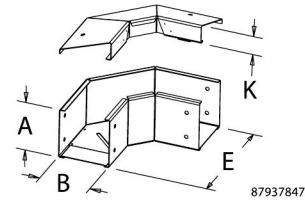


**90-DEGREE ELBOWS—INSIDE COVER SLOPED**



Used wherever a 90-degree transition is required.  
BULLETIN: F23


| Catalog Number | AxB in./mm  | E in./mm | K in./mm |
|----------------|-------------|----------|----------|
| CTS44EIC90SS   | 4.00 x 4.00 | 9.00     | 1.42     |
|                | 102 x 102   | 229      | 36       |
| CTS46EIC90SS   | 4.00 x 6.00 | 11.00    | 2.16     |
|                | 102 x 152   | 279      | 55       |
| CTS66EIC90SS   | 6.00 x 6.00 | 11.00    | 2.16     |
|                | 152 x 152   | 279      | 55       |

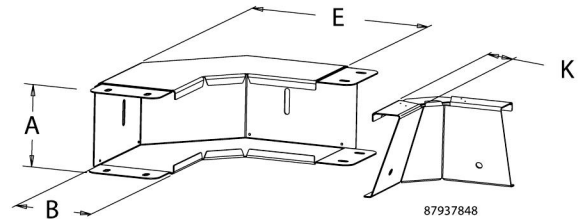

**90-DEGREE ELBOWS—OUTSIDE COVER SLOPED**




Used wherever a 90-degree transition is required.  
BULLETIN: F23

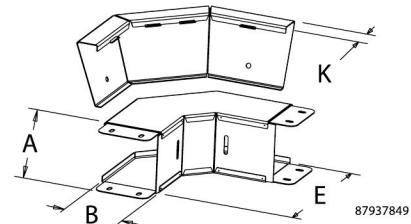

| Catalog Number | AxB in./mm  | E in./mm | K in./mm |
|----------------|-------------|----------|----------|
| CTS44EOC90SS   | 4.00 x 4.00 | 9.00     | 1.42     |
|                | 102 x 102   | 229      | 36       |
| CTS46EOC90SS   | 4.00 x 6.00 | 11.00    | 2.16     |
|                | 102 x 152   | 279      | 55       |
| CTS66EOC90SS   | 6.00 x 6.00 | 11.00    | 2.16     |
|                | 152 x 152   | 279      | 55       |

**45-DEGREE ELBOWS**

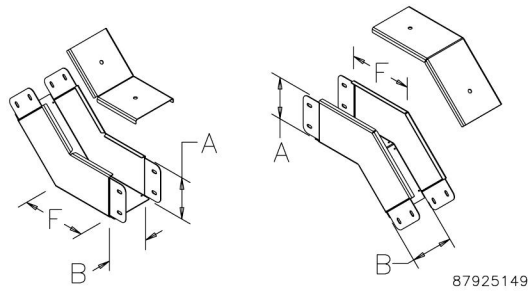


Used wherever a 45-degree transition is required.

**BULLETIN: F23**

| Catalog Number | AxB in.     | AxB mm    | Description          | F (in.) | F (mm) |
|----------------|-------------|-----------|----------------------|---------|--------|
| CT22EFC45SS    | 2.00 x 2.00 | 51 x 51   | Top Cover            | 4.57    | 116    |
| CT33EFC45SS    | 3.00 x 3.00 | 76 x 76   | Top Cover            | 4.98    | 127    |
| CT44EFC45SS    | 4.00 x 4.00 | 102 x 102 | Top Cover            | 5.96    | 151    |
| CT46EFC45SS    | 4.00 x 6.00 | 102 x 152 | Top Cover            | 6.79    | 173    |
| CT66EFC45SS    | 6.00 x 6.00 | 152 x 152 | Top Cover            | 6.79    | 173    |
| CT22EIC45SS    | 2.00 x 2.00 | 51 x 51   | Inside Cover         | 4.57    | 116    |
| CT33EIC45SS    | 3.00 x 3.00 | 76 x 76   | Inside Cover         | 4.98    | 127    |
| CT44EIC45SS    | 4.00 x 4.00 | 102 x 102 | Inside Cover         | 5.96    | 151    |
| CT46EIC45SS    | 4.00 x 6.00 | 102 x 152 | Inside Cover         | 6.79    | 173    |
| CT66EIC45SS    | 6.00 x 6.00 | 152 x 152 | Inside Cover         | 6.79    | 173    |
| CT22EOC45SS    | 2.00 x 2.00 | 51 x 51   | Outside Cover        | 4.57    | 116    |
| CT33EOC45SS    | 3.00 x 3.00 | 76 x 76   | Outside Cover        | 4.98    | 127    |
| CT44EOC45SS    | 4.00 x 4.00 | 102 x 102 | Outside Cover        | 5.96    | 151    |
| CT46EOC45SS    | 4.00 x 6.00 | 102 x 152 | Outside Cover        | 6.79    | 173    |
| CT66EOC45SS    | 6.00 x 6.00 | 152 x 152 | Outside Cover        | 6.79    | 173    |
| CT22PEFC45SS   | 2.00 x 2.00 | 51 x 51   | Top Cover Perforated | 4.57    | 116    |
| CT33PEFC45SS   | 3.00 x 3.00 | 76 x 76   | Top Cover Perforated | 4.98    | 127    |
| CT44PEFC45SS   | 4.00 x 4.00 | 102 x 102 | Top Cover Perforated | 5.96    | 151    |
| CT46PEFC45SS   | 4.00 x 6.00 | 102 x 152 | Top Cover Perforated | 6.79    | 173    |
| CT66PEFC45SS   | 6.00 x 6.00 | 152 x 152 | Top Cover Perforated | 6.79    | 173    |

**45-DEGREE ELBOWS—TOP COVER SLOPED INWARD**

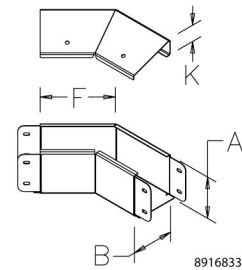

Used wherever a 45-degree transition is required.

**BULLETIN: F23**


| Catalog Number | AxB in.     | AxB mm    | Description                        | F (in.) | F (mm) | K (in.) | K (mm) |
|----------------|-------------|-----------|------------------------------------|---------|--------|---------|--------|
| CTS33EFC45SS   | 3.00 x 3.00 | 76 x 76   | Top Cover Sloped Inward            | 4.98    | 127    | 1.06    | 27     |
| CTS44EFC45SS   | 4.00 x 4.00 | 102 x 102 | Top Cover Sloped Inward            | 5.96    | 151    | 1.42    | 36     |
| CTS46EFC45SS   | 4.00 x 6.00 | 102 x 152 | Top Cover Sloped Inward            | 6.79    | 173    | 2.16    | 55     |
| CTS66EFC45SS   | 6.00 x 6.00 | 152 x 152 | Top Cover Sloped Inward            | 6.79    | 173    | 2.16    | 55     |
| CTS33PEFC45SS  | 3.00 x 3.00 | 76 x 76   | Top Cover Sloped Inward Perforated | 4.98    | 127    | 1.06    | 27     |
| CTS44PEFC45SS  | 4.00 x 4.00 | 102 x 102 | Top Cover Sloped Inward Perforated | 5.96    | 151    | 1.42    | 36     |
| CTS46PEFC45SS  | 4.00 x 6.00 | 102 x 152 | Top Cover Sloped Inward Perforated | 6.79    | 173    | 2.16    | 55     |
| CTS66PEFC45SS  | 6.00 x 6.00 | 152 x 152 | Top Cover Sloped Inward Perforated | 6.79    | 173    | 2.16    | 55     |

**45-DEGREE ELBOWS—TOP COVER SLOPED OUTWARD**



Used wherever a 45-degree transition is required.  
BULLETIN: F23

| Catalog Number | AxB in./mm               | F in./mm    | K in./mm   |
|----------------|--------------------------|-------------|------------|
| CTS44EFCO45SS  | 4.00 x 4.00<br>102 x 102 | 5.96<br>151 | 1.42<br>36 |
| CTS46EFCO45SS  | 4.00 x 6.00<br>102 x 152 | 6.79<br>173 | 2.16<br>55 |
| CTS66EFCO45SS  | 6.00 x 6.00<br>152 x 152 | 6.79<br>173 | 2.16<br>55 |




**45-DEGREE ELBOWS—INSIDE COVER SLOPED**



Used wherever a 45-degree transition is required.  
BULLETIN: F23

| Catalog Number | AxB in./mm               | F in./mm    | K in./mm   |
|----------------|--------------------------|-------------|------------|
| CTS66EIC45SS   | 6.00 x 6.00<br>152 x 152 | 6.79<br>173 | 2.16<br>55 |

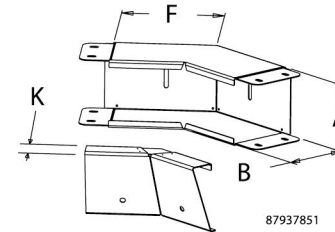


| Catalog Number | AxB in./mm               | F in./mm    | K in./mm   |
|----------------|--------------------------|-------------|------------|
| CTS44EIC45SS   | 4.00 x 4.00<br>102 x 102 | 5.96<br>151 | 1.42<br>36 |
| CTS46EIC45SS   | 4.00 x 6.00<br>102 x 152 | 6.79<br>173 | 2.16<br>55 |

**45-DEGREE ELBOWS—OUTSIDE COVER SLOPED**



Used wherever a 45-degree transition is required.  
BULLETIN: F23

| Catalog Number | AxB in./mm               | F in./mm    | K in./mm   |
|----------------|--------------------------|-------------|------------|
| CTS44EOC45SS   | 4.00 x 4.00<br>102 x 102 | 5.96<br>151 | 1.42<br>36 |
| CTS46EOC45SS   | 4.00 x 6.00<br>102 x 152 | 6.79<br>173 | 2.16<br>55 |
| CTS66EOC45SS   | 6.00 x 6.00<br>152 x 152 | 6.79<br>173 | 2.16<br>55 |

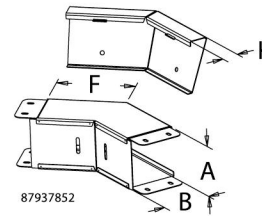


### VARIABLE-ANGLE ELBOW FITTING



Adjustable from 0 to 90 degrees. Simplifies and saves field integration and installation time.

BULLETIN: F23

| Catalog Number | AxB in.     | AxB mm    |
|----------------|-------------|-----------|
| CT22VSS        | 2.00 x 2.00 | 51 x 51   |
| CT33VSS        | 3.00 x 3.00 | 76 x 76   |
| CT44VSS        | 4.00 x 4.00 | 102 x 102 |
| CT46VSS        | 4.00 x 6.00 | 102 x 152 |
| CT66VSS        | 6.00 x 6.00 | 152 x 152 |

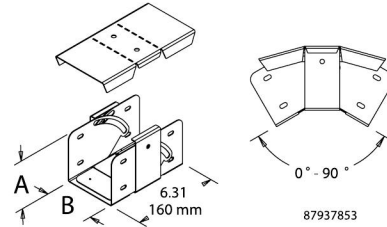


### 90-DEGREE TEE



Available with or without perforations in three cover options: top, inside and outside. Used wherever two 90-degree transitions are required.

BULLETIN: F23

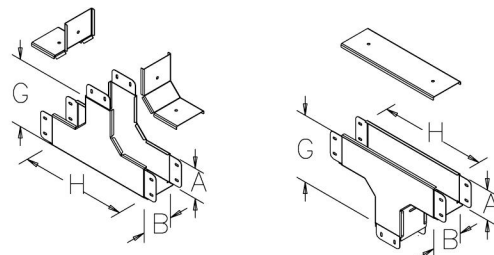


87925153

| Catalog Number | AxB in.     | AxB mm    | Description          | G (in.) | G (mm) | H (in.) | H (mm) |
|----------------|-------------|-----------|----------------------|---------|--------|---------|--------|
| CT22TFCSS      | 2.00 x 2.00 | 51 x 51   | Top Cover            | 3.00    | 152    | 10.00   | 254    |
| CT33TFCSS      | 3.00 x 3.00 | 76 x 76   | Top Cover            | 9.00    | 229    | 14.00   | 356    |
| CT44TFCSS      | 4.00 x 4.00 | 102 x 102 | Top Cover            | 7.00    | 178    | 11.00   | 279    |
| CT46TFCSS      | 4.00 x 6.00 | 102 x 152 | Top Cover            | 11.00   | 279    | 16.00   | 406    |
| CT66TFCSS      | 6.00 x 6.00 | 152 x 152 | Top Cover            | 11.00   | 279    | 16.00   | 406    |
| CT33TICSS      | 3.00 x 3.00 | 76 x 76   | Inside Cover         | 7.00    | 178    | 11.00   | 279    |
| CT44TICSS      | 4.00 x 4.00 | 102 x 102 | Inside Cover         | 9.00    | 229    | 14.00   | 356    |
| CT46TICSS      | 4.00 x 6.00 | 102 x 152 | Inside Cover         | 11.00   | 279    | 16.00   | 406    |
| CT66TICSS      | 6.00 x 6.00 | 152 x 152 | Inside Cover         | 11.00   | 279    | 16.00   | 406    |
| CT22TOCSS      | 2.00 x 2.00 | 51 x 51   | Outside Cover        | 6.00    | 152    | 10.00   | 254    |
| CT33TOCSS      | 3.00 x 3.00 | 76 x 76   | Outside Cover        | 7.00    | 178    | 11.00   | 279    |
| CT44TOCSS      | 4.00 x 4.00 | 102 x 102 | Outside Cover        | 9.00    | 229    | 14.00   | 356    |
| CT46TOCSS      | 4.00 x 6.00 | 102 x 152 | Outside Cover        | 11.00   | 279    | 16.00   | 406    |
| CT66TOCSS      | 6.00 x 6.00 | 152 x 152 | Outside Cover        | 11.00   | 279    | 16.00   | 406    |
| CT22PTFCSS     | 2.00 x 2.00 | 51 x 51   | Top Cover Perforated | 6.00    | 152    | 10.00   | 254    |
| CT33PTFCSS     | 3.00 x 3.00 | 76 x 76   | Top Cover Perforated | 7.00    | 178    | 11.00   | 279    |
| CT44PTFCSS     | 4.00 x 4.00 | 102 x 102 | Top Cover Perforated | 9.00    | 229    | 14.00   | 356    |
| CT46PTFCSS     | 4.00 x 6.00 | 102 x 152 | Top Cover Perforated | 11.00   | 279    | 16.00   | 406    |
| CT66PTFCSS     | 6.00 x 6.00 | 152 x 152 | Top Cover Perforated | 11.00   | 279    | 16.00   | 406    |



### 90-DEGREE TEE-TOP COVER SLOPED INWARD

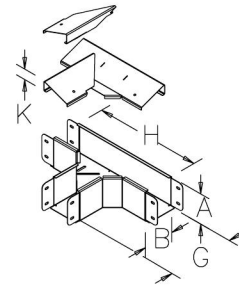

89168943

BULLETIN: F23

| Catalog Number | AxB in.     | AxB mm    | Description                 | G (in.) | G (mm) | H (in.) | H (mm) | K (in.) | K (mm) |
|----------------|-------------|-----------|-----------------------------|---------|--------|---------|--------|---------|--------|
| CTS33TFCSS     | 3.00 x 3.00 | 76 x 76   | Top Cover Sloped            | 7.00    | 178    | 11.00   | 279    | 1.06    | 27     |
| CTS44TFCSS     | 4.00 x 4.00 | 102 x 102 | Top Cover Sloped            | 9.00    | 229    | 14.00   | 356    | 1.42    | 36     |
| CTS46TFCSS     | 4.00 x 6.00 | 102 x 152 | Top Cover Sloped            | 11.00   | 279    | 16.00   | 406    | 2.16    | 55     |
| CTS66TFCSS     | 6.00 x 6.00 | 152 x 152 | Top Cover Sloped            | 11.00   | 279    | 16.00   | 406    | 2.16    | 55     |
| CTS33PTFCSS    | 3.00 x 3.00 | 76 x 76   | Top Cover Sloped Perforated | 7.00    | 178    | 11.00   | 279    | 1.06    | 27     |
| CTS44PTFCSS    | 4.00 x 4.00 | 102 x 102 | Top Cover Sloped Perforated | 9.00    | 229    | 14.00   | 356    | 1.42    | 36     |
| CTS46PTFCSS    | 4.00 x 6.00 | 102 x 152 | Top Cover Sloped Perforated | 11.00   | 279    | 16.00   | 406    | 2.16    | 55     |
| CTS66PTFCSS    | 6.00 x 6.00 | 152 x 152 | Top Cover Sloped Perforated | 11.00   | 279    | 16.00   | 406    | 2.16    | 55     |


### 90-DEGREE TEE-TOP COVER SLOPED OUTWARD



Used wherever two 90-degree transitions are required.

BULLETIN: F23

| Catalog Number | AxB in.     | AxB mm    | K (in.) | K (mm) |
|----------------|-------------|-----------|---------|--------|
| CTS44TFCOSS    | 4.00 x 4.00 | 102 x 102 | 1.42    | 36     |
| CTS46TFCOSS    | 4.00 x 6.00 | 102 x 152 | 2.16    | 55     |
| CTS66TFCOSS    | 6.00 x 6.00 | 152 x 152 | 2.16    | 55     |

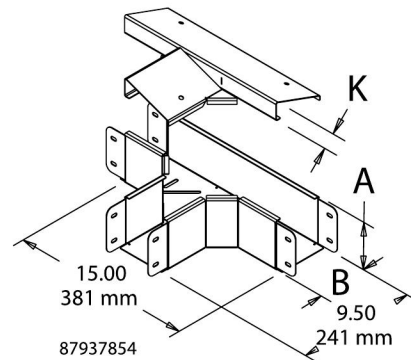


### 90-DEGREE TEE-INSIDE COVER SLOPED




Used wherever two 90-degree transitions are required.

BULLETIN: F23

| Catalog Number | AxB in.     | AxB mm    | K (in.) | K (mm) |
|----------------|-------------|-----------|---------|--------|
| CTS44TICSS     | 4.00 x 4.00 | 102 x 102 | 1.42    | 36     |
| CTS46TICSS     | 4.00 x 6.00 | 102 x 152 | 2.16    | 55     |
| CTS66TICSS     | 6.00 x 6.00 | 152 x 152 | 2.16    | 55     |

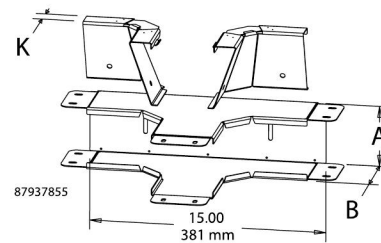

**90-DEGREE TEE—OUTSIDE COVER SLOPED**

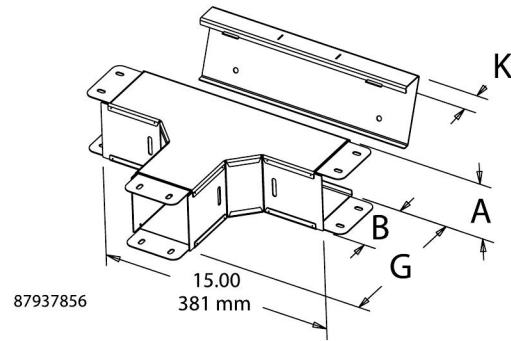


Used wherever two 90-degree transitions are required.

**BULLETIN: F23**

| Catalog Number | AxB in.     | AxB mm    | G (in.) | G (mm) | K (in.) | K (mm) |
|----------------|-------------|-----------|---------|--------|---------|--------|
| CTS44TOCSS     | 4.00 x 4.00 | 102 x 102 | 9.00    | 229    | 1.42    | 36     |
| CTS46TOCSS     | 4.00 x 6.00 | 102 x 152 | 11.00   | 279    | 2.16    | 55     |
| CTS66TOCSS     | 6.00 x 6.00 | 152 x 152 | 11.00   | 279    | 2.16    | 55     |

**CROSS**

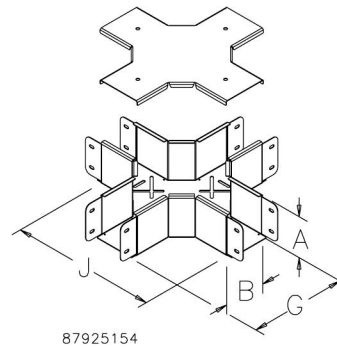

Available with or without perforations. Used where there are four branches.

**BULLETIN: F23**


| Catalog Number | AxB in.     | AxB mm    | Description | G (in.) | G (mm) | J (in.) | J (mm) |
|----------------|-------------|-----------|-------------|---------|--------|---------|--------|
| CT22CSS        | 2.00 x 2.00 | 51 x 51   | Standard    | 6.00    | 152    | 10      | 254    |
| CT33CSS        | 3.00 x 3.00 | 76 x 76   | Standard    | 7.00    | 178    | 11.00   | 279    |
| CT44CSS        | 4.00 x 4.00 | 102 x 102 | Standard    | 9.00    | 229    | 14.00   | 356    |
| CT46CSS        | 4.00 x 6.00 | 102 x 152 | Standard    | 11.00   | 279    | 16.00   | 406    |
| CT66CSS        | 6.00 x 6.00 | 152 x 152 | Standard    | 11.00   | 279    | 16.00   | 406    |
| CT22PCSS       | 2.00 x 2.00 | 51 x 51   | Perforated  | 6.00    | 152    | 10.00   | 254    |
| CT33PCSS       | 3.00 x 3.00 | 76 x 76   | Perforated  | 7.00    | 178    | 11.00   | 279    |
| CT44PCSS       | 4.00 x 4.00 | 102 x 102 | Perforated  | 9.00    | 229    | 14.00   | 356    |
| CT46PCSS       | 4.00 x 6.00 | 102 x 152 | Perforated  | 11.00   | 279    | 16.00   | 406    |
| CT66PCSS       | 6.00 x 6.00 | 152 x 152 | Perforated  | 11.00   | 279    | 16.00   | 406    |

CROSS-SLOPED TOP



Available with or without perforations. Used where there are four branches. Kit includes both left and right sloped covers to create any configuration.

BULLETIN: F23

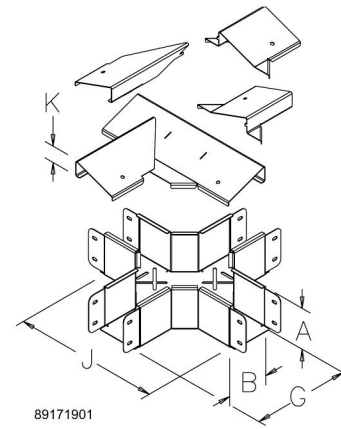

| Catalog Number | AxB in./mm               | Description           | G in./mm     | J in./mm     | K in./mm   |
|----------------|--------------------------|-----------------------|--------------|--------------|------------|
| CTS33CSS       | 3.00 x 3.00<br>76 x 76   | Sloped Top            | 7.00<br>178  | 11.00<br>279 | 1.06<br>27 |
| CT44CSS        | 4.00 x 4.00<br>102 x 102 | Sloped Top            | 9.00<br>229  | 14.00<br>356 | 1.42<br>36 |
| CTS46CSS       | 4.00 x 6.00<br>102 x 152 | Sloped Top            | 11.00<br>279 | 16.00<br>406 | 2.16<br>55 |
| CTS66CSS       | 6.00 x 6.00<br>152 x 152 | Sloped Top            | 11.00<br>279 | 16.00<br>406 | 2.16<br>55 |
| CTS33PCSS      | 3.00 x 3.00<br>76 x 76   | Perforated Sloped Top | 7.00<br>178  | 11.00<br>279 | 1.06<br>27 |
| CTS44PCSS      | 4.00 x 4.00<br>102 x 102 | Perforated Sloped Top | 9.00<br>229  | 14.00<br>356 | 1.42<br>36 |
| CTS46PCSS      | 4.00 x 6.00<br>102 x 152 | Perforated Sloped Top | 11.00<br>279 | 16.00<br>406 | 2.16<br>55 |
| CTS66PCSS      | 6.00 x 6.00<br>152 x 152 | Perforated Sloped Top | 11.00<br>279 | 16.00<br>406 | 2.16<br>55 |


DIVIDER 90-DEGREE TEE



Used to divide a 90-degree tee into two sections.

BULLETIN: F23

| Catalog Number | Fits Cable Tray Size | Description   | L (in.) | L (mm) | M (in.) | M (mm) |
|----------------|----------------------|---------------|---------|--------|---------|--------|
| CT33DTFCSS     | 3 x 3                | Top Cover     | 2.13    | 54     | —       | —      |
| CT44DTFCSS     | 4 x 4                | Top Cover     | 3.13    | 79     | —       | —      |
| CT46DTFCSS     | 4 x 6                | Top Cover     | 3.13    | 79     | —       | —      |
| CT66DTFCSS     | 6 x 6                | Top Cover     | 5.13    | 130    | —       | —      |
| CT33DTICSS     | 3 x 3                | Inside Cover  | 2.13    | 54     | 1.75    | 45     |
| CT44DTICSS     | 4 x 4                | Inside Cover  | 3.13    | 79     | 2.75    | 70     |
| CT66DTICSS     | 6 x 6                | Inside Cover  | 5.13    | 130    | 4.75    | 121    |
| CT33DTCSS      | 3 x 3                | Outside Cover | 2.13    | 54     | 2.58    | 66     |
| CT44DTCSS      | 4 x 4                | Outside Cover | 3.13    | 79     | 3.70    | 94     |
| CT66DTCSS      | 6 x 6                | Outside Cover | 5.13    | 130    | 5.70    | 145    |

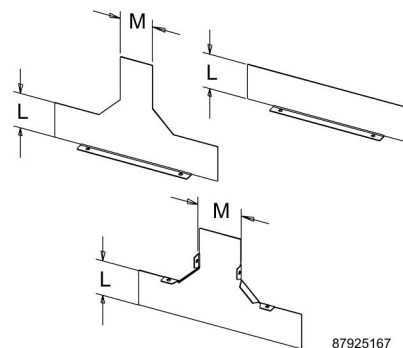


**DIVIDER 90-DEGREE ELBOW**



Used to divide a 90-degree elbow into two sections.

**BULLETIN: F23**

| Catalog Number | Description   | Fits Cable   |         |        |
|----------------|---------------|--------------|---------|--------|
|                |               | Tray Size    | L (in.) | L (mm) |
| CT33DEFC90SS   | Top Cover     | 3 x 3        | 2.13    | 54     |
| CT44DEFC90SS   | Top Cover     | 4 x 4        | 3.13    | 79     |
| CT46DEFC90SS   | Top Cover     | 4 x 6        | 3.13    | 79     |
| CT66DEFC90SS   | Top Cover     | 6 x 6        | 5.13    | 130    |
| CT33DEIC90SS   | Inside Cover  | 3 x 3        | 2.13    | 54     |
| CT44DEIC90SS   | Inside Cover  | 4 x 4, 4 x 6 | 3.13    | 79     |
| CT66DEIC90SS   | Inside Cover  | 6 x 6        | 5.13    | 130    |
| CT33DEOC90SS   | Outside Cover | 3 x 3        | 2.13    | 54     |
| CT44DEOC90SS   | Outside Cover | 4 x 4, 4 x 6 | 3.13    | 79     |
| CT66DEOC90SS   | Outside Cover | 6 x 6        | 5.13    | 130    |

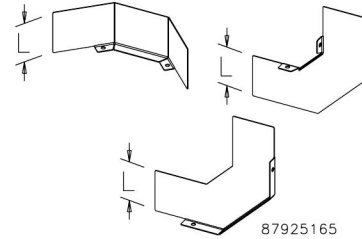

87925165


**DIVIDER 45-DEGREE ELBOW**



Used to divide a 45-degree elbow into two sections.

**BULLETIN: F23**

| Catalog Number | Description   | Fits Cable   |         |        |
|----------------|---------------|--------------|---------|--------|
|                |               | Tray Size    | L (in.) | L (mm) |
| CT33DEFC45SS   | Top Cover     | 3 x 3        | 2.13    | 54     |
| CT44DEFC45SS   | Top Cover     | 4 x 4        | 3.13    | 79     |
| CT46DEFC45SS   | Top Cover     | 4 x 6        | 3.13    | 79     |
| CT66DEFC45SS   | Top Cover     | 6 x 6        | 5.13    | 130    |
| CT33DEIC45SS   | Inside Cover  | 3 x 3        | 2.13    | 54     |
| CT44DEIC45SS   | Inside Cover  | 4 x 4, 4 x 6 | 3.13    | 79     |
| CT66DEIC45SS   | Inside Cover  | 6 x 6        | 5.13    | 130    |
| CT33DEOC45SS   | Outside Cover | 3 x 3        | 2.13    | 54     |
| CT44DEOC45SS   | Outside Cover | 4 x 4, 4 x 6 | 3.13    | 79     |
| CT66DEOC45SS   | Outside Cover | 6 x 6        | 5.13    | 130    |

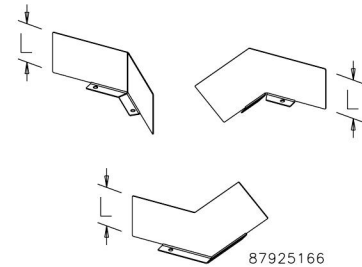

87925166


**U-CONNECTOR**



Used to connect two straight sections.

**BULLETIN: F23**

| Catalog Number | AxB in./mm               |
|----------------|--------------------------|
| CT22UCSS       | 2.00 x 2.00<br>51 x 51   |
| CT33UCSS       | 3.00 x 3.00<br>76 x 76   |
| CT44UCSS       | 4.00 x 4.00<br>102 x 102 |
| CT46UCSS       | 4.00 x 6.00<br>102 x 152 |
| CT66UCSS       | 6.00 x 6.00<br>152 x 152 |



87925155


### CLOSURE PLATE



Closes the end of a cable tray section or run.

**BULLETIN: F23**

| Catalog Number | AxB in.     | AxB mm    | Description |
|----------------|-------------|-----------|-------------|
| CT22CPSS       | 2.00 x 2.00 | 51 x 51   | Standard    |
| CT33CPSS       | 3.00 x 3.00 | 76 x 76   | Standard    |
| CT44CPSS       | 4.00 x 4.00 | 102 x 102 | Standard    |
| CT46CPSS       | 4.00 x 6.00 | 102 x 152 | Standard    |
| CT66CPSS       | 6.00 x 6.00 | 152 x 152 | Standard    |



87925156

### CLOSURE PLATE—SLOPED TOP




Closes the end of a cable tray section or run (left slope shown).

**BULLETIN: F23**

| Catalog Number | AxB in.     | AxB mm  | Description  | K (in.) | K (mm) |
|----------------|-------------|---------|--------------|---------|--------|
| CTS33CPRSS     | 3.00 x 3.00 | 76 x 76 | Sloped Right | 1.06    | 27     |
| CTS33CPLSS     | 3.00 x 3.00 | 76 x 76 | Sloped Left  | 1.06    | 27     |

| Catalog Number | AxB in.     | AxB mm    | Description  | K (in.) | K (mm) |
|----------------|-------------|-----------|--------------|---------|--------|
| CTS44CPRSS     | 4.00 x 4.00 | 102 x 102 | Sloped Right | 1.42    | 36     |
| CTS44CPLSS     | 4.00 x 4.00 | 102 x 102 | Sloped Left  | 1.42    | 36     |
| CTS46CPRSS     | 4.00 x 6.00 | 102 x 152 | Sloped Right | 2.16    | 55     |
| CTS46CPLSS     | 4.00 x 6.00 | 102 x 152 | Sloped Left  | 2.16    | 55     |
| CTS66CPRSS     | 6.00 x 6.00 | 152 x 152 | Sloped Right | 2.16    | 55     |
| CTS66CPLSS     | 6.00 x 6.00 | 152 x 152 | Sloped Left  | 2.16    | 55     |



89171974


### ENCLOSURE ADAPTER



Allows the cable tray to be securely connected to an enclosure.

**BULLETIN: F23**

| Catalog Number | AxB in./mm               |
|----------------|--------------------------|
| CT22AESS       | 2.00 x 2.00<br>51 x 51   |
| CT33AESS       | 3.00 x 3.00<br>76 x 76   |
| CT44AESS       | 4.00 x 4.00<br>102 x 102 |
| CT46AESS       | 4.00 x 6.00<br>102 x 152 |
| CT66AESS       | 6.00 x 6.00<br>152 x 152 |




87925157

**STRAIGHT SECTION SPLICE**



Used to connect two fittings with tabs.  
**BULLETIN: F23**

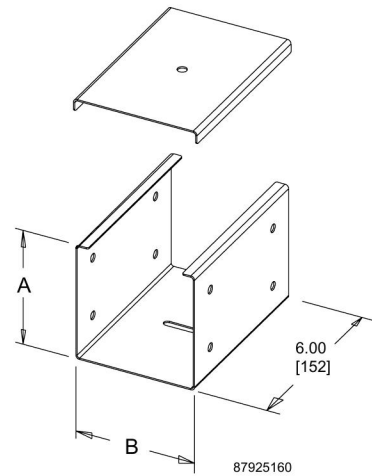


| Catalog Number | AxB in.     | AxB mm    | Description |
|----------------|-------------|-----------|-------------|
| CT22SPSS       | 2.00 x 2.00 | 51 x 51   | Standard    |
| CT33SPSS       | 3.00 x 3.00 | 76 x 76   | Standard    |
| CT44SPSS       | 4.00 x 4.00 | 102 x 102 | Standard    |
| CT46SPSS       | 4.00 x 6.00 | 102 x 152 | Standard    |
| CT66SPSS       | 6.00 x 6.00 | 152 x 152 | Standard    |
| CT22PSPSS      | 2.00 x 2.00 | 51 x 51   | Perforated  |
| CT33PSPSS      | 3.00 x 3.00 | 76 x 76   | Perforated  |
| CT44PSPSS      | 4.00 x 4.00 | 102 x 102 | Perforated  |
| CT46PSPSS      | 4.00 x 6.00 | 102 x 152 | Perforated  |
| CT66PSPSS      | 6.00 x 6.00 | 152 x 152 | Perforated  |

**STRAIGHT SECTION SPLICE—SLOPED TOP**



Used to connect two fittings with tabs.  
**BULLETIN: F23**

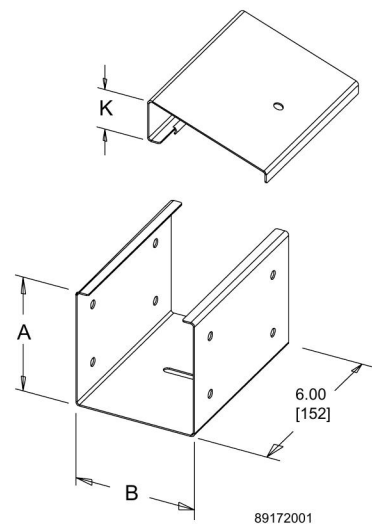


| Catalog Number | AxB in.     | AxB mm    | Description            | K (in.) | K (mm) |
|----------------|-------------|-----------|------------------------|---------|--------|
| CTS33SPSS      | 3.00 x 3.00 | 76 x 76   | Sloped Top             | 1.06    | 27     |
| CTS44SPSS      | 4.00 x 4.00 | 102 x 102 | Sloped Top             | 1.42    | 36     |
| CTS46SPSS      | 4.00 x 6.00 | 102 x 152 | Sloped Top             | 2.16    | 55     |
| CTS66SPSS      | 6.00 x 6.00 | 152 x 152 | Sloped Top             | 2.16    | 55     |
| CTS33PSPSS     | 3.00 x 3.00 | 76 x 76   | Sloped Top, Perforated | 1.06    | 27     |
| CTS44PSPSS     | 4.00 x 4.00 | 102 x 102 | Sloped Top, Perforated | 1.42    | 36     |
| CTS46PSPSS     | 4.00 x 6.00 | 102 x 152 | Sloped Top, Perforated | 2.16    | 55     |
| CTS66PSPSS     | 6.00 x 6.00 | 152 x 152 | Sloped Top, Perforated | 2.16    | 55     |

**REDUCER**




Used to reduce to a smaller size cable tray.

**BULLETIN: F23**

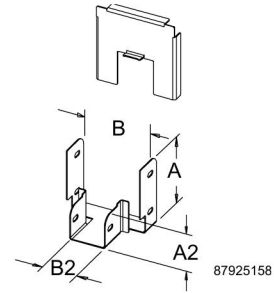

| Catalog Number | AxB in.     | AxB mm    | Description          | A2 (in.) | A2 (mm) | B2 (in.) | B2 (mm) |
|----------------|-------------|-----------|----------------------|----------|---------|----------|---------|
| CT3322RSS      | 3.00 x 3.00 | 76 x 76   | 3 x 3 2 x 2 Standard | 2.00     | 51      | 2.00     | 51      |
| CT4433RSS      | 4.00 x 4.00 | 102 x 102 | 4 x 4 3 x 3 Standard | 3.00     | 76      | 3.00     | 76      |
| CT4422RSS      | 4.00 x 4.00 | 102 x 102 | 4 x 4 2 x 2 Standard | 2.00     | 51      | 2.00     | 51      |
| CT4644RSS      | 4.00 x 6.00 | 102 x 152 | 4 x 6 4 x 4 Standard | 4.00     | 102     | 4.00     | 102     |
| CT4633RSS      | 4.00 x 6.00 | 102 x 152 | 4 x 6 3 x 3 Standard | 3.00     | 76      | 3.00     | 76      |
| CT6622RSS      | 6.00 x 6.00 | 152 x 152 | 6 x 6 2 x 2 Standard | 2.00     | 51      | 2.00     | 51      |
| CT6646RSS      | 6.00 x 6.00 | 152 x 152 | 6 x 6 4 x 6 Standard | 4.00     | 102     | 6.00     | 152     |
| CT6644RSS      | 6.00 x 6.00 | 152 x 152 | 6 x 6 4 x 4 Standard | 4.00     | 102     | 4.00     | 102     |
| CT6633RSS      | 6.00 x 6.00 | 152 x 152 | 6 x 6 3 x 3 Standard | 3.00     | 76      | 3.00     | 76      |

**REDUCER—SLOPED TOP**



Used to reduce to a smaller size cable tray (right slope shown).

**BULLETIN: F23**

| Catalog Number | AxB in.     | AxB mm    | Description          | A2 (in.) | A2 (mm) | B2 (in.) | B2 (mm) | K (in.) | K (mm) |
|----------------|-------------|-----------|----------------------|----------|---------|----------|---------|---------|--------|
| CTS4433RRSS    | 4.00 x 4.00 | 102 x 102 | 4x4 3x3 Sloped Right | 3.00     | 76      | 3.00     | 76      | 1.42    | 36     |
| CTS4433RLSS    | 4.00 x 4.00 | 102 x 102 | 4x4 3x3 Sloped Left  | 3.00     | 76      | 3.00     | 76      | 1.42    | 36     |
| CTS4633RRSS    | 4.00 x 6.00 | 102 x 152 | 4x6 3x3 Sloped Right | 3.00     | 76      | 3.00     | 76      | 2.16    | 55     |
| CTS4633RLSS    | 4.00 x 6.00 | 102 x 152 | 4x6 3x3 Sloped Left  | 3.00     | 76      | 3.00     | 76      | 2.16    | 55     |
| CTS4644RRSS    | 4.00 x 6.00 | 102 x 152 | 4x6 4x4 Sloped Right | 4.00     | 102     | 4.00     | 102     | 2.16    | 55     |
| CTS4644RLSS    | 4.00 x 6.00 | 102 x 152 | 4x6 4x4 Sloped Left  | 4.00     | 102     | 4.00     | 102     | 2.16    | 55     |
| CTS6633RRSS    | 6.00 x 6.00 | 152 x 152 | 6x6 3x3 Sloped Right | 3.00     | 76      | 3.00     | 76      | 2.16    | 55     |
| CTS6633RLSS    | 6.00 x 6.00 | 152 x 152 | 6x6 3x3 Sloped Left  | 3.00     | 76      | 3.00     | 76      | 2.16    | 55     |
| CTS6644RRSS    | 6.00 x 6.00 | 152 x 152 | 6x6 4x4 Sloped Right | 4.00     | 102     | 4.00     | 102     | 2.16    | 55     |
| CTS6644RLSS    | 6.00 x 6.00 | 152 x 152 | 6x6 4x4 Sloped Left  | 4.00     | 102     | 4.00     | 102     | 2.16    | 55     |
| CTS6646RRSS    | 6.00 x 6.00 | 152 x 152 | 6x6 4x6 Sloped Right | 4.00     | 102     | 4.00     | 102     | 2.16    | 55     |
| CTS6646RLSS    | 6.00 x 6.00 | 152 x 152 | 6x6 4x6 Sloped Left  | 4.00     | 102     | 4.00     | 102     | 2.16    | 55     |


**CABLE EXIT COVER**



Covers cables that exit the side of the cable tray. Will cover a keyhole or slot used to pass the cable through.

**BULLETIN: F23**

| Catalog Number |
|----------------|
| CT2233CEC      |
| CT4466CEC      |



87925159


**DIVIDER STRAIGHT SECTION SPLICE**



Used to divide a straight section splice into two sections.

**BULLETIN: F23**

| Catalog Number | H in./mm    | L in./mm    | Fits Cable Tray Size |
|----------------|-------------|-------------|----------------------|
| CT33DSPSS      | 2.13<br>54  | 6.00<br>152 | 3 x 3                |
| CT44DSPSS      | 3.13<br>79  | 6.00<br>152 | 4 x 4, 4 x 6         |
| CT66DSPSS      | 5.13<br>130 | 6.00<br>152 | 6 x 6                |

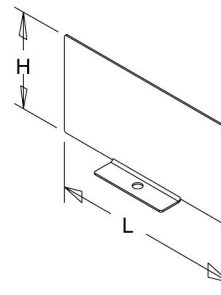

87925164


**TRANSITION COVER**



Transitions from a sloped to standard cable tray. Available with right- and left-hand slope. Will fit the Splice (order separately) or anywhere on a straight section (transition cover sloped to flat left-hand shown in drawing).


**BULLETIN: F23**

| Catalog Number | Description                                | Fits Cable Tray Size | B in./mm    | K in./mm   |
|----------------|--|----------------------|-------------|------------|
| CTS33TCRSS     | Transition Cover Sloped to Flat Right Hand | 3 x 3                | 3.00<br>76  | 1.06<br>27 |
| CTS33TCLSS     | Transition Cover Sloped to Flat Left Hand  | 3 x 3                | 3.00<br>76  | 1.06<br>27 |
| CTS44TCRSS     | Transition Cover Sloped to Flat Right Hand | 4 x 4                | 4.00<br>102 | 1.42<br>36 |
| CTS44TCLSS     | Transition Cover Sloped to Flat Left Hand  | 4 x 4                | 4.00<br>102 | 1.42<br>36 |
| CTS46TCRSS     | Transition Cover Sloped to Flat Right Hand | 4 x 6, 6 x 6         | 6.00<br>152 | 2.16<br>55 |
| CTS46TCLSS     | Transition Cover Sloped to Flat Left Hand  | 4 x 6, 6 x 6         | 6.00<br>152 | 2.16<br>55 |

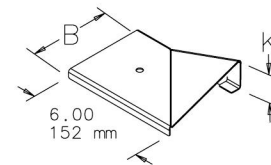

87925161




**SIDE COUPLING**


Used to connect straight sections or fittings to the side of a cable tray run. A cutout will be required in the side of the cable tray.

**BULLETIN: F23**

| Catalog Number | AxB in.     | AxB mm    |
|----------------|-------------|-----------|
| CT22SCSS       | 2.00 x 2.00 | 51 x 51   |
| CT33SCSS       | 3.00 x 3.00 | 76 x 76   |
| CT44SCSS       | 4.00 x 4.00 | 102 x 102 |
| CT46SCSS       | 4.00 x 6.00 | 102 x 152 |
| CT66SCSS       | 6.00 x 6.00 | 152 x 152 |



87925162

**FASTENER PACKAGE**

1/4-20 stainless steel fasteners used to connect cable tray components.

**BULLETIN: F23**


| Catalog Number | Screws | Nuts |
|----------------|--------|------|
| CT1420SS       | 100    | 100  |

**HANGER BRACKET**

Used to support a cable tray run. 20 per package.

**BULLETIN: F23**

| Catalog Number | Fits Cable Tray Size | M<br>in./mm |
|----------------|----------------------|-------------|
| CT22HB         | 2x2                  | 3.58<br>91  |
| CT33HB         | 3x3                  | 4.58<br>116 |
| CT44HB         | 4x4                  | 5.58<br>142 |
| CT66HB         | 6x6                  | 7.58<br>193 |



87925170


**L-BRACKET**

Used to support a cable tray run. Can be mounted to a vertical UNISTRUT® channel. 20 per package.

UNISTRUT is a registered trademark of Unistrut Corporation.

**BULLETIN: F23**

| Catalog Number | Fits Cable Tray Size | N<br>in./mm | P<br>in./mm |
|----------------|----------------------|-------------|-------------|
| CT22LB         | 2x2                  | 3.00<br>76  | 3.64<br>92  |
| CT33LB         | 3x3                  | 4.00<br>102 | 4.64<br>118 |
| CT44LB         | 4x4                  | 5.00<br>127 | 5.64<br>143 |
| CT66LB         | 6x6                  | 7.64<br>194 | 7.64<br>194 |

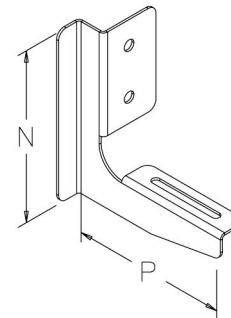


87925169

### WALL BRACKET

Used to support a cable tray run. 20 per package.

BULLETIN: F23

| Catalog Number | Fits Cable Tray Size | R<br>in./mm | S<br>in./mm |
|----------------|----------------------|-------------|-------------|
| CT22WB         | 2 x                  | 1.55<br>39  | 2.25<br>57  |
| CT33WB         | 3 x 3                | 2.55<br>65  | 3.25<br>83  |
| CT44WB         | 4 x 4                | 3.55<br>90  | 4.25<br>108 |
| CT66WB         | 6 x 6                | 5.55<br>141 | 6.25<br>159 |



### LATCH HARDWARE KITS

BULLETIN: F23

| Catalog Number | Use with Cable Tray Size |
|----------------|--------------------------|
| CTLCHSS        | 2 x 2, 4 x 6, 6 x 6      |
| CTLCH3SS       | 3 x 3                    |
| CTLCH4SS       | 4 x 4                    |
| CTSLCHSS       | Sloped                   |