

CLEAN TRAY STAINLESS STEEL CABLE TRAY, TYPE 1



INDUSTRY STANDARDS

UL Classified; File No. E263414
 This product is classified as to its suitability as an equipment grounding conductor only.

NEMA/EEMAC Type 1

APPLICATION

The Clean Tray Stainless Steel Cable Tray is designed to protect rated cabling in applications that require frequent washdown. A variety of sloped-top fittings with front, inside or outside cover options allows for highly-customized runs using standard catalog product and supports directional control of washdown effluence.

FEATURES


- Adjustable dividers
- Tops and sides can completely open
- Flat cover and 20-degree sloped cover models available
- Perforated fittings and straight sections
- Elbows contain three cover options: front, inside and outside
- Connecting hardware is included with each model
- Quarter-turn latches

SPECIFICATIONS

- 18 gauge stainless steel

FINISH

Smooth brushed finish

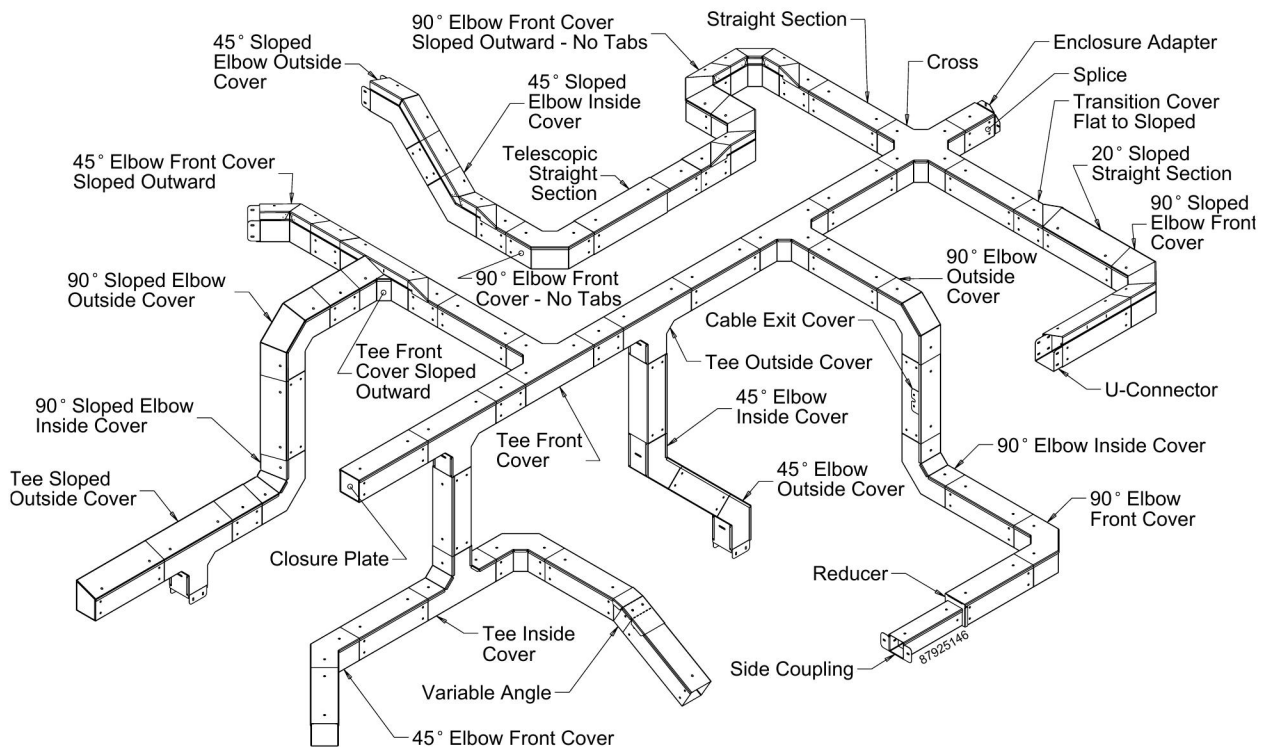


STRAIGHT SECTION



Straight sections are available in 10-ft. lengths with or without perforations. Available with a 20-degree sloped cover in some sizes. One U-connector and hardware is supplied with each straight section.

BULLETIN: F23

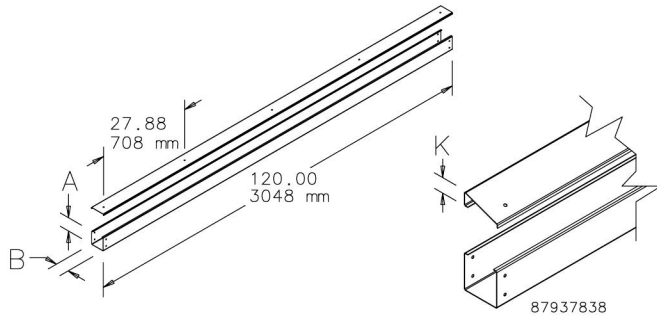


| Catalog Number | AxBxC in./mm | Description | K in./mm |
|----------------|--|-----------------------|------------|
| CT22120SS | 2.00 x 2.00 x 120.00 51 x 51 x 3048 | Standard | — |
| CT33120SS | 3.00 x 3.00 x 120.00 76 x 76 x 3048 | Standard | — |
| CT44120SS | 4.00 x 4.00 x 120.00 102 x 102 x 3048 | Standard | — |
| CT46120SS | 4.00 x 6.00 x 120.00 102 x 152 x 3048 | Standard | — |
| CT66120SS | 6.00 x 6.00 x 120.00 152 x 152 x 3048 | Standard | — |
| CT22P120SS | 2.00 x 2.00 x 120.00 51 x 51 x 3048 | Perforated | — |
| CT33P120SS | 3.00 x 3.00 x 120.00 76 x 76 x 3048 | Perforated | — |
| CT44P120SS | 4.00 x 4.00 x 120.00 102 x 102 x 3048 | Perforated | — |
| CT46P120SS | 4.00 x 6.00 x 120.00 102 x 152 x 3048 | Perforated | — |
| CT66P120SS | 6.00 x 6.00 x 120.00 152 x 152 x 3048 | Perforated | — |
| CTS33120SS | 3.00 x 3.00 x 120.00 76 x 76 x 3048 | Sloped Top | 1.06 24 |
| CTS44120SS | 4.00 x 4.00 x 120.00 102 x 102 x 3048 | Sloped Top | 1.42 36 |
| CTS46120SS | 4.00 x 6.00 x 120.00 102 x 152 x 3048 | Sloped Top | 2.16 55 |
| CTS66120SS | 6.00 x 6.00 x 120.00 152 x 152 x 3048 | Sloped Top | 2.16 55 |
| CTS33P120SS | 3.00 x 3.00 x 120.00 76 x 76 x 3048 | Sloped Top Perforated | 1.06 27 |
| CTS44P120SS | 4.00 x 4.00 x 120.00 102 x 102 x 3048 | Sloped Top Perforated | 1.42 36 |
| CTS46P120SS | 4.00 x 6.00 x 120.00 102 x 152 x 3048 | Sloped Top Perforated | 2.16 55 |
| CTS66P120SS | 6.00 x 6.00 x 120.00 152 x 152 x 3048 | Sloped Top Perforated | 2.16 55 |

DIVIDER STRAIGHT SECTION

Used to divide one straight section into two sections.

BULLETIN: F23

| Catalog Number | H in./mm | L in./mm | Fits Cable Tray Size in./mm |
|----------------|-------------|-------------|--|
| CT33DSS | 2.13 54 | 120 3048 | 3.00 x 3.00 76 x 76 |
| CT44DSS | 3.13 79 | 120 3048 | 4.00 x 4.00, 4.00 x 6.00 102 x 102, 102 x 152 |
| CT66DSS | 5.13 130 | 120 3048 | 6.00 x 6.00 152 x 152 |

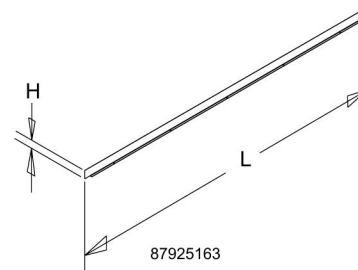


TELESCOPIC STRAIGHT SECTION



Adjusts from 18.74 in. to 30.61 in.

BULLETIN: F23

| Catalog Number | AxB in. | AxB mm |
|----------------|-------------|-----------|
| CT22TSS | 2.00 x 2.00 | 51 x 51 |
| CT33TSS | 3.00 x 3.00 | 76 x 76 |
| CT44TSS | 4.00 x 4.00 | 102 x 102 |
| CT46TSS | 4.00 x 6.00 | 102 x 152 |
| CT66TSS | 6.00 x 6.00 | 152 x 152 |

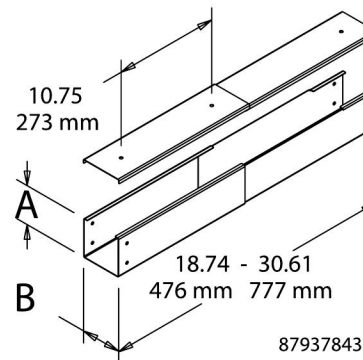

DIVIDER, TELESCOPIC STRAIGHT SECTION

Must be trimmed to length.


BULLETIN: F23

| Catalog Number | AxB in. | AxB mm |
|----------------|-------------|-----------|
| CT33TDSPPSS | 3.00 x 3.00 | 76 x 76 |
| CT44TDSPPSS | 4.00 x 4.00 | 102 x 102 |
| CT66TDSPPSS | 6.00 x 6.00 | 152 x 152 |

90-DEGREE ELBOWS



BULLETIN: F23

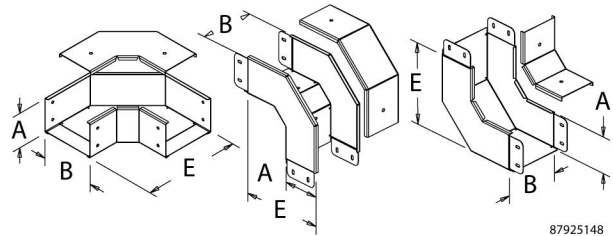

87925148

Used wherever a 90-degree transition is required. Models without tabs connect directly to another elbow without using a splice.


| Catalog Number | AxB in. | AxB mm | Description | E (in.) | E (mm) | K (in.) | K (mm) |
|----------------|-------------|-----------|------------------------|---------|--------|---------|--------|
| CT22EFC90SS | 2.00 x 2.00 | 51 x 51 | Top Cover | 6.00 | 152 | — | — |
| CT33EFC90SS | 3.00 x 3.00 | 76 x 76 | Top Cover | 7.00 | 178 | — | — |
| CT44EFC90SS | 4.00 x 4.00 | 102 x 102 | Top Cover | 9.00 | 229 | — | — |
| CT46EFC90SS | 4.00 x 6.00 | 102 x 152 | Top Cover | 11.00 | 279 | — | — |
| CT66EFC90SS | 6.00 x 6.00 | 152 x 152 | Top Cover | 11.00 | 279 | — | — |
| CT22EFCNT90SS | 2.00 x 2.00 | 51 x 51 | Top Cover without Tabs | 6.00 | 152 | — | — |
| CT33EFCNT90SS | 3.00 x 3.00 | 76 x 76 | Top Cover without Tabs | 7.00 | 178 | — | — |
| CT44EFCNT90SS | 4.00 x 4.00 | 102 x 102 | Top Cover without Tabs | 9.00 | 229 | 1.42 | 36 |
| CT46EFCNT90SS | 4.00 x 6.00 | 102 x 152 | Top Cover without Tabs | 11.00 | 279 | 2.16 | 55 |
| CT66EFCNT90SS | 6.00 x 6.00 | 152 x 152 | Top Cover without Tabs | 11.00 | 279 | 2.16 | 55 |
| CT22EIC90SS | 2.00 x 2.00 | 51 x 51 | Inside Cover | 6.00 | 152 | — | — |
| CT33EIC90SS | 3.00 x 3.00 | 76 x 76 | Inside Cover | 7.00 | 178 | — | — |
| CT44EIC90SS | 4.00 x 4.00 | 102 x 102 | Inside Cover | 9.00 | 229 | — | — |
| CT46EIC90SS | 4.00 x 6.00 | 102 x 152 | Inside Cover | 11.00 | 279 | — | — |
| CT66EIC90SS | 6.00 x 6.00 | 152 x 152 | Inside Cover | 11.00 | 279 | — | — |
| CT22EOC90SS | 2.00 x 2.00 | 51 x 51 | Outside Cover | 6.00 | 152 | — | — |
| CT33EOC90SS | 3.00 x 3.00 | 76 x 76 | Outside Cover | 7.00 | 178 | — | — |
| CT44EOC90SS | 4.00 x 4.00 | 102 x 102 | Outside Cover | 9.00 | 229 | — | — |
| CT46EOC90SS | 4.00 x 6.00 | 102 x 152 | Outside Cover | 11.00 | 279 | — | — |
| CT66EOC90SS | 6.00 x 6.00 | 152 x 152 | Outside Cover | 11.00 | 279 | — | — |
| CT22PEFC90SS | 2.00 x 2.00 | 51 x 51 | Top Cover Perforated | 6.00 | 152 | — | — |
| CT33PEFC90SS | 3.00 x 3.00 | 76 x 76 | Top Cover Perforated | 7.00 | 178 | — | — |
| CT44PEFC90SS | 4.00 x 4.00 | 102 x 102 | Top Cover Perforated | 9.00 | 229 | — | — |
| CT46PEFC90SS | 4.00 x 6.00 | 102 x 152 | Top Cover Perforated | 11.00 | 279 | — | — |
| CT66PEFC90SS | 6.00 x 6.00 | 152 x 152 | Top Cover Perforated | 11.00 | 279 | — | — |

90-DEGREE ELBOWS—TOP COVER SLOPED INWARD



Used wherever a 90-degree transition is required. Models without tabs connect directly to another elbow without using a splice.

BULLETIN: F23



89168777


| Catalog Number | AxB in. | AxB mm | Description | E (in.) | E (mm) | K (in.) | K (mm) |
|----------------|-------------|-----------|------------------------------------|---------|--------|---------|--------|
| CTS33EFC90SS | 3.00 x 3.00 | 76 x 76 | Top Cover Sloped Inward | 7.00 | 178 | 1.06 | 27 |
| CTS44EFC90SS | 4.00 x 4.00 | 102 x 102 | Top Cover Sloped Inward | 9.00 | 229 | 1.42 | 36 |
| CTS46EFC90SS | 4.00 x 6.00 | 102 x 152 | Top Cover Sloped Inward | 11.00 | 279 | 2.16 | 55 |
| CTS66EFC90SS | 6.00 x 6.00 | 152 x 152 | Top Cover Sloped Inward | 11.00 | 279 | 2.16 | 55 |
| CTS33PEFC90SS | 3.00 x 3.00 | 76 x 76 | Top Cover Sloped Inward Perforated | 7.00 | 178 | 1.06 | 27 |
| CTS44PEFC90SS | 4.00 x 4.00 | 102 x 102 | Top Cover Sloped Inward Perforated | 9.00 | 229 | 1.42 | 36 |
| CTS46PEFC90SS | 4.00 x 6.00 | 102 x 152 | Top Cover Sloped Inward Perforated | 11.00 | 279 | 2.16 | 55 |
| CTS66PEFC90SS | 6.00 x 6.00 | 152 x 152 | Top Cover Sloped Inward Perforated | 11.00 | 279 | 2.16 | 55 |

90-DEGREE ELBOWS—PERFORATED WITHOUT TABS



Used wherever a 90-degree transition is required.
BULLETIN: F23

| Catalog Number | AxB in. | AxB mm | E (in.) | E (mm) |
|----------------|-------------|-----------|---------|--------|
| CT22PEFCNT90SS | 2.00 x 2.00 | 51 x 51 | 6.00 | 152 |
| CT33PEFCNT90SS | 3.00 x 3.00 | 76 x 76 | 7.00 | 178 |
| CT44PEFCNT90SS | 4.00 x 4.00 | 102 x 102 | 9.00 | 229 |
| CT46PEFCNT90SS | 4.00 x 6.00 | 102 x 152 | 11.00 | 279 |
| CT66PEFCNT90SS | 6.00 x 6.00 | 152 x 152 | 11.00 | 279 |

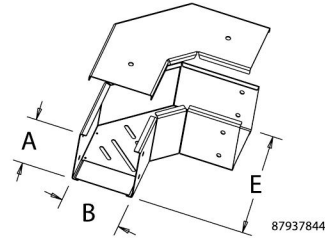


90-DEGREE ELBOWS—TOP COVER SLOPED INWARD WITHOUT TABS



Used wherever a 90-degree transition is required.
BULLETIN: F23

| Catalog Number | AxB in./mm | E in./mm | K in./mm |
|----------------|-------------|----------|----------|
| CTS44EFCNT90SS | 4.00 x 4.00 | 9.00 | 1.42 |
| | 102 x 102 | 229 | 36 |
| CTS46EFCNT90SS | 4.00 x 6.00 | 11.00 | 2.16 |
| | 102 x 152 | 279 | 55 |
| CTS66EFCNT90SS | 6.00 x 6.00 | 11.00 | 2.16 |
| | 152 x 152 | 279 | 55 |

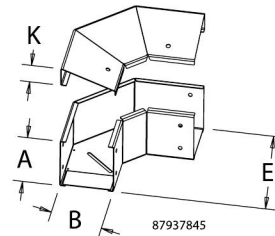


90-DEGREE ELBOWS—TOP COVER SLOPED OUTWARD WITH TABS



Used wherever a 90-degree transition is required.
BULLETIN: F23

| Catalog Number | AxB in./mm | E in./mm | K in./mm |
|----------------|-------------|----------|----------|
| CTS44EFCO90SS | 4.00 x 4.00 | 9.00 | 1.42 |
| | 102 x 102 | 229 | 36 |
| CTS46EFCO90SS | 4.00 x 6.00 | 11.00 | 2.16 |
| | 102 x 152 | 279 | 55 |
| CTS66EFCO90SS | 6.00 x 6.00 | 11.00 | 2.16 |
| | 152 x 152 | 279 | 55 |

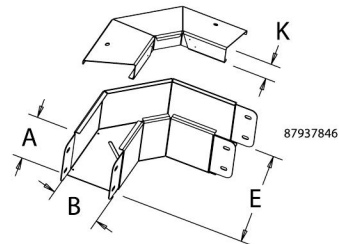


90-DEGREE ELBOWS—TOP COVER SLOPED OUTWARD WITHOUT TABS



Used wherever a 90-degree transition is required.
BULLETIN: F23

| Catalog Number | AxB in./mm | E in./mm | K in./mm |
|-----------------|-------------|----------|----------|
| CTS44EFCONT90SS | 4.00 x 4.00 | 9.00 | 1.42 |
| | 102 x 102 | 229 | 36 |
| CTS46EFCONT90SS | 4.00 x 6.00 | 11.00 | 2.16 |
| | 102 x 152 | 279 | 55 |
| CTS66EFCONT90SS | 6.00 x 6.00 | 11.00 | 2.16 |
| | 152 x 152 | 279 | 55 |

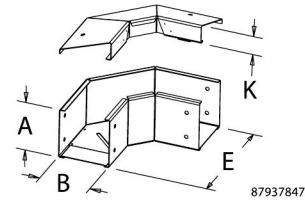


90-DEGREE ELBOWS—INSIDE COVER SLOPED



Used wherever a 90-degree transition is required.
BULLETIN: F23


| Catalog Number | AxB in./mm | E in./mm | K in./mm |
|----------------|-------------|----------|----------|
| CTS44EIC90SS | 4.00 x 4.00 | 9.00 | 1.42 |
| | 102 x 102 | 229 | 36 |
| CTS46EIC90SS | 4.00 x 6.00 | 11.00 | 2.16 |
| | 102 x 152 | 279 | 55 |
| CTS66EIC90SS | 6.00 x 6.00 | 11.00 | 2.16 |
| | 152 x 152 | 279 | 55 |

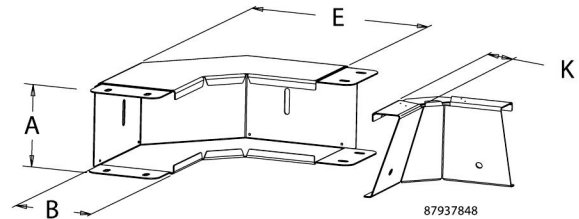

90-DEGREE ELBOWS—OUTSIDE COVER SLOPED




Used wherever a 90-degree transition is required.
BULLETIN: F23

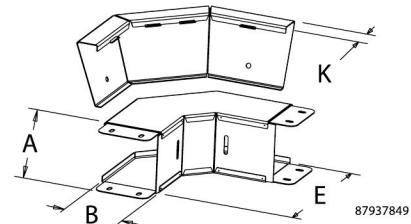

| Catalog Number | AxB in./mm | E in./mm | K in./mm |
|----------------|-------------|----------|----------|
| CTS44EOC90SS | 4.00 x 4.00 | 9.00 | 1.42 |
| | 102 x 102 | 229 | 36 |
| CTS46EOC90SS | 4.00 x 6.00 | 11.00 | 2.16 |
| | 102 x 152 | 279 | 55 |
| CTS66EOC90SS | 6.00 x 6.00 | 11.00 | 2.16 |
| | 152 x 152 | 279 | 55 |

45-DEGREE ELBOWS

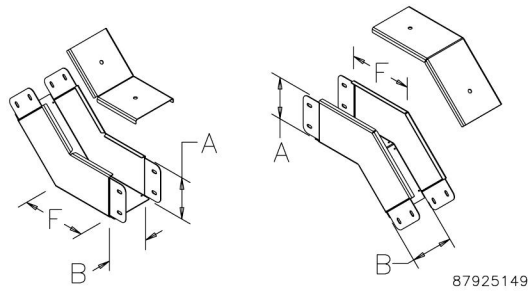


Used wherever a 45-degree transition is required.

BULLETIN: F23

| Catalog Number | AxB in. | AxB mm | Description | F (in.) | F (mm) |
|----------------|-------------|-----------|----------------------|---------|--------|
| CT22EFC45SS | 2.00 x 2.00 | 51 x 51 | Top Cover | 4.57 | 116 |
| CT33EFC45SS | 3.00 x 3.00 | 76 x 76 | Top Cover | 4.98 | 127 |
| CT44EFC45SS | 4.00 x 4.00 | 102 x 102 | Top Cover | 5.96 | 151 |
| CT46EFC45SS | 4.00 x 6.00 | 102 x 152 | Top Cover | 6.79 | 173 |
| CT66EFC45SS | 6.00 x 6.00 | 152 x 152 | Top Cover | 6.79 | 173 |
| CT22EIC45SS | 2.00 x 2.00 | 51 x 51 | Inside Cover | 4.57 | 116 |
| CT33EIC45SS | 3.00 x 3.00 | 76 x 76 | Inside Cover | 4.98 | 127 |
| CT44EIC45SS | 4.00 x 4.00 | 102 x 102 | Inside Cover | 5.96 | 151 |
| CT46EIC45SS | 4.00 x 6.00 | 102 x 152 | Inside Cover | 6.79 | 173 |
| CT66EIC45SS | 6.00 x 6.00 | 152 x 152 | Inside Cover | 6.79 | 173 |
| CT22EOC45SS | 2.00 x 2.00 | 51 x 51 | Outside Cover | 4.57 | 116 |
| CT33EOC45SS | 3.00 x 3.00 | 76 x 76 | Outside Cover | 4.98 | 127 |
| CT44EOC45SS | 4.00 x 4.00 | 102 x 102 | Outside Cover | 5.96 | 151 |
| CT46EOC45SS | 4.00 x 6.00 | 102 x 152 | Outside Cover | 6.79 | 173 |
| CT66EOC45SS | 6.00 x 6.00 | 152 x 152 | Outside Cover | 6.79 | 173 |
| CT22PEFC45SS | 2.00 x 2.00 | 51 x 51 | Top Cover Perforated | 4.57 | 116 |
| CT33PEFC45SS | 3.00 x 3.00 | 76 x 76 | Top Cover Perforated | 4.98 | 127 |
| CT44PEFC45SS | 4.00 x 4.00 | 102 x 102 | Top Cover Perforated | 5.96 | 151 |
| CT46PEFC45SS | 4.00 x 6.00 | 102 x 152 | Top Cover Perforated | 6.79 | 173 |
| CT66PEFC45SS | 6.00 x 6.00 | 152 x 152 | Top Cover Perforated | 6.79 | 173 |

45-DEGREE ELBOWS—TOP COVER SLOPED INWARD

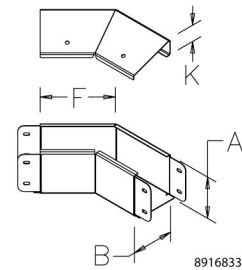

Used wherever a 45-degree transition is required.

BULLETIN: F23

| Catalog Number | AxB in. | AxB mm | Description | F (in.) | F (mm) | K (in.) | K (mm) |
|----------------|-------------|-----------|------------------------------------|---------|--------|---------|--------|
| CTS33EFC45SS | 3.00 x 3.00 | 76 x 76 | Top Cover Sloped Inward | 4.98 | 127 | 1.06 | 27 |
| CTS44EFC45SS | 4.00 x 4.00 | 102 x 102 | Top Cover Sloped Inward | 5.96 | 151 | 1.42 | 36 |
| CTS46EFC45SS | 4.00 x 6.00 | 102 x 152 | Top Cover Sloped Inward | 6.79 | 173 | 2.16 | 55 |
| CTS66EFC45SS | 6.00 x 6.00 | 152 x 152 | Top Cover Sloped Inward | 6.79 | 173 | 2.16 | 55 |
| CTS33PEFC45SS | 3.00 x 3.00 | 76 x 76 | Top Cover Sloped Inward Perforated | 4.98 | 127 | 1.06 | 27 |
| CTS44PEFC45SS | 4.00 x 4.00 | 102 x 102 | Top Cover Sloped Inward Perforated | 5.96 | 151 | 1.42 | 36 |
| CTS46PEFC45SS | 4.00 x 6.00 | 102 x 152 | Top Cover Sloped Inward Perforated | 6.79 | 173 | 2.16 | 55 |
| CTS66PEFC45SS | 6.00 x 6.00 | 152 x 152 | Top Cover Sloped Inward Perforated | 6.79 | 173 | 2.16 | 55 |


45-DEGREE ELBOWS—TOP COVER SLOPED OUTWARD



Used wherever a 45-degree transition is required.

BULLETIN: F23

| Catalog Number | AxB in./mm | F in./mm | K in./mm |
|----------------|-------------|----------|----------|
| CTS44EFCO45SS | 4.00 x 4.00 | 5.96 | 1.42 |
| | 102 x 102 | 151 | 36 |
| CTS46EFCO45SS | 4.00 x 6.00 | 6.79 | 2.16 |
| | 102 x 152 | 173 | 55 |
| CTS66EFCO45SS | 6.00 x 6.00 | 6.79 | 2.16 |
| | 152 x 152 | 173 | 55 |




45-DEGREE ELBOWS—INSIDE COVER SLOPED



Used wherever a 45-degree transition is required.

BULLETIN: F23

| Catalog Number | AxB in./mm | F in./mm | K in./mm |
|----------------|-------------|----------|----------|
| CTS66EIC45SS | 6.00 x 6.00 | 6.79 | 2.16 |
| | 152 x 152 | 173 | 55 |



| Catalog Number | AxB in./mm | F in./mm | K in./mm |
|----------------|-------------|----------|----------|
| CTS44EIC45SS | 4.00 x 4.00 | 5.96 | 1.42 |
| | 102 x 102 | 151 | 36 |
| CTS46EIC45SS | 4.00 x 6.00 | 6.79 | 2.16 |
| | 102 x 152 | 173 | 55 |


45-DEGREE ELBOWS—OUTSIDE COVER SLOPED



Used wherever a 45-degree transition is required.

BULLETIN: F23

| Catalog Number | AxB in./mm | F in./mm | K in./mm |
|----------------|-------------|----------|----------|
| CTS44EOC45SS | 4.00 x 4.00 | 5.96 | 1.42 |
| | 102 x 102 | 151 | 36 |
| CTS46EOC45SS | 4.00 x 6.00 | 6.79 | 2.16 |
| | 102 x 152 | 173 | 55 |
| CTS66EOC45SS | 6.00 x 6.00 | 6.79 | 2.16 |
| | 152 x 152 | 173 | 55 |




VARIABLE-ANGLE ELBOW FITTING



Adjustable from 0 to 90 degrees. Simplifies and saves field integration and installation time.

BULLETIN: F23

| Catalog Number | AxB in. | AxB mm |
|----------------|-------------|-----------|
| CT22VSS | 2.00 x 2.00 | 51 x 51 |
| CT33VSS | 3.00 x 3.00 | 76 x 76 |
| CT44VSS | 4.00 x 4.00 | 102 x 102 |
| CT46VSS | 4.00 x 6.00 | 102 x 152 |
| CT66VSS | 6.00 x 6.00 | 152 x 152 |

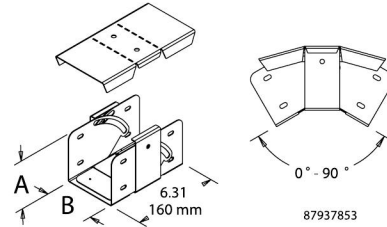


90-DEGREE TEE




Available with or without perforations in three cover options: top, inside and outside. Used wherever two 90-degree transitions are required.

BULLETIN: F23

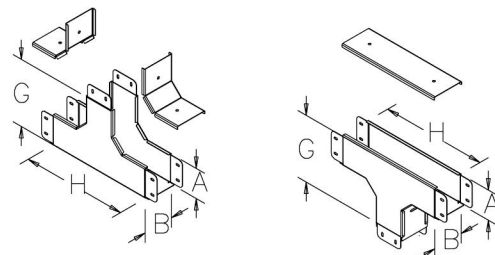

| Catalog Number | AxB in. | AxB mm | Description | G (in.) | G (mm) | H (in.) | H (mm) |
|----------------|-------------|-----------|----------------------|---------|--------|---------|--------|
| CT22TFCSS | 2.00 x 2.00 | 51 x 51 | Top Cover | 3.00 | 152 | 10.00 | 254 |
| CT33TFCSS | 3.00 x 3.00 | 76 x 76 | Top Cover | 9.00 | 229 | 14.00 | 356 |
| CT44TFCSS | 4.00 x 4.00 | 102 x 102 | Top Cover | 7.00 | 178 | 11.00 | 279 |
| CT46TFCSS | 4.00 x 6.00 | 102 x 152 | Top Cover | 11.00 | 279 | 16.00 | 406 |
| CT66TFCSS | 6.00 x 6.00 | 152 x 152 | Top Cover | 11.00 | 279 | 16.00 | 406 |
| CT33TICSS | 3.00 x 3.00 | 76 x 76 | Inside Cover | 7.00 | 178 | 11.00 | 279 |
| CT44TICSS | 4.00 x 4.00 | 102 x 102 | Inside Cover | 9.00 | 229 | 14.00 | 356 |
| CT46TICSS | 4.00 x 6.00 | 102 x 152 | Inside Cover | 11.00 | 279 | 16.00 | 406 |
| CT66TICSS | 6.00 x 6.00 | 152 x 152 | Inside Cover | 11.00 | 279 | 16.00 | 406 |
| CT22TOCSS | 2.00 x 2.00 | 51 x 51 | Outside Cover | 6.00 | 152 | 10.00 | 254 |
| CT33TOCSS | 3.00 x 3.00 | 76 x 76 | Outside Cover | 7.00 | 178 | 11.00 | 279 |
| CT44TOCSS | 4.00 x 4.00 | 102 x 102 | Outside Cover | 9.00 | 229 | 14.00 | 356 |
| CT46TOCSS | 4.00 x 6.00 | 102 x 152 | Outside Cover | 11.00 | 279 | 16.00 | 406 |
| CT66TOCSS | 6.00 x 6.00 | 152 x 152 | Outside Cover | 11.00 | 279 | 16.00 | 406 |
| CT22PTFCSS | 2.00 x 2.00 | 51 x 51 | Top Cover Perforated | 6.00 | 152 | 10.00 | 254 |
| CT33PTFCSS | 3.00 x 3.00 | 76 x 76 | Top Cover Perforated | 7.00 | 178 | 11.00 | 279 |
| CT44PTFCSS | 4.00 x 4.00 | 102 x 102 | Top Cover Perforated | 9.00 | 229 | 14.00 | 356 |
| CT46PTFCSS | 4.00 x 6.00 | 102 x 152 | Top Cover Perforated | 11.00 | 279 | 16.00 | 406 |
| CT66PTFCSS | 6.00 x 6.00 | 152 x 152 | Top Cover Perforated | 11.00 | 279 | 16.00 | 406 |

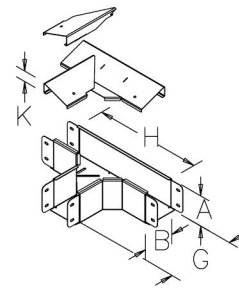90-DEGREE TEE-TOP COVER SLOPED INWARD


89168943

BULLETIN: F23


| Catalog Number | AxB in. | AxB mm | Description | G (in.) | G (mm) | H (in.) | H (mm) | K (in.) | K (mm) |
|----------------|-------------|-----------|-----------------------------|---------|--------|---------|--------|---------|--------|
| CTS33TFCSS | 3.00 x 3.00 | 76 x 76 | Top Cover Sloped | 7.00 | 178 | 11.00 | 279 | 1.06 | 27 |
| CTS44TFCSS | 4.00 x 4.00 | 102 x 102 | Top Cover Sloped | 9.00 | 229 | 14.00 | 356 | 1.42 | 36 |
| CTS46TFCSS | 4.00 x 6.00 | 102 x 152 | Top Cover Sloped | 11.00 | 279 | 16.00 | 406 | 2.16 | 55 |
| CTS66TFCSS | 6.00 x 6.00 | 152 x 152 | Top Cover Sloped | 11.00 | 279 | 16.00 | 406 | 2.16 | 55 |
| CTS33PTFCSS | 3.00 x 3.00 | 76 x 76 | Top Cover Sloped Perforated | 7.00 | 178 | 11.00 | 279 | 1.06 | 27 |
| CTS44PTFCSS | 4.00 x 4.00 | 102 x 102 | Top Cover Sloped Perforated | 9.00 | 229 | 14.00 | 356 | 1.42 | 36 |
| CTS46PTFCSS | 4.00 x 6.00 | 102 x 152 | Top Cover Sloped Perforated | 11.00 | 279 | 16.00 | 406 | 2.16 | 55 |
| CTS66PTFCSS | 6.00 x 6.00 | 152 x 152 | Top Cover Sloped Perforated | 11.00 | 279 | 16.00 | 406 | 2.16 | 55 |

90-DEGREE TEE-TOP COVER SLOPED OUTWARD


Used wherever two 90-degree transitions are required.

BULLETIN: F23


| Catalog Number | AxB in. | AxB mm | K (in.) | K (mm) |
|----------------|-------------|-----------|---------|--------|
| CTS44TFCOSS | 4.00 x 4.00 | 102 x 102 | 1.42 | 36 |
| CTS46TFCOSS | 4.00 x 6.00 | 102 x 152 | 2.16 | 55 |
| CTS66TFCOSS | 6.00 x 6.00 | 152 x 152 | 2.16 | 55 |

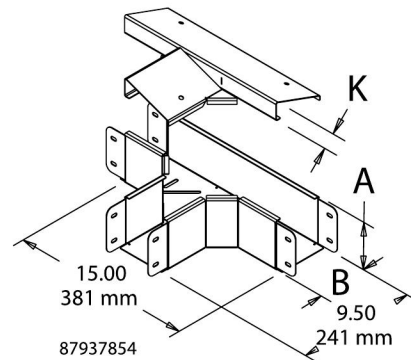
90-DEGREE TEE-INSIDE COVER SLOPED



Used wherever two 90-degree transitions are required.

BULLETIN: F23

| Catalog Number | AxB in. | AxB mm | K (in.) | K (mm) |
|----------------|-------------|-----------|---------|--------|
| CTS44TICSS | 4.00 x 4.00 | 102 x 102 | 1.42 | 36 |
| CTS46TICSS | 4.00 x 6.00 | 102 x 152 | 2.16 | 55 |
| CTS66TICSS | 6.00 x 6.00 | 152 x 152 | 2.16 | 55 |

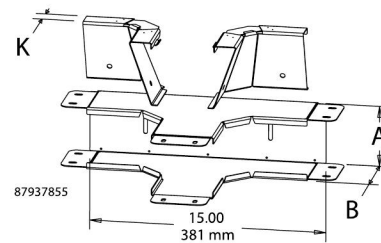

90-DEGREE TEE—OUTSIDE COVER SLOPED

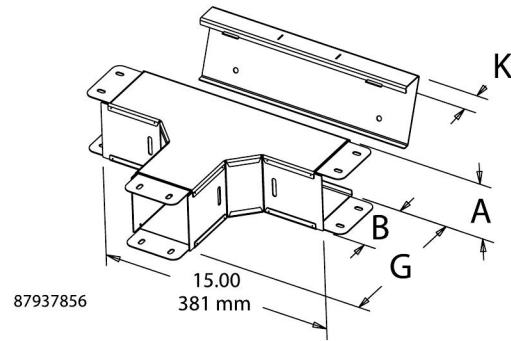


Used wherever two 90-degree transitions are required.

BULLETIN: F23

| Catalog Number | AxB in. | AxB mm | G (in.) | G (mm) | K (in.) | K (mm) |
|----------------|-------------|-----------|---------|--------|---------|--------|
| CTS44TOCSS | 4.00 x 4.00 | 102 x 102 | 9.00 | 229 | 1.42 | 36 |
| CTS46TOCSS | 4.00 x 6.00 | 102 x 152 | 11.00 | 279 | 2.16 | 55 |
| CTS66TOCSS | 6.00 x 6.00 | 152 x 152 | 11.00 | 279 | 2.16 | 55 |

CROSS

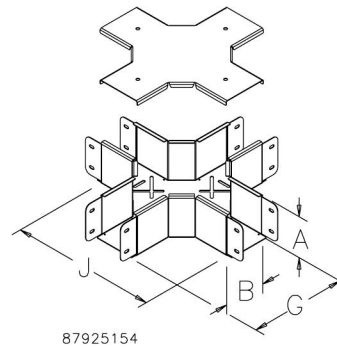

Available with or without perforations. Used where there are four branches.

BULLETIN: F23


| Catalog Number | AxB in. | AxB mm | Description | G (in.) | G (mm) | J (in.) | J (mm) |
|----------------|-------------|-----------|-------------|---------|--------|---------|--------|
| CT22CSS | 2.00 x 2.00 | 51 x 51 | Standard | 6.00 | 152 | 10 | 254 |
| CT33CSS | 3.00 x 3.00 | 76 x 76 | Standard | 7.00 | 178 | 11.00 | 279 |
| CT44CSS | 4.00 x 4.00 | 102 x 102 | Standard | 9.00 | 229 | 14.00 | 356 |
| CT46CSS | 4.00 x 6.00 | 102 x 152 | Standard | 11.00 | 279 | 16.00 | 406 |
| CT66CSS | 6.00 x 6.00 | 152 x 152 | Standard | 11.00 | 279 | 16.00 | 406 |
| CT22PCSS | 2.00 x 2.00 | 51 x 51 | Perforated | 6.00 | 152 | 10.00 | 254 |
| CT33PCSS | 3.00 x 3.00 | 76 x 76 | Perforated | 7.00 | 178 | 11.00 | 279 |
| CT44PCSS | 4.00 x 4.00 | 102 x 102 | Perforated | 9.00 | 229 | 14.00 | 356 |
| CT46PCSS | 4.00 x 6.00 | 102 x 152 | Perforated | 11.00 | 279 | 16.00 | 406 |
| CT66PCSS | 6.00 x 6.00 | 152 x 152 | Perforated | 11.00 | 279 | 16.00 | 406 |

CROSS-SLOPED TOP



Available with or without perforations. Used where there are four branches. Kit includes both left and right sloped covers to create any configuration.

BULLETIN: F23

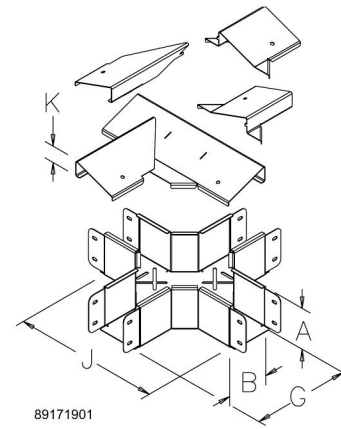

| Catalog Number | AxB in./mm | Description | G in./mm | J in./mm | K in./mm |
|----------------|--------------------------|-----------------------|--------------|--------------|------------|
| CTS33CSS | 3.00 x 3.00 76 x 76 | Sloped Top | 7.00 178 | 11.00 279 | 1.06 27 |
| CT44CSS | 4.00 x 4.00 102 x 102 | Sloped Top | 9.00 229 | 14.00 356 | 1.42 36 |
| CTS46CSS | 4.00 x 6.00 102 x 152 | Sloped Top | 11.00 279 | 16.00 406 | 2.16 55 |
| CTS66CSS | 6.00 x 6.00 152 x 152 | Sloped Top | 11.00 279 | 16.00 406 | 2.16 55 |
| CTS33PCSS | 3.00 x 3.00 76 x 76 | Perforated Sloped Top | 7.00 178 | 11.00 279 | 1.06 27 |
| CTS44PCSS | 4.00 x 4.00 102 x 102 | Perforated Sloped Top | 9.00 229 | 14.00 356 | 1.42 36 |
| CTS46PCSS | 4.00 x 6.00 102 x 152 | Perforated Sloped Top | 11.00 279 | 16.00 406 | 2.16 55 |
| CTS66PCSS | 6.00 x 6.00 152 x 152 | Perforated Sloped Top | 11.00 279 | 16.00 406 | 2.16 55 |


DIVIDER 90-DEGREE TEE



Used to divide a 90-degree tee into two sections.

BULLETIN: F23

| Catalog Number | Fits Cable Tray Size | Description | L (in.) | L (mm) | M (in.) | M (mm) |
|----------------|----------------------|---------------|---------|--------|---------|--------|
| CT33DTFCSS | 3 x 3 | Top Cover | 2.13 | 54 | — | — |
| CT44DTFCSS | 4 x 4 | Top Cover | 3.13 | 79 | — | — |
| CT46DTFCSS | 4 x 6 | Top Cover | 3.13 | 79 | — | — |
| CT66DTFCSS | 6 x 6 | Top Cover | 5.13 | 130 | — | — |
| CT33DTICSS | 3 x 3 | Inside Cover | 2.13 | 54 | 1.75 | 45 |
| CT44DTICSS | 4 x 4 | Inside Cover | 3.13 | 79 | 2.75 | 70 |
| CT66DTICSS | 6 x 6 | Inside Cover | 5.13 | 130 | 4.75 | 121 |
| CT33DTCSS | 3 x 3 | Outside Cover | 2.13 | 54 | 2.58 | 66 |
| CT44DTCSS | 4 x 4 | Outside Cover | 3.13 | 79 | 3.70 | 94 |
| CT66DTCSS | 6 x 6 | Outside Cover | 5.13 | 130 | 5.70 | 145 |

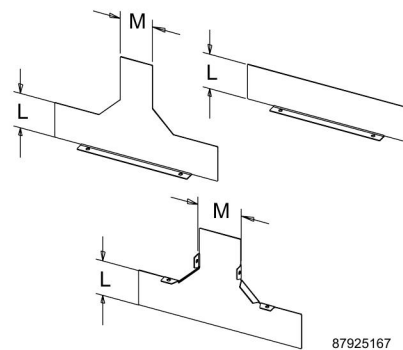


DIVIDER 90-DEGREE ELBOW



Used to divide a 90-degree elbow into two sections.

BULLETIN: F23

| Catalog Number | Description | Fits Cable | | |
|----------------|---------------|--------------|---------|--------|
| | | Tray Size | L (in.) | L (mm) |
| CT33DEFC90SS | Top Cover | 3 x 3 | 2.13 | 54 |
| CT44DEFC90SS | Top Cover | 4 x 4 | 3.13 | 79 |
| CT46DEFC90SS | Top Cover | 4 x 6 | 3.13 | 79 |
| CT66DEFC90SS | Top Cover | 6 x 6 | 5.13 | 130 |
| CT33DEIC90SS | Inside Cover | 3 x 3 | 2.13 | 54 |
| CT44DEIC90SS | Inside Cover | 4 x 4, 4 x 6 | 3.13 | 79 |
| CT66DEIC90SS | Inside Cover | 6 x 6 | 5.13 | 130 |
| CT33DEOC90SS | Outside Cover | 3 x 3 | 2.13 | 54 |
| CT44DEOC90SS | Outside Cover | 4 x 4, 4 x 6 | 3.13 | 79 |
| CT66DEOC90SS | Outside Cover | 6 x 6 | 5.13 | 130 |

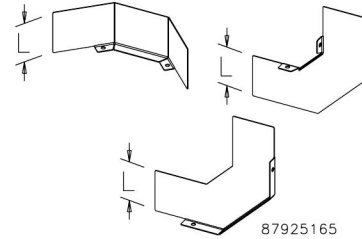


DIVIDER 45-DEGREE ELBOW



Used to divide a 45-degree elbow into two sections.

BULLETIN: F23

| Catalog Number | Description | Fits Cable | | |
|----------------|---------------|--------------|---------|--------|
| | | Tray Size | L (in.) | L (mm) |
| CT33DEFC45SS | Top Cover | 3 x 3 | 2.13 | 54 |
| CT44DEFC45SS | Top Cover | 4 x 4 | 3.13 | 79 |
| CT46DEFC45SS | Top Cover | 4 x 6 | 3.13 | 79 |
| CT66DEFC45SS | Top Cover | 6 x 6 | 5.13 | 130 |
| CT33DEIC45SS | Inside Cover | 3 x 3 | 2.13 | 54 |
| CT44DEIC45SS | Inside Cover | 4 x 4, 4 x 6 | 3.13 | 79 |
| CT66DEIC45SS | Inside Cover | 6 x 6 | 5.13 | 130 |
| CT33DEOC45SS | Outside Cover | 3 x 3 | 2.13 | 54 |
| CT44DEOC45SS | Outside Cover | 4 x 4, 4 x 6 | 3.13 | 79 |
| CT66DEOC45SS | Outside Cover | 6 x 6 | 5.13 | 130 |

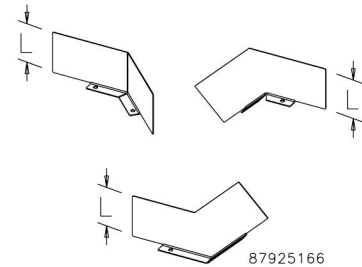


U-CONNECTOR



Used to connect two straight sections.

BULLETIN: F23

| Catalog Number | AxB in./mm |
|----------------|--------------------------|
| CT22UCSS | 2.00 x 2.00 51 x 51 |
| CT33UCSS | 3.00 x 3.00 76 x 76 |
| CT44UCSS | 4.00 x 4.00 102 x 102 |
| CT46UCSS | 4.00 x 6.00 102 x 152 |
| CT66UCSS | 6.00 x 6.00 152 x 152 |




CLOSURE PLATE



Closes the end of a cable tray section or run.

BULLETIN: F23

| Catalog Number | AxB in. | AxB mm | Description |
|----------------|-------------|-----------|-------------|
| CT22CPSS | 2.00 x 2.00 | 51 x 51 | Standard |
| CT33CPSS | 3.00 x 3.00 | 76 x 76 | Standard |
| CT44CPSS | 4.00 x 4.00 | 102 x 102 | Standard |
| CT46CPSS | 4.00 x 6.00 | 102 x 152 | Standard |
| CT66CPSS | 6.00 x 6.00 | 152 x 152 | Standard |



87925156

CLOSURE PLATE—SLOPED TOP




Closes the end of a cable tray section or run (left slope shown).

BULLETIN: F23

| Catalog Number | AxB in. | AxB mm | Description | K (in.) | K (mm) |
|----------------|-------------|---------|--------------|---------|--------|
| CTS33CPRSS | 3.00 x 3.00 | 76 x 76 | Sloped Right | 1.06 | 27 |
| CTS33CPLSS | 3.00 x 3.00 | 76 x 76 | Sloped Left | 1.06 | 27 |

| Catalog Number | AxB in. | AxB mm | Description | K (in.) | K (mm) |
|----------------|-------------|-----------|--------------|---------|--------|
| CTS44CPRSS | 4.00 x 4.00 | 102 x 102 | Sloped Right | 1.42 | 36 |
| CTS44CPLSS | 4.00 x 4.00 | 102 x 102 | Sloped Left | 1.42 | 36 |
| CTS46CPRSS | 4.00 x 6.00 | 102 x 152 | Sloped Right | 2.16 | 55 |
| CTS46CPLSS | 4.00 x 6.00 | 102 x 152 | Sloped Left | 2.16 | 55 |
| CTS66CPRSS | 6.00 x 6.00 | 152 x 152 | Sloped Right | 2.16 | 55 |
| CTS66CPLSS | 6.00 x 6.00 | 152 x 152 | Sloped Left | 2.16 | 55 |



89171974


ENCLOSURE ADAPTER



Allows the cable tray to be securely connected to an enclosure.

BULLETIN: F23

| Catalog Number | AxB in./mm |
|----------------|--------------------------|
| CT22AESS | 2.00 x 2.00 51 x 51 |
| CT33AESS | 3.00 x 3.00 76 x 76 |
| CT44AESS | 4.00 x 4.00 102 x 102 |
| CT46AESS | 4.00 x 6.00 102 x 152 |
| CT66AESS | 6.00 x 6.00 152 x 152 |




87925157

STRAIGHT SECTION SPLICE



Used to connect two fittings with tabs.
BULLETIN: F23

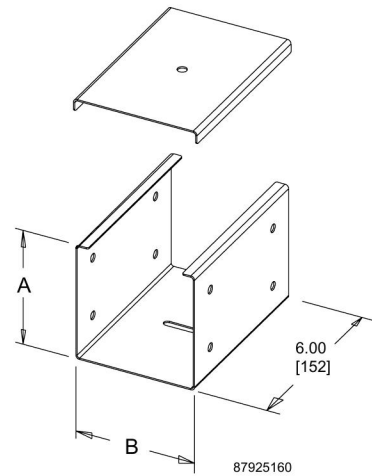


| Catalog Number | AxB in. | AxB mm | Description |
|----------------|-------------|-----------|-------------|
| CT22SPSS | 2.00 x 2.00 | 51 x 51 | Standard |
| CT33SPSS | 3.00 x 3.00 | 76 x 76 | Standard |
| CT44SPSS | 4.00 x 4.00 | 102 x 102 | Standard |
| CT46SPSS | 4.00 x 6.00 | 102 x 152 | Standard |
| CT66SPSS | 6.00 x 6.00 | 152 x 152 | Standard |
| CT22PSPSS | 2.00 x 2.00 | 51 x 51 | Perforated |
| CT33PSPSS | 3.00 x 3.00 | 76 x 76 | Perforated |
| CT44PSPSS | 4.00 x 4.00 | 102 x 102 | Perforated |
| CT46PSPSS | 4.00 x 6.00 | 102 x 152 | Perforated |
| CT66PSPSS | 6.00 x 6.00 | 152 x 152 | Perforated |

STRAIGHT SECTION SPLICE—SLOPED TOP




Used to connect two fittings with tabs.
BULLETIN: F23

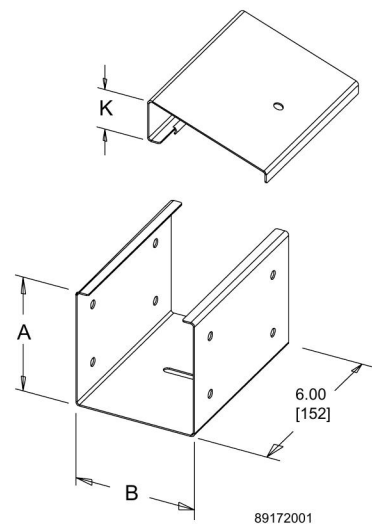


| Catalog Number | AxB in. | AxB mm | Description | K (in.) | K (mm) |
|----------------|-------------|-----------|------------------------|---------|--------|
| CTS33SPSS | 3.00 x 3.00 | 76 x 76 | Sloped Top | 1.06 | 27 |
| CTS44SPSS | 4.00 x 4.00 | 102 x 102 | Sloped Top | 1.42 | 36 |
| CTS46SPSS | 4.00 x 6.00 | 102 x 152 | Sloped Top | 2.16 | 55 |
| CTS66SPSS | 6.00 x 6.00 | 152 x 152 | Sloped Top | 2.16 | 55 |
| CTS33PSPSS | 3.00 x 3.00 | 76 x 76 | Sloped Top, Perforated | 1.06 | 27 |
| CTS44PSPSS | 4.00 x 4.00 | 102 x 102 | Sloped Top, Perforated | 1.42 | 36 |
| CTS46PSPSS | 4.00 x 6.00 | 102 x 152 | Sloped Top, Perforated | 2.16 | 55 |
| CTS66PSPSS | 6.00 x 6.00 | 152 x 152 | Sloped Top, Perforated | 2.16 | 55 |

REDUCER


Used to reduce to a smaller size cable tray.

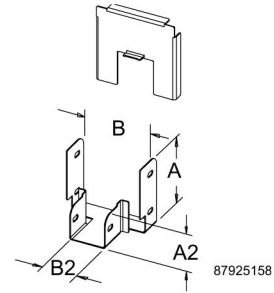BULLETIN: F23


| Catalog Number | AxB in. | AxB mm | Description | A2 (in.) | A2 (mm) | B2 (in.) | B2 (mm) |
|----------------|-------------|-----------|----------------------|----------|---------|----------|---------|
| CT3322RSS | 3.00 x 3.00 | 76 x 76 | 3 x 3 2 x 2 Standard | 2.00 | 51 | 2.00 | 51 |
| CT4433RSS | 4.00 x 4.00 | 102 x 102 | 4 x 4 3 x 3 Standard | 3.00 | 76 | 3.00 | 76 |
| CT4422RSS | 4.00 x 4.00 | 102 x 102 | 4 x 4 2 x 2 Standard | 2.00 | 51 | 2.00 | 51 |
| CT4644RSS | 4.00 x 6.00 | 102 x 152 | 4 x 6 4 x 4 Standard | 4.00 | 102 | 4.00 | 102 |
| CT4633RSS | 4.00 x 6.00 | 102 x 152 | 4 x 6 3 x 3 Standard | 3.00 | 76 | 3.00 | 76 |
| CT6622RSS | 6.00 x 6.00 | 152 x 152 | 6 x 6 2 x 2 Standard | 2.00 | 51 | 2.00 | 51 |
| CT6646RSS | 6.00 x 6.00 | 152 x 152 | 6 x 6 4 x 6 Standard | 4.00 | 102 | 6.00 | 152 |
| CT6644RSS | 6.00 x 6.00 | 152 x 152 | 6 x 6 4 x 4 Standard | 4.00 | 102 | 4.00 | 102 |
| CT6633RSS | 6.00 x 6.00 | 152 x 152 | 6 x 6 3 x 3 Standard | 3.00 | 76 | 3.00 | 76 |

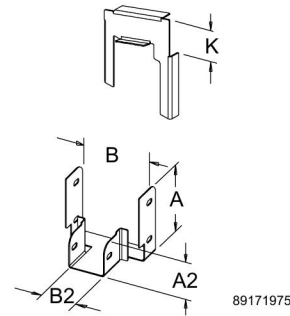REDUCER—SLOPED TOP


Used to reduce to a smaller size cable tray (right slope shown).

BULLETIN: F23

| Catalog Number | AxB in. | AxB mm | Description | A2 (in.) | A2 (mm) | B2 (in.) | B2 (mm) | K (in.) | K (mm) |
|----------------|-------------|-----------|----------------------|----------|---------|----------|---------|---------|--------|
| CTS4433RRSS | 4.00 x 4.00 | 102 x 102 | 4x4 3x3 Sloped Right | 3.00 | 76 | 3.00 | 76 | 1.42 | 36 |
| CTS4433RLSS | 4.00 x 4.00 | 102 x 102 | 4x4 3x3 Sloped Left | 3.00 | 76 | 3.00 | 76 | 1.42 | 36 |
| CTS4633RRSS | 4.00 x 6.00 | 102 x 152 | 4x6 3x3 Sloped Right | 3.00 | 76 | 3.00 | 76 | 2.16 | 55 |
| CTS4633RLSS | 4.00 x 6.00 | 102 x 152 | 4x6 3x3 Sloped Left | 3.00 | 76 | 3.00 | 76 | 2.16 | 55 |
| CTS4644RRSS | 4.00 x 6.00 | 102 x 152 | 4x6 4x4 Sloped Right | 4.00 | 102 | 4.00 | 102 | 2.16 | 55 |
| CTS4644RLSS | 4.00 x 6.00 | 102 x 152 | 4x6 4x4 Sloped Left | 4.00 | 102 | 4.00 | 102 | 2.16 | 55 |
| CTS6633RRSS | 6.00 x 6.00 | 152 x 152 | 6x6 3x3 Sloped Right | 3.00 | 76 | 3.00 | 76 | 2.16 | 55 |
| CTS6633RLSS | 6.00 x 6.00 | 152 x 152 | 6x6 3x3 Sloped Left | 3.00 | 76 | 3.00 | 76 | 2.16 | 55 |
| CTS6644RRSS | 6.00 x 6.00 | 152 x 152 | 6x6 4x4 Sloped Right | 4.00 | 102 | 4.00 | 102 | 2.16 | 55 |
| CTS6644RLSS | 6.00 x 6.00 | 152 x 152 | 6x6 4x4 Sloped Left | 4.00 | 102 | 4.00 | 102 | 2.16 | 55 |
| CTS6646RRSS | 6.00 x 6.00 | 152 x 152 | 6x6 4x6 Sloped Right | 4.00 | 102 | 4.00 | 102 | 2.16 | 55 |
| CTS6646RLSS | 6.00 x 6.00 | 152 x 152 | 6x6 4x6 Sloped Left | 4.00 | 102 | 4.00 | 102 | 2.16 | 55 |


CABLE EXIT COVER



Covers cables that exit the side of the cable tray. Will cover a keyhole or slot used to pass the cable through.

BULLETIN: F23

| Catalog Number |
|----------------|
| CT2233CEC |
| CT4466CEC |



87925159


DIVIDER STRAIGHT SECTION SPLICE



Used to divide a straight section splice into two sections.

BULLETIN: F23

| Catalog Number | H in./mm | L in./mm | Fits Cable Tray Size |
|----------------|-------------|-------------|----------------------|
| CT33DSPSS | 2.13 54 | 6.00 152 | 3 x 3 |
| CT44DSPSS | 3.13 79 | 6.00 152 | 4 x 4, 4 x 6 |
| CT66DSPSS | 5.13 130 | 6.00 152 | 6 x 6 |

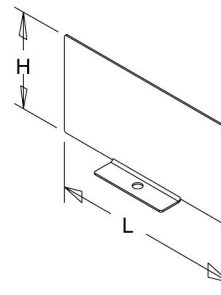

87925164


TRANSITION COVER



Transitions from a sloped to standard cable tray. Available with right- and left-hand slope. Will fit the Splice (order separately) or anywhere on a straight section (transition cover sloped to flat left-hand shown in drawing).


BULLETIN: F23

| Catalog Number | Description | Fits Cable Tray Size | B in./mm | K in./mm |
|----------------|--|----------------------|-------------|------------|
| CTS33TCRSS | Transition Cover Sloped to Flat Right Hand | 3 x 3 | 3.00 76 | 1.06 27 |
| CTS33TCLSS | Transition Cover Sloped to Flat Left Hand | 3 x 3 | 3.00 76 | 1.06 27 |
| CTS44TCRSS | Transition Cover Sloped to Flat Right Hand | 4 x 4 | 4.00 102 | 1.42 36 |
| CTS44TCLSS | Transition Cover Sloped to Flat Left Hand | 4 x 4 | 4.00 102 | 1.42 36 |
| CTS46TCRSS | Transition Cover Sloped to Flat Right Hand | 4 x 6, 6 x 6 | 6.00 152 | 2.16 55 |
| CTS46TCLSS | Transition Cover Sloped to Flat Left Hand | 4 x 6, 6 x 6 | 6.00 152 | 2.16 55 |

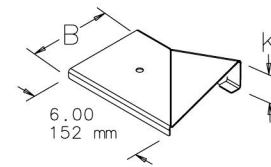

87925161


SIDE COUPLING



Used to connect straight sections or fittings to the side of a cable tray run. A cutout will be required in the side of the cable tray.

BULLETIN: F23

| Catalog Number | AxB in. | AxB mm |
|----------------|-------------|-----------|
| CT22SCSS | 2.00 x 2.00 | 51 x 51 |
| CT33SCSS | 3.00 x 3.00 | 76 x 76 |
| CT44SCSS | 4.00 x 4.00 | 102 x 102 |
| CT46SCSS | 4.00 x 6.00 | 102 x 152 |
| CT66SCSS | 6.00 x 6.00 | 152 x 152 |



87925162

FASTENER PACKAGE

1/4-20 stainless steel fasteners used to connect cable tray components.

BULLETIN: F23


| Catalog Number | Screws | Nuts |
|----------------|--------|------|
| CT1420SS | 100 | 100 |

HANGER BRACKET

Used to support a cable tray run. 20 per package.

BULLETIN: F23

| Catalog Number | Fits Cable Tray Size | M in./mm |
|----------------|----------------------|-------------|
| CT22HB | 2x2 | 3.58 91 |
| CT33HB | 3x3 | 4.58 116 |
| CT44HB | 4x4 | 5.58 142 |
| CT66HB | 6x6 | 7.58 193 |

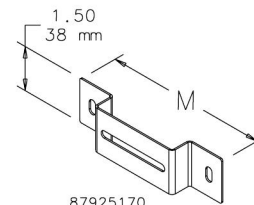

87925170


L-BRACKET

Used to support a cable tray run. Can be mounted to a vertical UNISTRUT® channel. 20 per package.

UNISTRUT is a registered trademark of Unistrut Corporation.

BULLETIN: F23

| Catalog Number | Fits Cable Tray Size | N in./mm | P in./mm |
|----------------|----------------------|-------------|-------------|
| CT22LB | 2x2 | 3.00 76 | 3.64 92 |
| CT33LB | 3x3 | 4.00 102 | 4.64 118 |
| CT44LB | 4x4 | 5.00 127 | 5.64 143 |
| CT66LB | 6x6 | 7.64 194 | 7.64 194 |

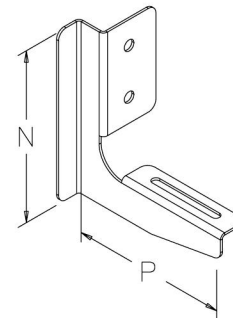


87925169

WALL BRACKET

Used to support a cable tray run. 20 per package.

BULLETIN: F23

| Catalog Number | Fits Cable Tray Size | R in./mm | S in./mm |
|----------------|----------------------|-------------|-------------|
| CT22WB | 2 x | 1.55 39 | 2.25 57 |
| CT33WB | 3 x 3 | 2.55 65 | 3.25 83 |
| CT44WB | 4 x 4 | 3.55 90 | 4.25 108 |
| CT66WB | 6 x 6 | 5.55 141 | 6.25 159 |



LATCH HARDWARE KITS

BULLETIN: F23

| Catalog Number | Use with Cable Tray Size |
|----------------|--------------------------|
| CTLCHSS | 2 x 2, 4 x 6, 6 x 6 |
| CTLCH3SS | 3 x 3 |
| CTLCH4SS | 4 x 4 |
| CTSLCHSS | Sloped |