


ProLine

PROLINE RACK AND GRID / RAIL SYSTEM

GRID SYSTEM



Grid strap installation (from side to side).



Grid strap installation (vertical and horizontal grid straps)



Full-height vertical grid strap

A Grid System provides a flexible extension to the internal mounting system already furnished with the ProLine frame. The Grid System allows flexible mounting capabilities in height, width and depth. Accessories or equipment can be attached directly to the Grid System using either cage nuts or front-loading cage nuts.



GRID STRAPS



Grid Straps are 2,0 mm plated steel. They are provided with specially designed rectangular holes to allow the use of cage nuts or front-loading cage nuts. Mounting holes are provided on 25 mm centers. Grid Straps are available with either 1 row or 3 rows of holes and are furnished in pairs. Mounting hardware to attach Grid Straps to the frame or to other Grid Straps is included.

- Can be mounted front-to-back horizontally across the bottom or sides of the ProLine frame
- Can be mounted left-to-right horizontally between front-to-back pairs or from the sides of the ProLine frame
- Can be mounted vertically between horizontally mounted Grid Straps
- Package includes set of two grid straps.


| Item number | Hole Pattern | L [mm] | Fits Frame Depth [mm] | Fits Frame Width [mm] |
|-------------|--------------|--------|-----------------------|-----------------------|
| PGH1S4 | One Row | 242 | 400 | — |
| PGH1S5 | One Row | 342 | 500 | — |
| PGH1S6 | One Row | 442 | 600 | — |
| PGH1S7 | One Row | 542 | — | 600 |
| PGH1S8 | One Row | 642 | 800 | — |
| PGH1S9 | One Row | 742 | — | 800 |
| PGH1S11 | One Row | 942 | — | 1000 |
| PGH1S13 | One Row | 1142 | — | 1200 |
| PGH3S4 | Three Row | 242 | 400 | — |
| PGH3S5 | Three Row | 342 | 500 | — |
| PGH3S6 | Three Row | 442 | 600 | — |
| PGH3S7 | Three Row | 542 | — | 600 |
| PGH3S8 | Three Row | 642 | 800 | — |
| PGH3S9 | Three Row | 742 | — | 800 |
| PGH3S10 | Three Row | 842 | 1000 | — |
| PGH3S11 | Three Row | 942 | — | 1000 |
| PGH3S12 | Three Row | 1242 | 1200 | — |
| PGH3S13 | Three Row | 1142 | — | 1200 |

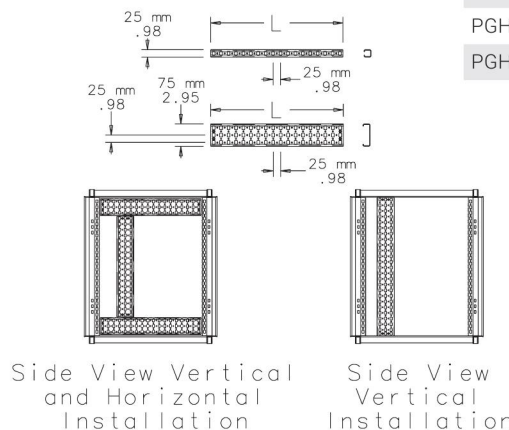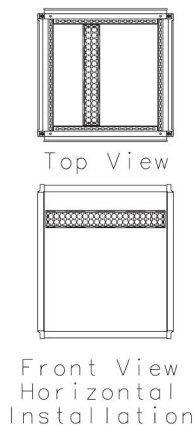

87415121

ProLine Rack and Grid/Rail System

FULL-HEIGHT VERTICAL GRID STRAPS

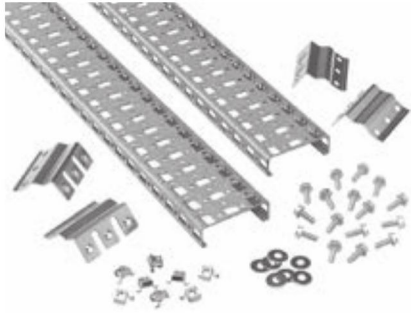

Grid Straps provide a vertical extension of the frame holes in the sides of the ProLine frame. They are sold in pairs with mounting hardware included. Vertical Grid Straps are 2,0 mm plated steel. Three-row 25 mm hole spacing allows the use of cage nuts or front-loading cage nuts. Package includes set of two grid straps.

| Item number | L [mm] | Fits Frame Height [mm] |
|-------------|--------|------------------------|
| PGH3S14V | 1295 | 1400 |
| PGH3S16V | 1495 | 1600 |
| PGH3S18V | 1695 | 1800 |
| PGH3S20V | 1895 | 2000 |
| PGH3S22V | 2095 | 2200 |




19-IN. RACK ANGLES



Square-Hole Rack Angles are 2,0 mm plated steel designed to accept metric or English cage nuts. 19-in. Rack Angles are fixed directly into a 600 mm wide enclosure frame. To mount 19-in. Rack Angles in 800 mm wide frames, use frame reducing brackets. Package includes set of two 19-in. rack angles.


| Item number | Hole | h [mm] | Fits Frame [mm] | Rack Units |
|-------------|--------|--------|-----------------|------------|
| PRA198TH | Square | 712 | 800 | 16 |
| PRA1914TH | Square | 1290 | 1400 | 29 |
| PRA1916TH | Square | 1467 | 1600 | 33 |
| PRA1918TH | Square | 1690 | 1800 | 38 |
| PRA1920TH | Square | 1867 | 2000 | 42 |
| PRA1922TH | Square | 2090 | 2200 | 47 |

Vertical holes spaced in 44.5 mm increments.

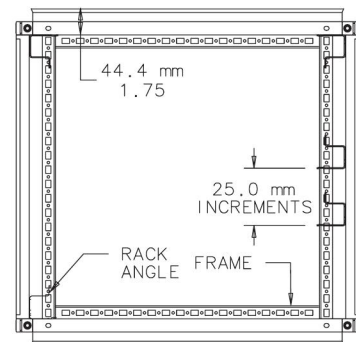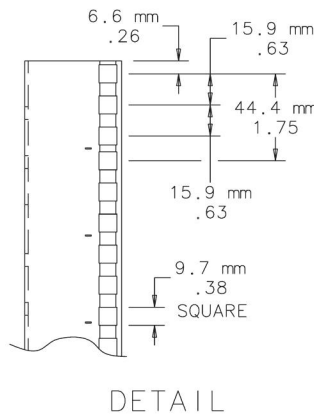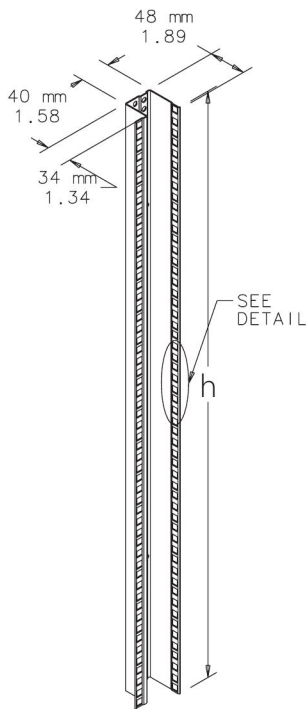

87932702

FRAME-REDUCING BRACKETS FOR FRAMES OR GRID STRAPS

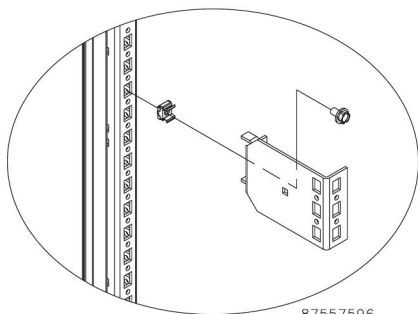

87557596

Frame-Reducing Brackets mount directly to 800 mm wide ProLine frames or to grid straps. Converts wider frames to 600 mm wide, allowing 19-in. rack angles to fit. Can be used to left- or right-justify the rack-mounted equipment. Furnished in sets of four. 2,0 mm thick plated steel. Mounting hardware is included. Package includes set of four brackets.

| Item number | Reduces Frame Width | w [mm] | w (in.) | Converts Frame Width |
|-------------|---------------------|--------|---------|------------------------------------|
| PRB100 | 100 | 100 | 3.94 | From 800 to 600 From 800 to 700 |


ProLine Rack and Grid/Rail System

PARTIAL SWING-OUT RACK FRAME

This 19-in. Rack Frame is used when a smaller, medium-duty swing-out frame is desired. Light-weight rack equipment fits nicely into this 800 mm tall swing-out frame providing 90 degrees of rotation and increased accessibility.

- Side hinge brackets are used to mount the swing frame, allowing free access above and below the swing frame
- Used with any height enclosure and hinged on the right or left
- Maximum equipment load is 45.4 kg (100 lb.)
- Furnished with hinges, two quarter-turn latches and mounting hardware
- RAL 7035 textured, gray finish
- Complies with ANSI/EIA RS-310-D rack mounting standards

1. *Swing-Out Rack Frame assemblies are supplied with mounting supports.*
2. *Swing-out mounting supports mount to inside of frame at any vertical location.*
3. *Mounting supports and swing-out frame can be located deeper into frame using grid system straps. Deeper mounting affects the degree of opening of swing-out frame*

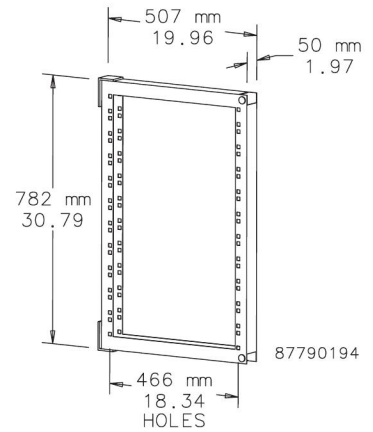

| Item number | Fits Frame Width mm | Rack Units |
|-------------|---------------------|------------|
| PSF6 | 600 | 16 |
| PSF8 | 800 | 16 |

HEAVY-DUTY SWING-OUT RACK FRAME

- Allows 19-in. rack equipment to pivot out of the enclosure frame for better accessibility; the frames mount on hinges capable of 120-degree rotation; hinges that provide 170-degree rotation are optional
- Spring-loaded pivot post makes installation easy
- Rack Frames are available for 600 and 800 mm wide enclosure frames
- Mounting supports for an 800 mm wide enclosure frame permit you to either center the rack-mounting frame or position it right or left; the frame can also pivot from either the left or the right for maximum flexibility
- Mounting supports can be assembled to the top and bottom of the frame for full-height rack-mounting frames; smaller rack-mounting frames can be mounted to the vertical frame members or to the grid straps; order separately

- Furnished with hinges, two quarter-turn latches and mounting hardware RAL 7035 textured gray finish
- Complies with ANSI/EIA RS-310-D rack-mounting standards
- Maximum equipment load is 136 kg (300 lb.)
- Mounting holes accommodate either English or metric cage nuts, which are ordered separately


1. *Swing-Out Rack Frame assemblies are supplied with mounting supports. Swing-Out Rack Frames can also be installed in right, left or both bays of 1200 mm wide frames using center uprights.*
2. *Swing-out mounting supports mount to inside of frame at any vertical location.*
3. *Mounting supports and swing-out frame can be located deeper into frame using grid system straps. Deeper mounting affects the degree of opening of swing-out frame.*

| Item number | Fits Frame Height [mm] | Fits Frame Width [mm] | h [mm] | w [mm] | Rack Units |
|-------------|------------------------|-----------------------|--------|--------|------------|
| PSF146 | 1400 or taller | 600 | 1215 | 496 | 25 |
| PSF148 | 1400 or taller | 800 | 1215 | 496 | 25 |
| PSF168 | 1600 or taller | 800 | 1438 | 496 | 30 |
| PSF186 | 1800 or taller | 600 | 1615 | 496 | 34 |
| PSF188 | 1800 or taller | 800 | 1615 | 496 | 34 |
| PSF206 | 2000 or taller | 600 | 1838 | 496 | 39 |
| PSF208 | 2000 or taller | 800 | 1838 | 496 | 39 |
| PSF226 | 2200 tall | 600 | 2015 | 496 | 43 |
| PSF228 | 2200 tall | 800 | 2015 | 496 | 43 |


ProLine Rack and Grid/Rail System

HEAVY-DUTY SWING-OUT RACK FRAME



Standard 120° Frame Hinging



120° Mounting Position

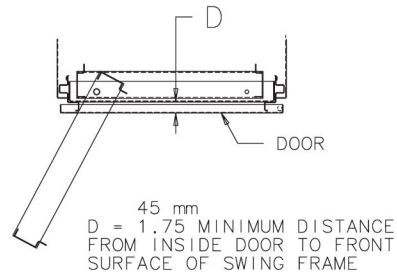


Maximum Installation Depth for 600 mm Wide Enclosures

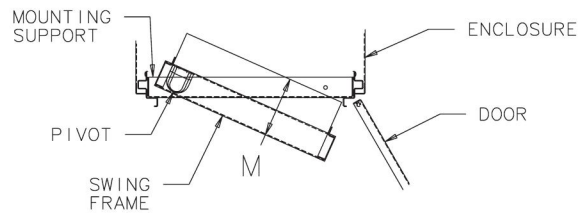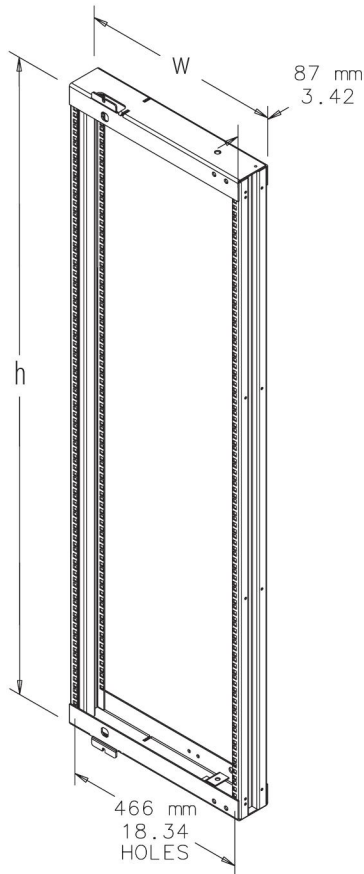


M = Max Installation Depth = 216 mm (8.50 in.)

Maximum Installation Depth for 800 mm Wide Enclosures

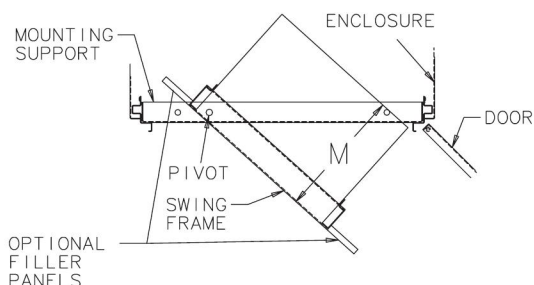

Center Position

M = Max Installation Depth = 394 mm (15.50 in.)

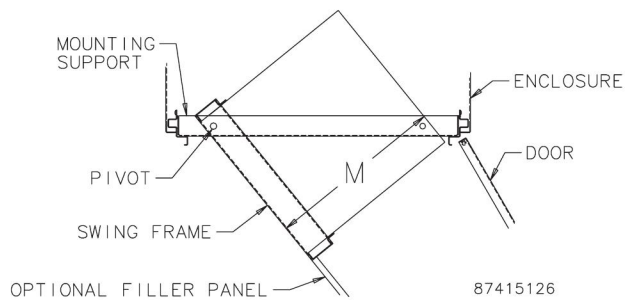

Side Position

M = Max Installation Depth = 514 mm (20.25 in.)

ProLine Rack and Grid/Rail System



170-DEGREE HINGE KIT

Use this kit in conjunction with the Heavy-Duty Swing-Out Frame. It provides increased accessibility to the back of rack equipment.


| Item number | Length [mm] |
|-------------|------------------|
| PSF170K | 600, 700 and 800 |



Optional 170° Frame Hinging

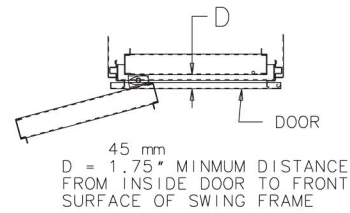


Maximum Installation Depth for 600 mm Wide Enclosures

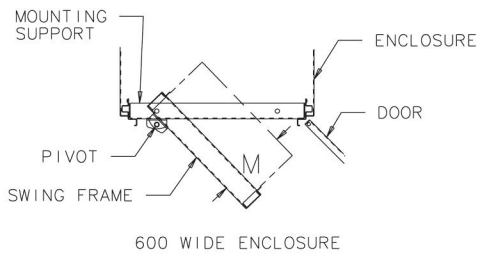


M = Max. Installation Depth = 165 mm (6.50 in.)

Maximum Installation Depth for 800mm Wide Enclosures

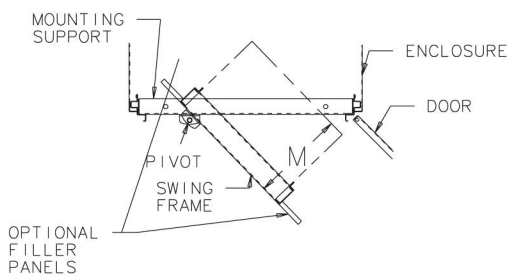


M = Max. Installation Depth = 349 mm (13.75 in.)

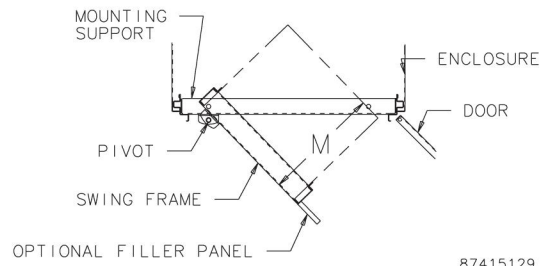

M = Max. Installation Depth = 488 mm (19.25 in.)

STOP ARM KIT




Used with Heavy-Duty Swing-Out Rack Frames to lock the frame in the open position. Consists of stop arm and mounting hardware.

| Item number | Length [mm] |
|-------------|-------------------------|
| PSAK120 | 120-degree Stop Arm Kit |
| PSAK170 | 170-degree Stop Arm Kit |

ProLine Rack and Grid/Rail System

FILLER PANEL KIT

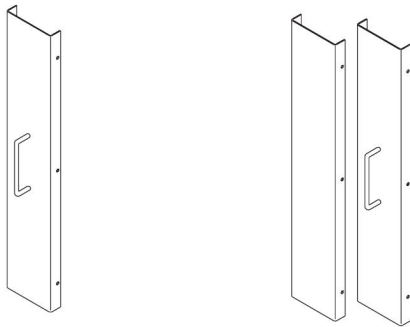

87415128

Used when mounting Heavy-Duty Swing-Out Rack Frames in 800 mm wide frames. The Filler Panel occupies the extra space between the frame and the swing frame. Includes a handle and all the hardware for mounting to the Swing-Out Rack Frame.

| Item number | Swing Frame Height | Enclosure Width | Mounting |
|-------------|--------------------|-----------------|---------------|
| PFPK188LR | 1800 | 800 | Left or Right |
| PFPK188C | 1800 | 800 | Center |
| PFPK208LR | 2000 | 800 | Left or Right |
| PFPK208C | 2000 | 800 | Center |
| PFPK228LR | 2200 | 800 | Left or Right |


GUIDES



Equipment Guides help support rack-mounted equipment during installation. Guides mount between two pairs of rack angles. Slotted holes are provided for vertical or lateral adjustment. Guides have plated finish. Mounting hardware included. Can be installed on 19-in. rack angles. Package includes set of two guides.


Rack accessories that are shorter than the enclosure depth can be mounted to rack angles or frame accessory brackets attached to grid straps. Order these items separately.

| Item number | L [mm] | Frame Depth [mm] |
|-------------|--------|------------------|
| PG4 | 217 | 400 |
| PG5 | 317 | 500 |
| PG6 | 417 | 600 |
| PG8 | 617 | 800 |

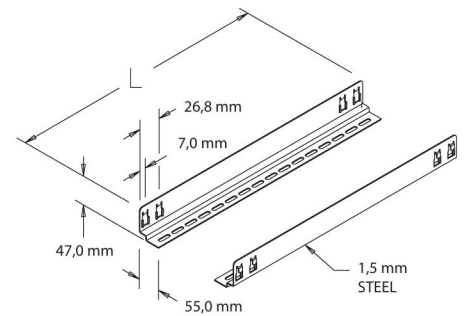

87415141

RACK PANEL



Rack Panels are 2,5 mm steel and finished in RAL 7035 textured light-gray polyester powder paint. All panels are flat with oblong holes positioned at EIA standard spacing.

Mounting hardware is sold separately.

| Item number | Rack Angle Size | Rack Units |
|-------------|-----------------|------------|
| P19RP1UP | 19 in | 1 |
| P19RP2UP | 19 in. | 2 |
| P19RP3UP | 19 in. | 3 |
| P19RP4UP | 19 in. | 4 |



Our powerful portfolio of brands:

CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER

©2019 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without notice.

HOFFMAN-SLSH-SEL00324-ProLineRackRail-EN-1906

[nVent.com/HOFFMAN](https://www.nVent.com/HOFFMAN) | 6



RSPSupply - 1-888-532-2706 - <https://www.RSPSupply.com>
See the product details here