ENERGY AND AUTOMATION


QUICK CONNECT SURGE SUPPRESSOR FOR BG... SERIES MINI-CONTACTORS, ≤48VAC (RESISTOR-CAPACITOR)




Contact characteristics

Contact characteristics			
Tightening torque for terminals			
	min	lbin	9
	max	lbin	9
Tightening torque for coil terminal			
	min	lbin	9
	max	lbin	9

Dimensions [mm (in)]

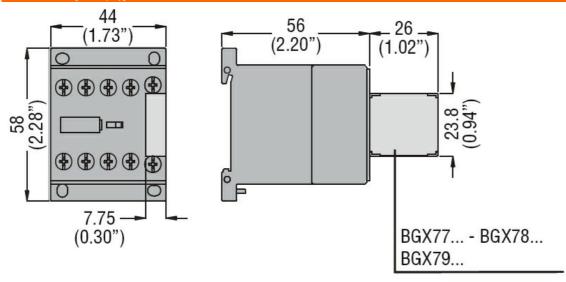

Wiring diagrams

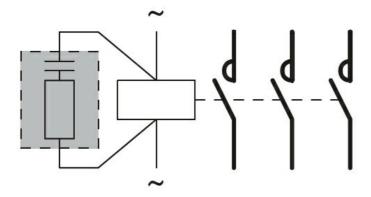

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

IEC/EN 60947-1

UL 60947-1

Certificates

cULus

EAC

ETIM classification



11BGX79048

QUICK CONNECT SURGE SUPPRESSOR FOR BG... SERIES MINI-CONTACTORS, \leq 48VAC (RESISTOR-CAPACITOR)

ETIM 8.0

EC002565 -Filter circuit coil for low-voltage