



Product designation				Time relay
Product type designation				L48TPB
<b>General characteristics</b>				
Description				On delay time relay, multiscale and multivoltage, plug-in version
Function				On delay
<b>Supply circuit</b>				
Rated auxiliary supply voltage Us				220...240VAC
Rated auxiliary supply voltage Us AC		min	VAC	220
		Max	VAC	240
Rated frequency			Hz	50/60
Operating voltage range				0.85...1.1 Us
Maximum power consumption / dissipation			W	6VA
Immunity time for microbreakings			ms	≤40
<b>Timing circuit</b>				
Time setting range				0.05s...10min
Setting accuracy			%	±5
Repeat accuracy			%	±0.5
Influence of voltage variation			%	±0.5
Resetting time		During timing	ms	≥100
		Elapsed time	ms	≥65
<b>Relay outputs</b>				
Number of relays			Nr.	2
Contact arrangement				2 delayed C/O or 1 instantaneous C/O + 1 delayed C/O
Maximum switching voltage			VAC	250
IEC Conventional free air thermal current Ith			A	5
UL/CSA and IEC/EN 60947-5-1 designation				B300
<b>Insulation (input-output)</b>				
Rated insulation voltage Ui			V	250
Power frequency withstand voltage			kV	2
<b>Operations</b>				
Mechanical life			cycles	30000000
Electrical life (with rated load)			cycles	100000
<b>Ambient conditions</b>				
Temperature				
Operating temperature		min	°C	-10
		max	°C	+60


Storage temperature

min	°C	-30
max	°C	+80


**Housing**

Material	Self-extinguishing polyamide
Mounting	Plug-in housing with 8-pin socket
Degree of protection	IP40 on front, IP20 terminals
Dimensions (W x H x D)	mm 48 x 48 x 90
Weight	g 124

**Dimensions [mm (in)]**

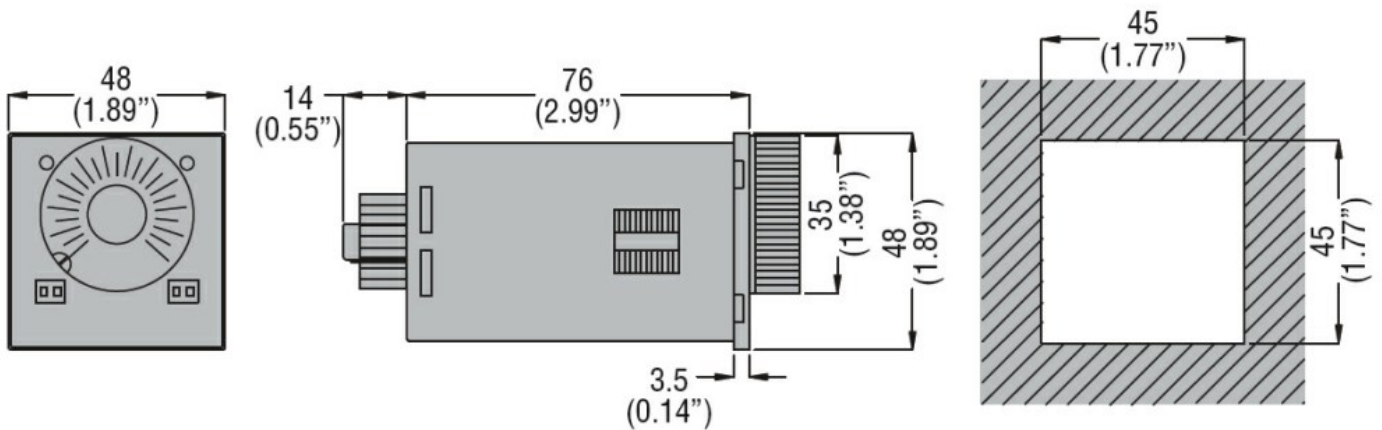

**Wiring diagrams**

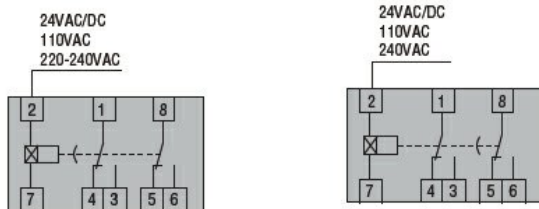

**Certifications and compliance**

Compliance

- CSA C22.2 n°14
- IEC/EN 61812-1
- UL508

Certificates

- cURus
- EAC

**ETIM classification**

ETIM 8.0

EC001439 -  
Timer relay