



Monoblock buzzer
- Continuous or pulse tone
LPCZS

Product designation

Product type designation

General characteristics

Type of positions	Buzzer
Material	Polyamide
IEC degree of protection	IP40 on front and IP20 on rear

Electrical characteristics

Rated impulse withstand voltage U_{imp}	kV	4
Rated frequency	Hz	50-60
Supply voltage (AC)	V	18...30
Supply voltage (DC)	V	18...30

Mechanical features

Tightening torque for terminals max	Nm	0.5
Screwdriver	Flat-head: 0.6x3.5mm/0.02x0.	
Conductor section		

AWG/kcmil conductor section

min	24
max	14

IEC

min	mm ²	0.5
max	mm ²	2.5

Weight	g	20
--------	---	----

UL technical data

UL degree of protection	1, 2, 3R, 4, 4X, 12, 12K on front
-------------------------	--------------------------------------

Ambient conditions

Temperature


Operating temperature

min	°C	-25
max	°C	+70


Storage temperature

min	°C	-40
max	°C	+85

Dimensions [mm (in)]

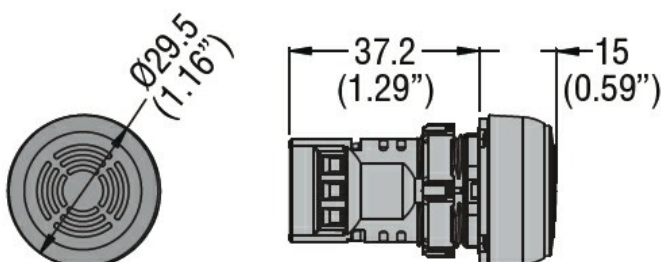

Wiring diagrams

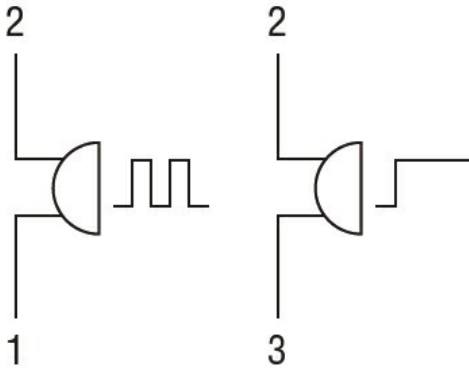

Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN/BS 60947-1
IEC/EN/BS 60947-5-1
UL508

Certificates

CCC
cULus
EAC

ETIM classification

ETIM 8.0

EC000130 -
 Signal horn