



Monoblock buzzer
- Continuous or
pulse tone
LPCZS

Product designation

Product type designation

General characteristics

Type of positions

Buzzer

Material

Polyamide

IEC degree of protection

IP66, IP67;
IP96K on front
and IP20 on rear

Electrical characteristics

Rated impulse withstand voltage U_{imp}

kV 4

Rated frequency

Hz 50-60

Supply voltage (AC)

V 185...265

Supply voltage (DC)

V 185...265

Mechanical features

Tightening torque for terminals max

Nm 0.5

Screwdriver

Flat-head:
0.6x3.5mm/0.02x0.

Conductor section

AWG/kcmil conductor section

min 24
max 14

IEC

min mm² 0.5
max mm² 2.5

Weight

g 20

UL technical data

UL degree of protection

1, 2, 3R, 4, 4X,
12, 12K on front

Ambient conditions

Temperature


Operating temperature

min °C -25
max °C +70


Storage temperature

min °C -40
max °C +85

Dimensions [mm (in)]

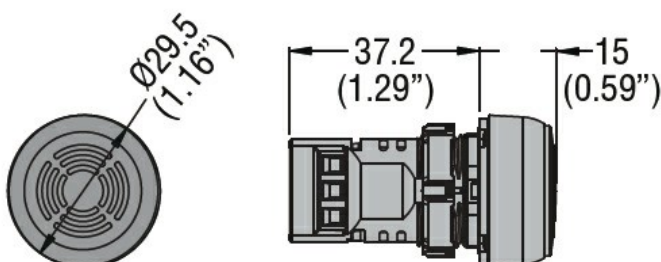

Wiring diagrams

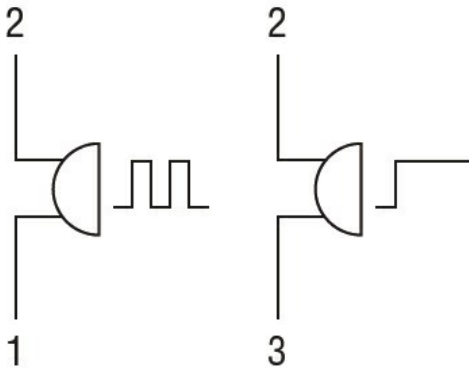

Certifications and compliance

Compliance

CSA C22.2 n° 14
 IEC/EN/BS 60947-1
 IEC/EN/BS 60947-5-1
 UL508

Certificates

CCC
 cULus
 EAC

ETIM classification

ETIM 8.0

EC000130 -
 Signal horn