





Product designation	Miniature circuit breaker (MCB)			
Product type designation	P2 MB			
Number of poles	3P			
Number of DIN modules	4.5			
Compliance	IEC / UL1077			
Electrical features				
Rated insulation voltage U_i IEC/EN	V	400		
Rated impulse withstand voltage U_{imp}	kV	6		
Rated operational voltage AC (IEC)	VAC	230/400		
Rated frequency	Hz	50/60		
Rated current (I_n)	A	100		
Tripping curve		D		
Short circuit rating (IEC)	kA	10		
Electrical life	cycles	10000		
Power dissipation per pole max	W	14		
Ambient conditions				
Operating temperature	min	°C	-40	
	max	°C	+70	
Storage temperature	min	°C	-40	
	max	°C	+80	
Max altitude		m	2000	
Mechanical features				
Operating position	normal	Vertical plan		
Fixing		35mm DIN rail		
Tightening torque for terminals	min	Nm	3.2	
	max	Nm	3.5	
	min	lbin	28.3	
	max	lbin	31	
Terminals tool		Pz 2		
Conductor section	IEC	min	mm ²	2.5
		max	mm ²	50
	AWG/Kcmil	min		14
		max		1/0
	Mechanical life		cycles	10000
	Weight		g	510
Frontal IP degree		IP20		
Pollution degree		3		

Dimensions [mm (in)]

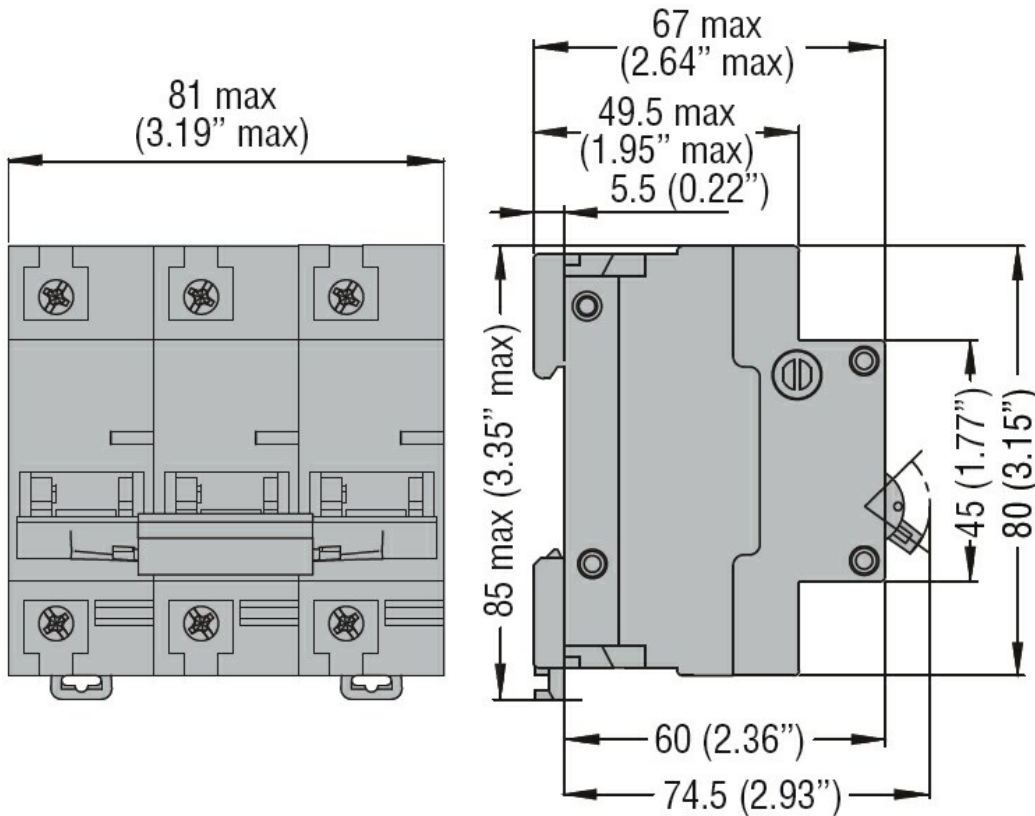

Wiring diagrams



Certifications and compliance

Compliance

CSA C22.2 n°235. UR "UL Recognized" per Canada e USA.

IEC/EN 60947-2

UL 1077

Certifications

cURus

EAC

TÜV-Rheinland

ETIM classification

ETIM 8.0

EC000042 -
Miniature circuit
breaker (MCB)