

Technical data sheet

Actuator sensor interface · RJ45 connector

Industrial connector RJ45, angled

Solid metal housing, quick-connect technology AWG 27–24

Cat.6_A



Identification

Type RJ45-MR 8pol. Cat.6A T568B AWG 26/19
Part No. [490153](#)

Product version

Datasheet version 00

General

Design	RJ45 angle connector
Form male 1	RJ45 angle connector shielded
Degree of pollution	1
Insulation resistance	>500 MΩ
Contact resistance	<20 mΩ
Flamability according to UL 94	V0
Degree of protection	IP20
Housing material	Zinc die-casting
Color of the housing	silver
Color	black
Cover	PBT black
Contact material	Spring steel gold-plated
Strand diameter	0.85 mm – 1.1 mm
Cable diameter	5.5 mm – 10 mm
Operation temperature range	-40 °C ... +85 °C
Storage temperature range	-40 °C ... +85 °C
Dimensions (w × h × d)	13.9 mm × 38.0 mm × 45.7 mm
Mechanical service life	>750 insertion cycles
Cross-section AWG	26-24/1, 27-24/7, 26/19
Connection type	8-pin RJ45 Push-through contacts IPC

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

29.04.2022 • Subject to technical modification

Part No. [490153](#) • Datasheet version: 00

page 1 of 3



SYSTEMATIC TECHNOLOGY

Technical data sheet

Actuator sensor interface · RJ45 connector

Weight/unit	0.03 kg
PU (units)	1

Technical data

Rated voltage U_N	30 V
Rated current	≤ 1 A per contact
Pole number	8
Bandwidth	500 MHz
Transfer rate	10 Gbit/s
Category	Cat.6 _A
Shielding	shielded


Approvals/Standards

Approvals	cULus Listed (E326112)
Standards	IEC 60603-7-51

Notes and Comments

Comments	Suitable for Profinet, SERCOS3, Ethercat, Ethernet/IP, Powerlink, VARAN, Power over Ethernet+ (PoE+IEEE 802.3at) Suitable cables, see overview assignment Ethernet cables to connectors
----------	--

Dimensions

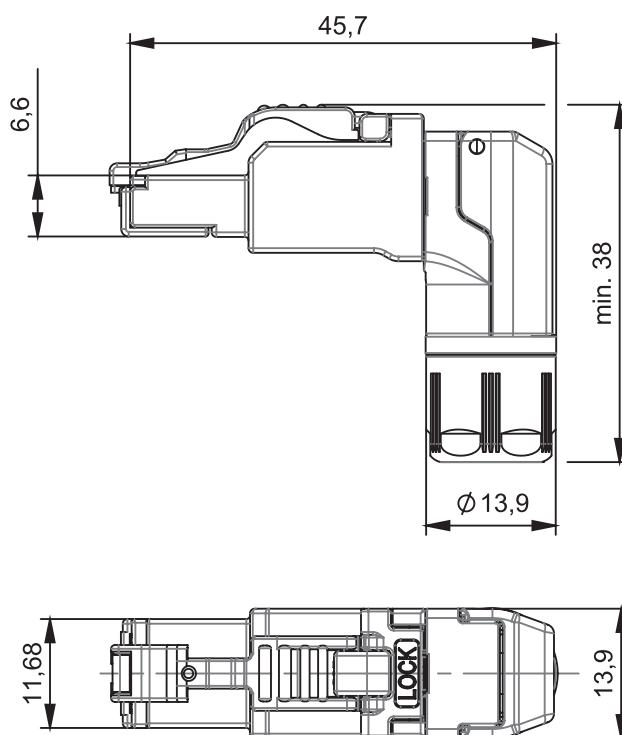


Technical data sheet

Actuator sensor interface · RJ45 connector

Connection assignment

RJ45 male
Ethernet T568B

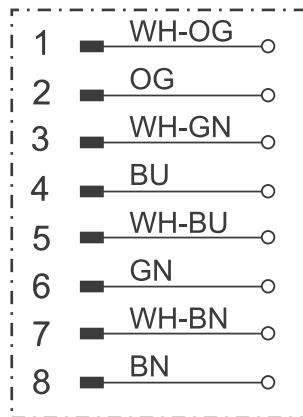

Mounting diagram

