

## Technical data sheet

Interface Technology · LCIS Mechanical Relay

---

**Output relay interface, relay with 1 change over contact**  
**AC/DC 250 V, 6 A, 1500 VA / 144 W**  
**Screw terminal / Push-In, contact material: AgSnO<sub>2</sub> + 5 µm HV**



---

### Identification

Type	LCIS-RGA230UP-S-1U-HTV
Part No.	<a href="#">760061.0010</a>

---

### Product version

Hardware revision	1.0
Datasheet version	03

---

### Input

Rated voltage U <sub>N</sub>	AC/DC 230 V
Input voltage range	184 V – 253 V
Rated frequency f <sub>N</sub>	50 Hz / 60 Hz
Rated current I <sub>N</sub>	3.6 mA
Protection device Input	Bridge rectifier
Max. length of connecting lead	DC: 1000 m / AC: 500 m
Status display input	LED green
Interrupting voltage	<12.7 V

---

### Output

Contact type	1 changeover contacts / SPDT
Min. switching voltage	AC/DC 1 V
Max. switching voltage	AC/DC 250 V
Min. switching current	AC/DC 1 mA
Max. switching current	AC/DC 6 A
Switching capacity DC 13	1 A @ 24 V 200 mA @ 125 V 100 mA @ 250 V
Switching capacity AC 15	3 A
Max. switching capacity	1500 VA / 144 W
Contact material	AgSnO <sub>2</sub> + 5 µm HV

---

#### USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA  
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223  
www.lutze.com • info@lutze.com

15.03.2024 • Subject to technical modification  
Part No. [760061.0010](#) • Datasheet version: 03

## Technical data sheet

### Interface Technology · LCIS Mechanical Relay

---

Mechanical service life	> 10 x 10 <sup>6</sup> operations
Inrush current	16 A (4 ms)
Switch-on delay	10 ms
Shutdown delay	15 ms
Protection device	None
Max. length of connecting lead	DC: 1000 m / AC: 500 m
Degree of protection	IP20
Comments	Hard gold-plated contacts: So that the gold layer is not damaged, the specified values are not permitted to be exceeded. At higher switching capacity, the gold layer vaporizes. The deposition in the housing can lead to sparkovers between the coil and contact.

---

#### General

---

Housing material	PA 6.6 (UL 94 V-0)
Color of the housing	RAL 7012 Basalt grey
Degree of protection	IP20
Mounting	DIN rail mountable TS35 (EN 60715)
Installation position	Any
Insulation voltage input / output	4.0 kV <sub>eff</sub>
Safe isolation	yes
Clearance/creepage dist. (control/ load side)	>5.5 mm
Rated insulation voltage (EN 50178)	300 V
Connection type	Screw terminal Single wire 0.25 mm <sup>2</sup> – 2.5 mm <sup>2</sup> / AWG 24–14 Fine stranded wire with ferrule 0.25 mm <sup>2</sup> – 1.5 mm <sup>2</sup> / AWG 24–16
Strip length	6 mm
Dimensions (w × h × d)	6.2 mm × 93.0 mm × 73.0 mm
Weight/unit	0.03 kg
PU (units)	5

---

#### General ambient conditions

---

Operation temperature range	-25 °C ... +60 °C
Storage temperature range	-40 °C ... +80 °C
Relative air humidity	20 – 90 % RH, not condensing
Vibration resistance	0.7 g acc. to EN 60068-2-6
EMC tests	Class B

---

#### Approvals/Standards

---

Conformity	CE UKCA
Approvals	cULus (E135145) DNV (TAA000024Y)

# Technical data sheet


## Interface Technology · LCIS Mechanical Relay

Standards	EN 60947-1
	EN 60947-5-1
	EN 61000-6-2
	EN 61000-6-4
	UL 508
	DNV-CG-0339


### Notes and Comments

Comments Hard gold-plated contacts: So that the gold layer is not damaged, the specified values are not permitted to be exceeded. At higher switching capacity, the gold layer vaporizes. The deposition in the housing can lead to sparkovers between the coil and contact.

### Dimensions

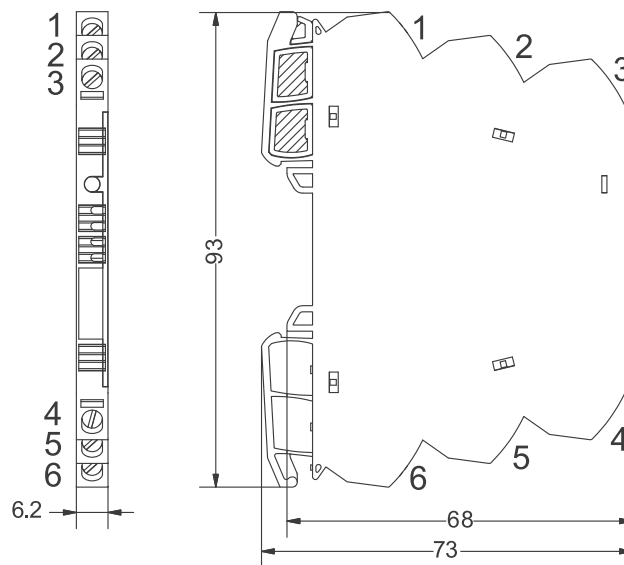

### PIN assignment

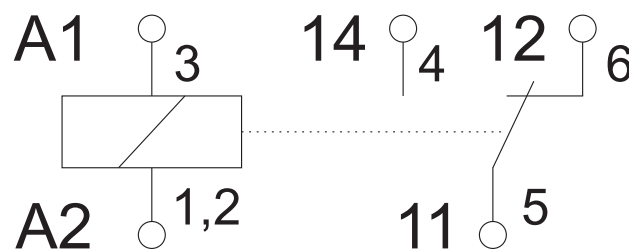

### Use

