

## Technical data sheet

Ethernet · Unmanaged E-CO Switch, 5-Port, 10/100 MBit/s

---

**QoS - Quality of Service, PROFINET Conformance Class A**  
**5 Fast Ethernet ports RJ-45, compact design, energy management**  
**Redundant AC/DC supply, extended temperature range, ESD 6 kV**



---

### Identification

---

Type ET-SWU5E  
Part No. [772004](#)

---

### Product version

---

Datasheet version 01

---

### Communication

---

Standard IEEE 802.3 10BASE-T, IEEE 802.3u 100BASE-TX/100BASE-FX  
IEEE 802.3x flow control and back pressure  
IEEE 802.1p Class of Service  
IEEE 802.3az Energy Efficient Ethernet (EEE)  
IEC 60068-2-32 (free fall), IEC 60068-2-27 (shock), IEC 60068-2-6 (vibration)

LAN 10/100 Base-TX RJ45 Auto-MDI/MDI-X

Cable length (segment) Max. 100 m

Transfer rate max. 10/100 Mbit/s

Connection technology (data) 5 × RJ45  
0.74 Mpps @ 64 bytes

Status display communication System:  
Power 1 (P1): green  
Power 2 (P2): green  
Alarm, (Fault): red  
Per 10/100TX RJ45 Ports:  
10/100 LNK/ACT: green  
Store-and-Forward  
448 kbit/s

Source Address Table 1K inputs, automatic source address learning and aging

---

#### United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park  
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU  
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2  
www.lutze.com • sales.gb@lutze.co.uk

#### Germany: Friedrich Lütze GmbH

Postfach 12 24 (PLZ 71366) • Bruckwiesenstraße 17-19 • D-71384 Weinstadt  
Tel. +49 (0)7151 6053-0 • Fax +49 (0)7151 6053-277(-288)  
www.luetze.de • info@luetze.de

21.04.2022 • Subject to technical modification

Part No. [772004](#) • Datasheet version: 01

page 1 of 3



SYSTEMATIC TECHNOLOGY

## Technical data sheet

### Ethernet · Unmanaged E-CO Switch, 5-Port, 10/100 MBit/s

---

FLOW Source	EEE 802.3x pause frame for full-duplex Back pressure for half-duplex
Switch Fabric	1 Gbps (non-blocking)

---

#### Safety

---

ESD (Ethernet)	DC 6 kV
Surge (EFT for power)	DC 4 kV
Reverse voltage protection	Yes

---

#### Monitoring

---

Error output	Relay, 1 NO contact - 1 A @ DC 24 V
Switching current	1 A @ DC 24 V
Switching voltage	AC 120 V / DC 28 V
Isolation voltage	DC 500 V

---

#### General

---

Rated voltage $U_N$	DC 12 – 48 V redundant, AC 24 V
Nominal voltage range	9 V – 52 V
Rated current	2 W, DC: max. 0.17 A, AC: max. 0.15 A
Degree of protection	IP30
Relative humidity (operation)	5 % – 90 % (non-condensing)
Relative humidity (storage)	0 % – 90 % (non-condensing)
Housing material	Metal
Mounting	DIN rail mountable TS35 (EN 60715) Wall mounting
Installation position	Any
Connection type	6-pole pluggable screw terminal for power supply and fault diagnosis single wire/fine wire 0.25 mm <sup>2</sup> – 2.5 mm <sup>2</sup> AWG 20 – AWG 14 fine stranded wire with ferrule 0.25 mm <sup>2</sup> – 1.5 mm <sup>2</sup> AWG 20 – AWG 16
MTBF	>100000 h
Dimensions (w × h × d)	30.0 mm × 104.0 mm × 70.0 mm
Weight/unit	0.255 kg
PU (units)	1

---

#### General ambient conditions

---

Operation temperature range	-40 °C ... +75 °C
Storage temperature range	-40 °C ... +75 °C


# Technical data sheet

Ethernet · Unmanaged E-CO Switch, 5-Port, 10/100 MBit/s

## Certifications/Standards


Certifications	CE FCC Part 15 Class A UKCA cULus (E332878)
Standards	EN 55032 EN 55035 IEC 61000-4-2/3/4/5/6/8 IEC 60068-2-27 IEC 60068-2-32 IEC 60068-2-6

## Dimensions

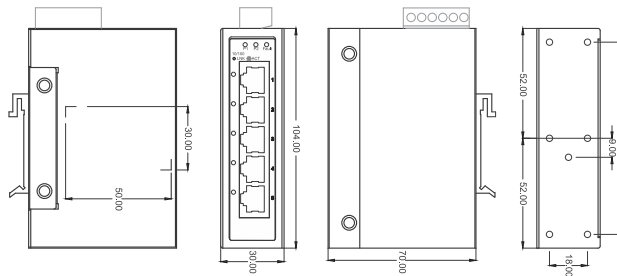

## PIN assignment

Max. fault loading: 24V, 1A



## LED status

Anzeige Display Affichage	Farbe Color Couleur	Typ Type Type	Beschreibung Discription Discription
P1 ○ ○ ●	grün green vert	Power 1	grün an green on allumée en vert
			PWR 1 ist angeschlossen PWR 1 is connected Le PWR 1 est connecté
P2 ○ ○ ●	grün green vert	Power 2	grün an green on allumée en vert
			PWR 2 ist angeschlossen PWR 2 is connected Le PWR 2 est connecté
Fault ○ ○ ●	rot red rouge	Fault	rot an red on allumée en rouge
			Die AC- oder DC-Spannung hat einen Fehler. The AC or DC voltage has an error. La tension AC ou DC présente une erreur.
10/100 ○ LNK ○ ACT	grün green vert	10/100 LINK/ACT	grün an green on allumée en vert
			Der Port arbeitet mit 10/100 Mbps The port works with 10/100 Mbps Le port fonctionne avec 10/100 Mbps
			grün blinkt green flashes clignotements verts
○ LNK ○ ACT ○ 100		10/100 LINK/ACT	Der Port empfängt oder sendet Daten The port is actively sending or receiving datas Le port reçoit ou envoie des données