

BMECRA31210

Modicon X80 EIO Drop adapter with Ethernet backplane

Product availability : Stock - Normally stocked in distribution facility



Main

Range of product	Modicon X80
Product or component type	Ethernet RIO drop adaptor

Complementary

Bus type	Bus X across the remote backplane Ethernet across the remote backplane
Number of port	3
Integrated connection type	Ethernet/IP (device network) Ethernet/IP (service port)
Communication port protocol	Ethernet/IP
Communication service	RSTP support Configure IP parameters Diagnostics for remote I/O devices The input data are collected and published to the remote I/O head adaptor Output modules are updated with the data received from remote I/O head adaptor
Function available	CCOTF (configuration change on the fly)
Data recording	10 ms time stamps
Topology	Daisy chain loop
Local signalling	1 LED - green module active (RUN) 1 LED - red module error (ERR) 1 LED - green/red module status (Mod Status) 1 LED - green/red network communication status (Net Status) 1 LED - green Ethernet link diagnostics (STS)
Product compatibility	BMXERT multifunction input module BMXNOM Ethernet module BMXEHC counter module PMESWT weighing module BMEAH... HART module 1024 discrete channel 256 analog channel
Marking	CE

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Module format	Standard
---------------	----------

Environment

Environmental characteristic	Standard environment
Directives	2012/19/EU - WEEE directive 2014/30/EU - electromagnetic compatibility 2014/35/EU - low voltage directive
Product certifications	C-Tick GOST Merchant Navy
Standards	EN 61000-6-2 EN 61000-6-4 EN 61131-2 EN 61010-2-201
IP degree of protection	IP20
Ambient air temperature for operation	32...140 °F (0...60 °C)
Ambient air temperature for storage	-40...185 °F (-40...85 °C)
Operating altitude	<= 6561.68 ft (2000 m)
Altitude transport	<= 9842.52 ft (3000 m)
Relative humidity	95 % without condensation

Ordering and shipping details


Category	18160 - MODICON M340
Discount Schedule	PC34
GTIN	00785901964292
Nbr. of units in pkg.	1
Package weight(Lbs)	0.5999999999999998
Returnability	Y
Country of origin	FR

Offer Sustainability

Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 1623 - Schneider Electric declaration of conformity Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold Reference not containing SVHC above the threshold
Product environmental profile	Available Product Environmental Profile
Product end of life instructions	Available
California proposition 65	WARNING: This product can expose you to chemicals including:
- - - - - Substance 1	Lead and lead compounds which is known to the State of California to cause cancer and birth defects or other reproductive harm.
- - - - - More information	For more information go to www.p65warnings.ca.gov

Modules Mounted on Racks

Dimensions

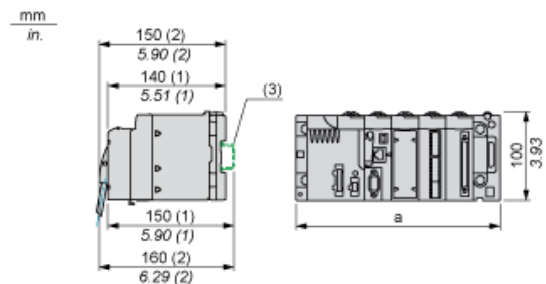

- (1) with removable terminal block (cage, screw or spring)
- (2) with FCN connector
- (3) on AM1 ED rail: 35 mm wide, 15 mm deep. Only possible with BMEXBP0400/0400H/0800/0800H/1200/1200H rack.

	a (in mm)	a (in in.)
BMEXBP0400 and BMEXBP0400H	242.4	09.54
BMEXBP0800 and BMEXBP0800H	372.8	14.68
BMEXBP1200 and BMEXBP1200H	503.2	19.81