

MuLOGIC

MCF-16.3 Modem chassis





3U, 19" card rack for DLM-336R and LLM-336R

The MuLogic MCF-16.3 is a 19" 3U (5.25") chassis with slots for up to 16 modem cards. The MCF-16.3 can be manufactured on request in several connector layout versions.


Version	line connectors	data connectors	RS485 connectors
MCF-16.3MM	RJ-45	RJ-45*	Optional
MCF-16.3MD	RJ-45	DB25	N/A
MCF-16.3DM	DB37	RJ-45*	Optional
MCF-16.3DD	DB37	DB25	N/A

Note*: RJ45 connector can be used for asynchronous data only.

Mechanical details

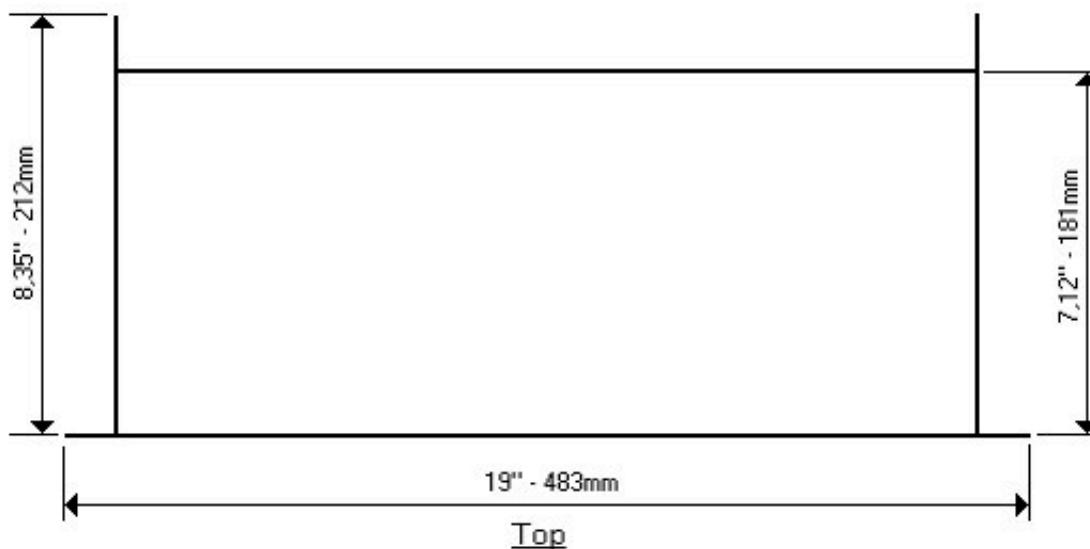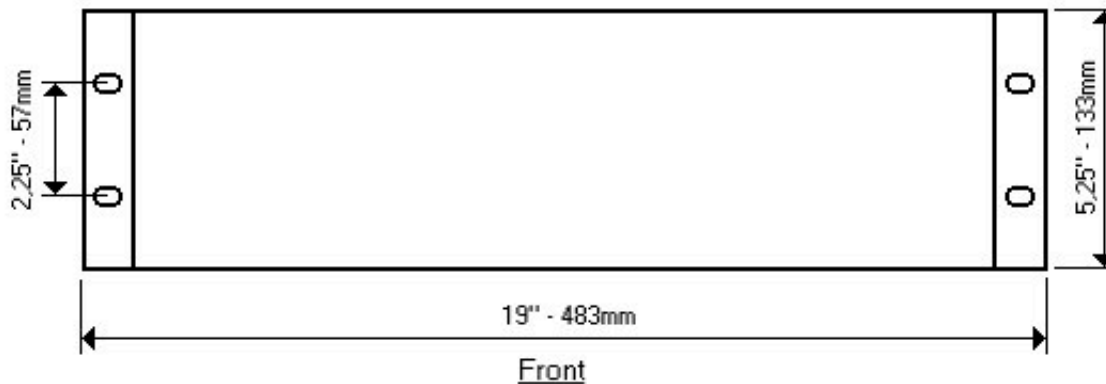

Back panel

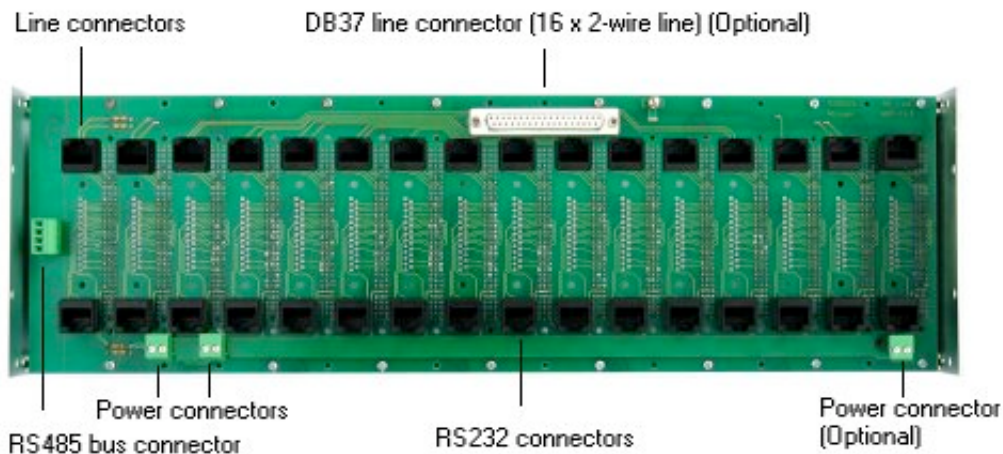

Back of the MCF-16.3MM

External Power Supplies

All MuLogic rack cards can be powered directly from 9..36Vdc (10..28Vac) or 18..72Vdc (20..50Vac) sources.

If these voltages are not available, external power supply units can be mounted in an additional rack or standalone (e.g. DIN-rail mounted PSUs or AC transformers)

[Back to products page](#)

MuLogic b.v. - Olivier van Noortstraat 4, 3124 LA - Schiedam - The Netherlands - Tel: +31 10 4700077 - Fax: +31 10 4700958
E-mail: inform@mulogic.com