



## PE405TSC-100-4


GENERAL PURPOSE ELECTRIC MOTOR

NEMA PREMIUM EFFICIENCY

TOTALLY ENCLOSED FAN COOLED - C-FLANGE WITH FEET

INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31

Factory Certified for T2B Class I, Division II, Groups A,B,C & D and Class II, Division II, Groups F & G

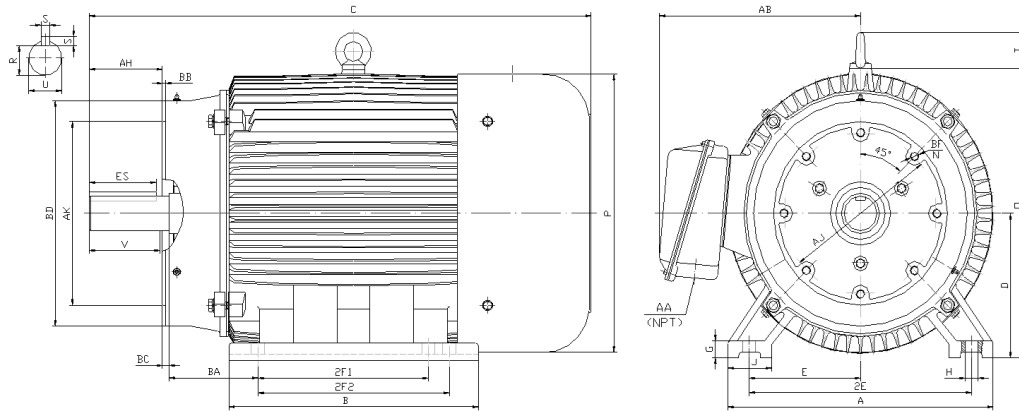

### DIMENSIONS

HP	RPM	Frame	MOUNTING														
			A	B	C	D	G	H	J	E	2E	2F1	2F2	O	P	T	BA
100	1800	405TSC	19.3	17.9	35	10	1.18	0.81	3.15	8	16	12.25	13.75	21.1	21.6	2.6	6.62

FLANGE							Shaft Extension, Key Set						
AH	AJ	AK	BB	BC	BD	BF	U	V	R	S	ES	N-W	
4	11	12.5	0.25	0.25	15.5	8*5/8-11	2.125	4	1.845	0.5	2.78	NA	

Conduit Box		Bearings		Mount
AA	AB	DE	ODE	
3	16.6	6318	6314	F1

**BEARING LUBRICATION:** The bearings come lubricated with Mobil Polyrex EM Polyurea Grease. It is recommended that you add some additional lubrication when the motor is installed.

Three options (brands) for suitable lubrication include, but are not limited to, the following:

- 1.) Mobil Polyrex EM
- 2.) Citco Polyurea MP
- 3.) Conoco Phillips Polytac EP





## PE405TSC-100-4

**GENERAL PURPOSE ELECTRIC MOTOR**

**NEMA PREMIUM EFFICIENCY**

**TOTALLY ENCLOSED FAN COOLED - C-FLANGE WITH FEET**

**INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31**

**Factory Certified for T2B Class I, Division II, Groups A,B,C & D and Class II, Division II, Groups F & G**

### PERFORMANCE DATA

HP	RPM	Frame	Voltage	Frequency (Hz)	Full Load S.F.	Insulation Class	NEMA Design	Slip (%)	NEMA Code	Enclosure Type	IP Rating	Max. Ambient
100	1790	405TSC	208-230/460	60	1.15	F	B	0.6	G	TEFC	55	40 °C

Amps (460V)		Efficiency (%)			Power Factor			Torque (ft-lb)			DE Bearing	ODE Bearing	Connection	Weight (lbs.)
FLA	LRA	100%	75%	50%	100%	75%	50%	FLT	LRT %	BDT %				
112	725	95.4	95.4	95.2	0.87	0.84	0.77	295.17	155	240	6318	6314	12 Lead 2Δ/Δ	1228

### NAME PLATE

		AC INDUCTION MOTOR INVERTER DUTY 20:1 VT; 10:1 CT								CONNECTION DIAGRAMS			
CAT NO.		PE405TSC-100-4				FRAME		405TSC		PHASE 3			
HZ	60	S.F.	1.15	HZ	50	S.F.	1.0	ENCL	TEFC	IP	55		
HP	100	RPM	1790	HP	100	RPM	1485	DUTY	CONT	DES	B		
VOLTS 208-230/460		VOLTS 190/380		AMB 40 °C		INS		F					
AMPS 248 - 224 / 112		AMPS 274/137		DE BRG		6318							
CODE	G	P.F.	0.87	CODE	F	P.F.	0.88	ODE BRG		6314			
EFF	95.4	MIN	94.5	EFF	94.1	MIN	93.2	LUB: Mobil Polyrex EM					
MOTOR WEIGHT 1228 LBS		CONNECTION 12 Lead 2Δ/Δ			SER NO								
General purpose use on industrial machinery installed in damp, dusty or dirty environments. Hernando, Mississippi													
ISO9001 CERTIFIED		CE		SP US 272709		CC082A							
General purpose use on industrial machinery installed in damp, dusty or dirty environments. Hernando, Mississippi													

### APPLICATIONS:

General purpose use on pumps, fans, blowers, compressors, conveyors, material handling and other industrial machinery installed in damp, dusty or dirty environments.