



PE449TSC-250-2


GENERAL PURPOSE ELECTRIC MOTOR

NEMA PREMIUM EFFICIENCY

TOTALLY ENCLOSED FAN COOLED - C-FLANGE WITH FEET

INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31

Factory Certified for T2B Class I, Division II, Groups A,B,C & D and Class II, Division II, Groups F & G

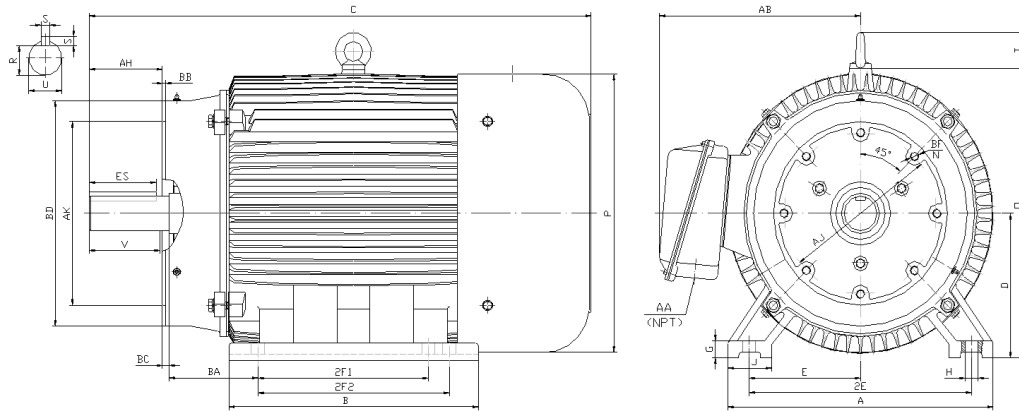

DIMENSIONS

HP	RPM	Frame	MOUNTING														
			A	B	C	D	G	H	J	E	2E	2F1	2F2	O	P	T	BA
250	3600	449TSC	21.7	31.4	49.1	11	1.35	0.81	3.35	9	18	20	25	23	23.4	3	7.5

FLANGE							Shaft Extension, Key Set						
AH	AJ	AK	BB	BC	BD	BF	U	V	R	S	ES	N-W	
4.5	14	16	0.25	0.25	18	8*5/8-11	2.375	4.5	2.021	0.625	3.03	NA	

Conduit Box		Bearings		Mount
AA	AB	DE	ODE	
3	19.9	6314	6314	F1

BEARING LUBRICATION: The bearings come lubricated with Mobil Polyrex EM Polyurea Grease. It is recommended that you add some additional lubrication when the motor is installed.

Three options (brands) for suitable lubrication include, but are not limited to, the following:

- 1.) Mobil Polyrex EM
- 2.) Citco Polyurea MP
- 3.) Conoco Phillips Polytac EP





PE449TSC-250-2

GENERAL PURPOSE ELECTRIC MOTOR

NEMA PREMIUM EFFICIENCY

TOTALLY ENCLOSED FAN COOLED - C-FLANGE WITH FEET

INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31

Factory Certified for T2B Class I, Division II, Groups A,B,C & D and Class II, Division II, Groups F & G

PERFORMANCE DATA

HP	RPM	Frame	Voltage	Frequency (Hz)	Full Load S.F.	Insulation Class	NEMA Design	Slip (%)	NEMA Code	Enclosure Type	IP Rating	Max. Ambient
250	3580	449TSC	460	60	1.15	F	B	0.6	G	TEFC	55	40 °C

Amps (460V)		Efficiency (%)			Power Factor			Torque (ft-lb)			DE Bearing	ODE Bearing	Connection	Weight (lbs.)
FLA	LRA	100%	75%	50%	100%	75%	50%	FLT	LRT %	BDT %				
266	1825	95.8	95.8	95.1	0.91	0.90	0.88	367.38	130	240	6314	6314	6 Lead Δ	2006

NAME PLATE

		AC INDUCTION MOTOR INVERTER DUTY 20:1 VT; 10:1 CT								CONNECTION DIAGRAMS		
CAT NO.		PE449TSC-250-2				FRAME		449TSC		PHASE 3		
HZ	60	S.F.	1.15	HZ	50	S.F.	1.0	ENCL	TEFC	IP	55	Across The Line
HP	250	RPM	3580	HP	250	RPM	2980	DUTY	CONT	DES	B	
VOLTS		460		VOLTS		380		AMB	40 °C	INS	F	
AMPS		266		AMPS		326		DE BRG		6314		PWS Start
CODE	G	P.F.	0.91	CODE	F	P.F.	0.92	ODE BRG		6314		
EFF	95.8	MIN	95.0	EFF	94.3	MIN	93.5	LUB: Mobil Polyrex EM				PWS Run
MOTOR WEIGHT	2006 LBS		CONNECTION			6 Lead Δ		SER NO				
General purpose use on industrial machinery installed in damp, dusty or dirty environments. Hermando, Mississippi												
								CC082A				

APPLICATIONS:

General purpose use on pumps, fans, blowers, compressors, conveyors, material handling and other industrial machinery installed in damp, dusty or dirty environments.