

PE587UZ-350-6C-BB


CRUSHER DUTY MOTOR

HIGH TORQUE / PREMIUM EFFICIENCY DESIGN

TOTALLY ENCLOSED FAN COOLED

HEAVY DUTY CAST IRON CONSTRUCTION

Factory Certified for T2B Class I, Division II, Groups A,B,C & D and Class II, Division II, Groups F & G

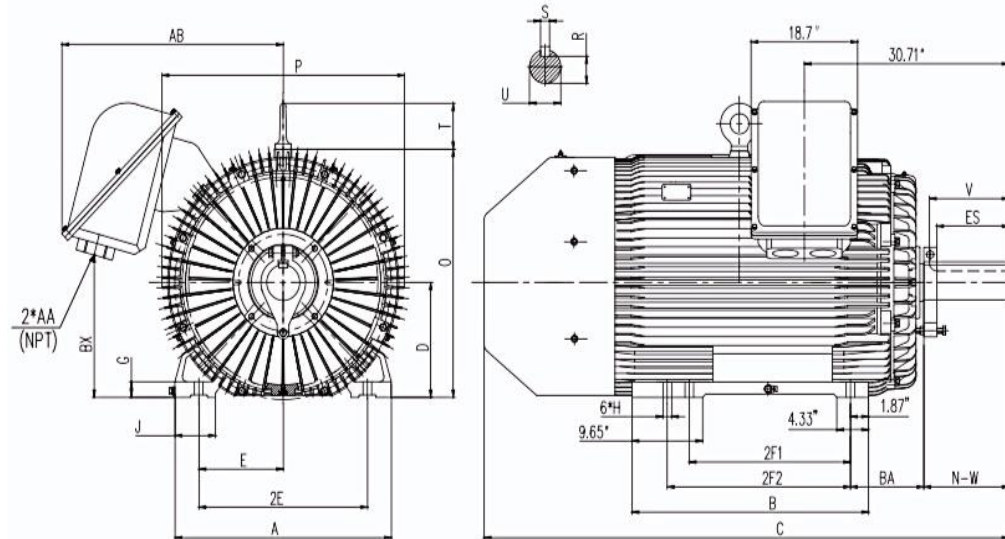

DIMENSIONS

HP	RPM	Frame	MOUNTING														
			A	B	C	D	G	H	J	E	2E	2F1	2F2	O	P	T	BA
350	1200	587UZ	29.53	32.3	71.65	14.5	1.97	1.18	5.51	11.5	23	22	25	41.44	33.07	5.8	10

Shaft Extension, Key Set						Conduit Box			Bearings		Mount
U	V	R	S	ES	N-W	AA	AB	BX	DE	ODE	
4.375	11.25	3.817	1	10	11.625	2 X 3"	28.15	18.82	6324	6319	F1

BEARING LUBRICATION: The bearings come lubricated with Mobil Polyrex EM Polyurea Grease. It is recommended that you add some additional lubrication when the motor is installed.

Three options (brands) for suitable lubrication include, but are not limited to, the following:

- 1.) Mobil Polyrex EM
- 2.) Citco Polyurea MP
- 3.) Conoco Phillips Polytac EP





PE587UZ-350-6C-BB

CRUSHER DUTY MOTOR

HIGH TORQUE / PREMIUM EFFICIENCY DESIGN

TOTALLY ENCLOSED FAN COOLED

HEAVY DUTY CAST IRON CONSTRUCTION

Factory Certified for T2B Class I, Division II, Groups A,B,C & D and Class II, Division II, Groups F & G

PERFORMANCE DATA

HP	RPM	Frame	Voltage	Frequency (Hz)	Full Load S.F.	Insulation Class	NEMA Design	Slip (%)	NEMA Code	Enclosure Type	IP Rating	Max. Ambient
350	1189	587UZ	460	60	1.15	F	C	0.9	G	TEFC	55	40 °C

Amps (460V)		Efficiency (%)			Power Factor			Torque (ft-lb)			DE Bearing	ODE Bearing	Connection	Weight (lbs.)
FLA	LRA	100%	75%	50%	100%	75%	50%	FLT	LRT %	BDT %				
390.4	2550	95.8	95.3	94.8	0.85	0.83	0.76	1548	200	230	6324	6319	12 Lead Δ	5176

NAME PLATE

AC INDUCTION MOTOR HIGH EFFICIENCY DESIGN CRUSHER DUTY MOTOR										CONNECTION DIAGRAMS																		
CAT. NO.		PE587UZ-350-6C-BB			FRAME		587UZ		PHASE	3	ENCL.		TEFC		460V 													
RATING			CONT		INS. CLASS			F		CONN.			12 Lead Δ															
DE BRG.			6324		ODE BRG.			6319		LUB.			Mobil Polyrex EM															
MAX. AMB.			40 °C		WEIGHT			5176		SER.																		
HP		350		RPM		1189		HP		350		RPM		990														
60 HERTZ DATA					VOLTS				460				VOLTS				380											
					F.L. AMPS				390.4				F.L. AMPS				472.6											
					S.F. AMPS				448.96				S.F. AMPS				472.6											
					S.F.		1.15		DESIGN		C		CODE		G		S.F.		1.0		DESIGN		C		CODE		H	
					NEMA NOM.EFF		95.3		NOM. P.F.		0.83		NEMA NOM.EFF		95.0		NOM. P.F.		0.85									
NEMA MIN.EFF		95.0		MAX. KVAR		58.0		NEMA MIN.EFF		94.3		MAX. KVAR		60.3														
PLATINUM RTD 3XPT100					SPACE HEATER 1X200W 115V(H1,H2)																							
Designed specifically for use on crushing and pulverizing equipment and other equipment requiring extremely high starting torques and breakdown torques.										CC041B																		
Hernando, MS 38632																												

APPLICATIONS:

Special purpose use on crushing and pulverizing equipment and other industrial equipment requiring extremely high starting torques and breakdown torques.