


OUTLET BOX  
0.875 DIA  
KNOCKOUT

REV C

9 LEADS, #18, .031 THICK INSUL. TO EXTEND 6.000+2.000-0.000 INCHES BEYOND SHELL INTO OUTLET BOX. ENDS TO BE SKINNED .750±.125

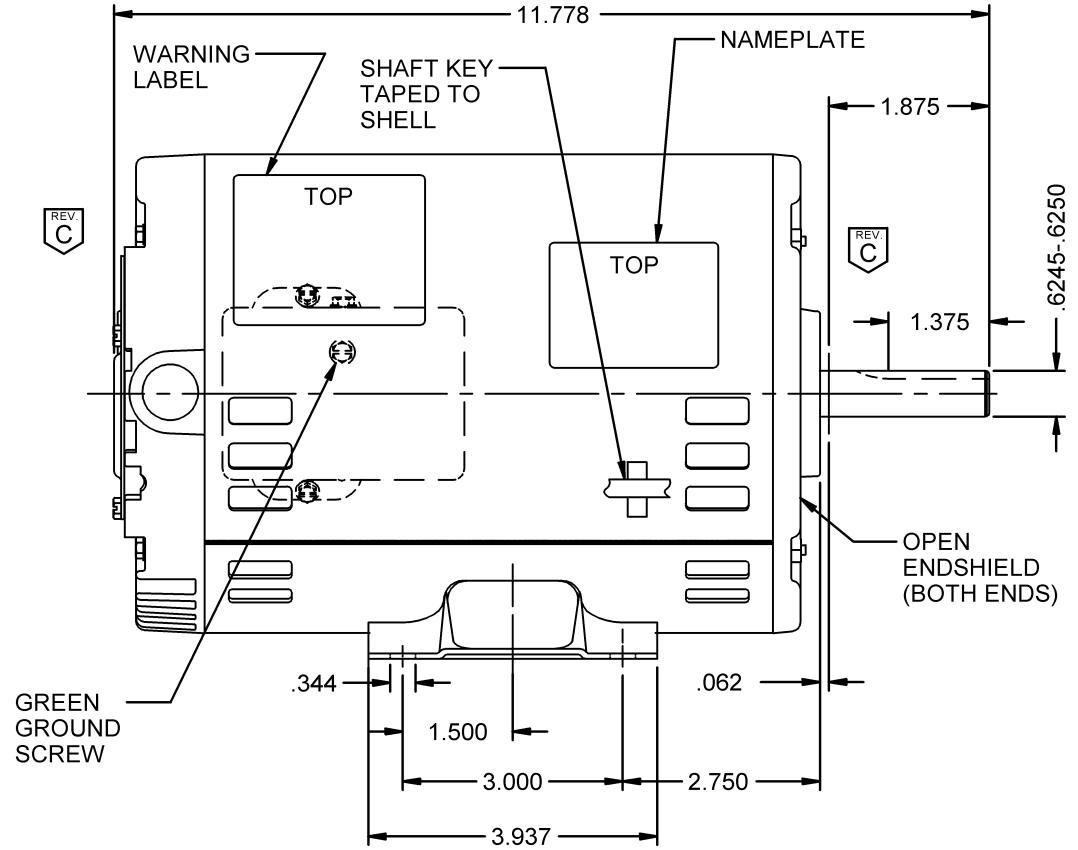

WARNING LABEL

SHAFT KEY TAPED TO SHELL

NAMEPLATE

REV C

REV C

GREEN GROUND SCREW

OPEN ENDSHIELD (BOTH ENDS)

LOW VOLTAGE	HIGH VOLTAGE
1-7-L1	1 -L1
2-8-L2	2 -L2
3-9-L3	3 -L3
4-5-6-INSUL.	4-7 -INSUL.
	5-8 -INSUL.
	6-9 -INSUL.

BEARING
BALL

NIDEC MOTOR CORPORATION 05-Oct-11

MODEL	REF	CUSTOMER	HP	VOLTS	AMPS	HZ	RPM	ROTATION	CUSTOMER PN
P63FDJ-4039		SYSTEMAIR	1 1/2	208-220 /440	5.0-5.0/2.5 & 5.5-5.7/2.9	60 & 50	1725 & 1425	CW/CCW	481872

SHEET NUMBER	REV	REVISION RECORD FOR:
1 OF 1	C	C4412-00
REVISION DATE		INTERCHANGED VIEW OF SCREW.
05-OCT-11		

INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION

**NIDEC MOTOR CORPORATION**

ISSUED BY	REVIEWED BY	ENGINEER APPROVED
B. ANDRADE	T. BOSSALLER	T. BOSSALLER

TITLE	CODE	ITEM NO.	SIZE
ASSEMBLED VIEW	V01	759472	A