


Insert Strips for Cable Marker (KMK...), Terminal Strip Marker (KLM...) and Terminal Strip Label (UBE...)

1. Description

Nowadays, the demands made of marking with respect to durability and appearance are ever increasing. To meet these requirements, we now supply two new options made of a perforated plastic foil (see photo). They can be labeled using a conventional laser printer (DIN A 4 format), or a thermo transfer printer (for material off the roll). It is of course still possible to label them with the M-PEN or CMS plotter. The advantages are that the lettering is permanent and makes an excellent impression, it is resistant to solvents, simple to handle and saves time when you have a greater throughput.

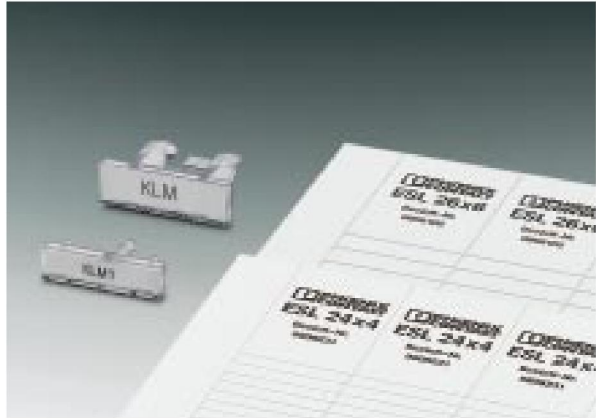

Phoenix Contact GmbH & Co. KG • 32823 Blomberg, Germany
Phone +49 52 35 3-00 • Fax +49 52 35 3-4 12 00 • www.phoenixcontact.com



EST...

ESL...

2. Technical Data

Insert strips, can be labeled with thermo transfer printer

Insert strips, can be labeled with laser printer

Insert strip, can be labeled with the thermo transfer printer ¹⁾

2.1. Description

Insert strip, for KLM 1, LM and AK-DST-UK, marking area 24 x 4 mm, 1 roll = 5.000 marker labels	white
Insert strip, for KMK and KMK 2, marking area 29 x 8 mm, 1 roll = 5.400 marker labels	white
Insert strip, for KMK 3, KMK 4 and UBE, UBE/D, marking area 40 x 17 mm, 1 roll = 2.300 marker labels	white
Insert strip, for KLM, marking area 25 x 6 mm, 1 roll = 5.000 marker labels	white

Large format insert strip, can be labeled with the laser printer ²⁾

2.2. Description

Large format insert strip, perforated, DIN A 4, for KLM 1, LM and AK-DST-UK, marking area 24 x 4 mm	488-section	white
Large format insert strip, perforated, DIN A 4, for KMK and KMK 2, marking area 29 x 8 mm	174-section	white
Large format insert strip, perforated, DIN A 4, for KMK 3, KMK 4 and UBE, UBE/D, marking area 40 x 17 mm	56-section	white
Large format insert strip, perforated, DIN A 4, for KLM, marking area 26 x 6 mm	266-section	white
Large format insert strip, perforated, DIN A 4, for KLM-A, marking area 44 x 7 mm	136-section	white

2.3. General Data

EST...	
Material	polyethylene
Temperature range	- 40 to + 100 [°C]
ESL...	
Material	polyester film, halogen-free
Temperature range	- 40 to + 100 [°C]

Type	Order No.	Pcs. Pkt.
EST 24 x 4	08 09 27 2	1
EST 29 x 8	08 07 46 5	1
EST 40 x 17	08 07 48 1	1
EST 25 x 6	08 07 47 8	1
ESL 24 x 4	08 08 23 1	10
ESL 29 x 8	08 08 25 7	10
ESL 40 x 17	08 08 09 5	10
ESL 26 x 6	08 08 10 5	10
ESL 44 x 7	08 08 24 4	10

http://www.phoenixcontact.com

TNR: 5112427-01

01.04.02

PHOENIX CONTACT

¹⁾ For further information, see Catalog CLIPLINE.

²⁾ Should you require more information, we would be pleased to be of assistance.