

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



Junction box, material: Stainless steel, 316L/1.4404, surface resistance: brushed, silver, 610 mm x 914 mm x 210 mm, type of locking: Door with replaceable hinge, scope of supply - ATD: Door hinge with quarter turn locking, Mounting plate, Double-bit key, Fixing angle with mounting screws, M12 grounding bolts, affixed externally, Installation notes, Door hinge with quarter turn locking

Your advantages

- Innovative product range of high-quality stainless steel housings as the basis for individual terminal boxes
- Reduced assembly and approval effort thanks to ready-equipped terminal boxes
- Flange plates possible on four sides of the housing, including seal protection
- Housing adjustments using threads, bore holes, and rectangular cutouts with consideration given to normative specifications



Key Commercial Data

Packing unit	1 pc
GTIN	4 046356 928823
GTIN	4046356928823
Weight per Piece (excluding packing)	34,150.000 g
Custom tariff number	94032080
Country of origin	Germany
Note	Made to Order (non-returnable)

Technical data

General

Scope of supply	Door hinge with quarter turn locking
	Mounting plate
	Double-bit key
	Fixing angle with mounting screws
	M12 grounding bolts, affixed externally
	Installation notes
Color	silver

Dimensions



Technical data

Dimensions

Width	610 mm
Height	914 mm
Depth	210 mm
Clearance width, maximum DIN rail length	2216 mm
Max. material thickness	2 mm

General

Housing material	Stainless steel, 316L/1.4404
Surface characteristics	brushed
Note	240 grain
Cover fastening	Door with replaceable hinge
Note	Quarter turn locking with two-way key bit
Fixing device	External fixing clips
Seal material	Silicon


Ambient conditions

Degree of protection of housing (IP)	IP66
Protection class	I
Degree of protection (IK)	7.00 J
Temperature in operating conditions	-55 °C 135 °C


Drawings





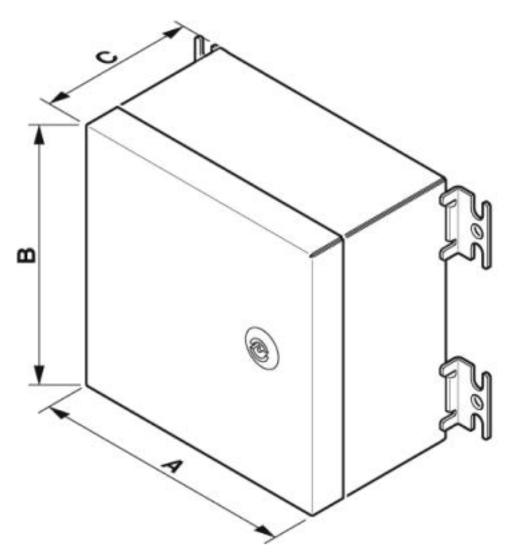



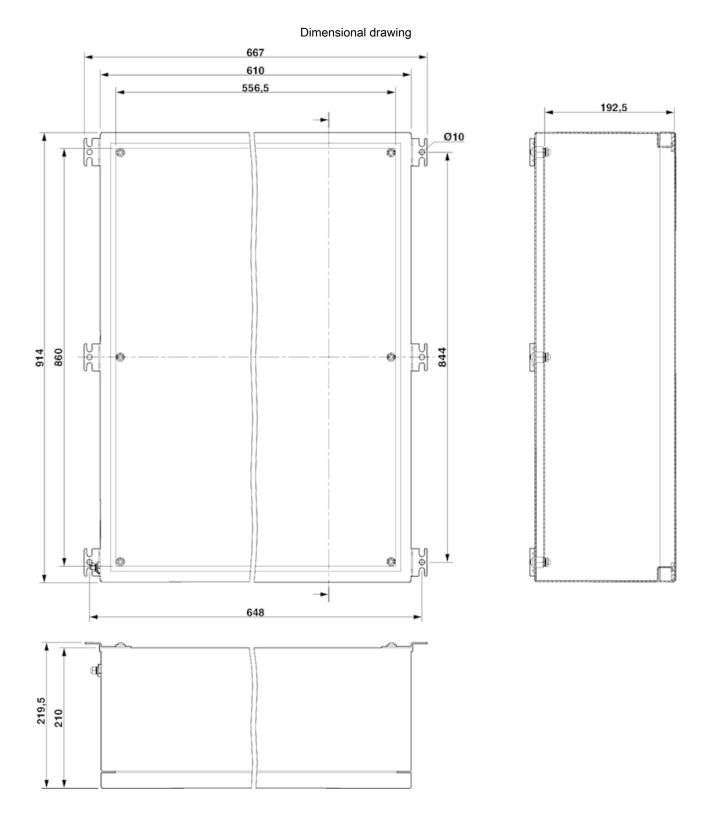



Classifications

eCl@ss

eCl@ss 10.0.1	27180190
eCl@ss 4.0	27180100
eCl@ss 4.1	27180100
eCl@ss 5.0	27180500
eCl@ss 5.1	27180100
eCl@ss 6.0	27180100
eCl@ss 7.0	27180190
eCl@ss 8.0	27180190
eCl@ss 9.0	27180190

ETIM

ETIM 4.0	EC000261
ETIM 5.0	EC000261
ETIM 6.0	EC000261
ETIM 7.0	EC000261

UNSPSC

UNSPSC 13.2	31261502
UNSPSC 18.0	31261502
UNSPSC 19.0	31261502
UNSPSC 20.0	31261502
UNSPSC 21.0	31261502

Approvals

Approvals

Approvals

UL Listed / cUL Listed / DNV GL / cULus Listed

Ex Approvals

IECEx / ATEX / EAC Ex

Approval details

UL Listed



http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm

E471053



Approvals

cUL Listed

C(UL)

http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm

E471053

DNV GL



https://approvalfinder.dnvgl.com/

TAE00001HA

cULus Listed



Accessories

Accessories

Mounting plate

Mounting plate - AE MP SH 610X914 - 0161992



Mounting plate, length: 2 mm, width: 858 mm, height: 554 mm, color: silver

Screwdriver tools

Screwdriver - SF-BIT-HEX 3-50 - 1212647



Screw bit, hexagon, E6.3-1/4" drive, size: Hex 3×50 mm, hardened, suitable for holder according to DIN 3126-F6.3/ ISO 1173

Screwdriver - SF-BIT-HEX 4-50 - 1212648



Screw bit, hexagon, E6.3-1/4" drive, size: Hex 4 x 50 mm, hardened, suitable for holder according to DIN 3126-F6.3/ ISO 1173

Torque tool



Accessories

Torque screwdriver - TSD-M 6NM - 1212226



Torque screw driver, accuracy as per EN ISO 6789 standard, adjustable from 3 - 6 Nm

Universal tools

Control cabinet key - USS 4 - 1203149



Control cabinet key, metal, for all common types of control cabinet

Phoenix Contact 2020 © - all rights reserved http://www.phoenixcontact.com