

# TTC-6P-3-EX-24DC-I-P - Surge protection plug



1064663

<https://www.phoenixcontact.com/us/products/1064663>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Surge protection plug with integrated status indicator on the module for a 3-wire floating Ex i signal circuit. Nominal voltage: 24 V DC

## Your advantages

- Space-saving and cost-saving with a narrow overall width of just 6 mm
- Continuous monitoring of protective devices, plus mechanical status indicator with optional remote signaling
- Finding the right product for all possible requirements in MCR applications is easy, thanks to the complete range of products with customized features
- Easy testing and documentation with CHECKMASTER 2 with pluggable protective modules
- The signal is not influenced during maintenance work, thanks to the impedance-neutral insertion and removal of protective plugs

## Commercial Data

Item number	1064663
Packing unit	1 pc
Minimum order quantity	1 pc
Sales Key	CL02
Product Key	CL216Z
Catalog Page	Page 158 (C-4-2019)
GTIN	4055626719764
Weight per Piece (including packing)	36.8 g
Weight per Piece (excluding packing)	9.3 g
Customs tariff number	85363010
Country of origin	DE

# TTC-6P-3-EX-24DC-I-P - Surge protection plug

1064663

<https://www.phoenixcontact.com/us/products/1064663>

## Technical Data

### Product properties

Type	Male
Product type	Replacement plug
Product family	TERMITRAB complete

### Insulation characteristics

Overvoltage category	III
Pollution degree	2


### Electrical properties

Nominal voltage $U_N$	24 V DC
-----------------------	---------

### Connection data

Connection method	pluggable
-------------------	-----------

### Dimensions

Dimensional drawing	
Width	6.2 mm +0.1 mm
Height	39 mm
Depth	60.3 mm

### Material specifications

Flammability rating according to UL 94	V-0
Insulating material	PBT
Housing material	PBT

### Protective circuit

Direction of action	Line-Line & Line-Signal Ground/Shield & optional Signal Ground/Shield-Earth Ground
Maximum continuous voltage $U_C$	30 V DC
Rated current	5 A (55 °C)
Surge protection fault message	optical

### Environmental and real-life conditions

#### Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-40 °C ... 85 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C

# TTC-6P-3-EX-24DC-I-P - Surge protection plug



1064663

<https://www.phoenixcontact.com/us/products/1064663>

Altitude	≤ 2000 m (amsl)
Permissible humidity (operation)	5 % ... 95 %

## Standards and regulations

Standards/specifications	EN 60079-0
Standards/specifications	EN 60079-11

### EN 61643-21

Standards/specifications	EN 61643-21
Standards/specifications	IEC 60079-0
Standards/specifications	IEC 60079-11
Standards/specifications	IEC 61643-21

## Mounting

Mounting type	on base element
---------------	-----------------


# TTC-6P-3-EX-24DC-I-P - Surge protection plug

1064663


<https://www.phoenixcontact.com/us/products/1064663>

## Drawings

Circuit diagram

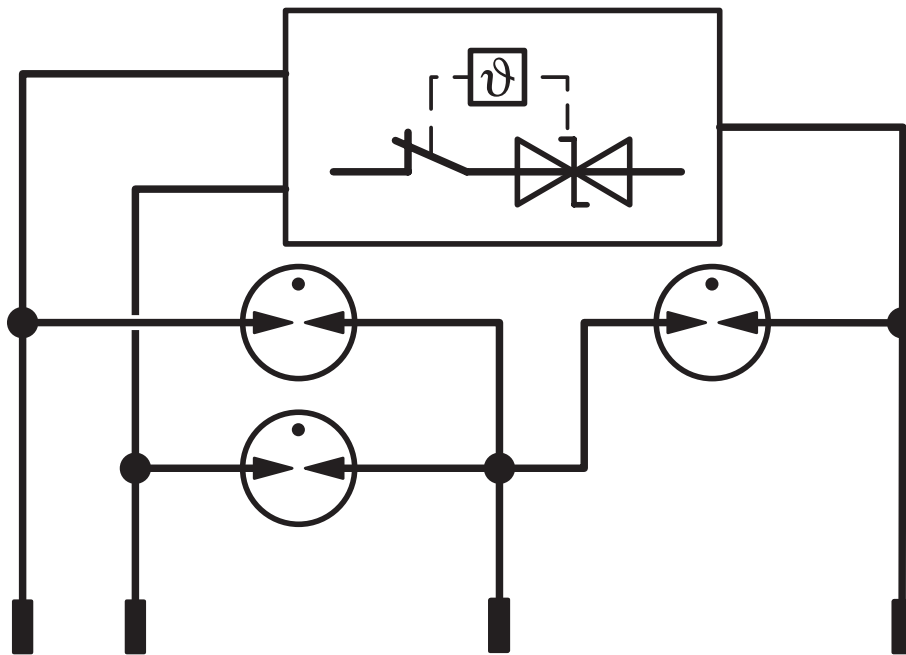

Dimensional drawing

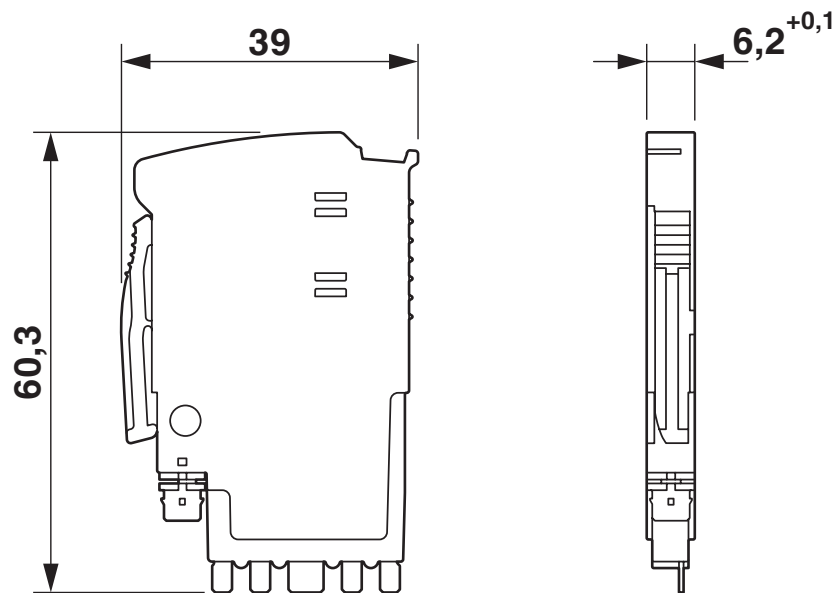

# TTC-6P-3-EX-24DC-I-P - Surge protection plug



1064663

<https://www.phoenixcontact.com/us/products/1064663>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1064663>



**UL Listed**

Approval ID: FILE E 138168



**IECEX**

Approval ID: IECEX BVS 16.0090X



**CCC**

Approval ID: 2020322316000780



**cUL Listed**

Approval ID: FILE E 333250



**UL Listed**

Approval ID: FILE E 333250



**ATEX**

Approval ID: BVS 16 ATEX E 125 X



**NEPSI-EX**

Approval ID: GYJ20.1114X

# TTC-6P-3-EX-24DC-I-P - Surge protection plug



1064663

<https://www.phoenixcontact.com/us/products/1064663>

## Classifications

### ECLASS

ECLASS-11.0	27130890
ECLASS-13.0	27171502

### ETIM

ETIM 8.0	EC002496
----------	----------

### UNSPSC

UNSPSC 21.0	39121600
-------------	----------

# TTC-6P-3-EX-24DC-I-P - Surge protection plug



1064663

<https://www.phoenixcontact.com/us/products/1064663>

## Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

# TTC-6P-3-EX-24DC-I-P - Surge protection plug



1064663

<https://www.phoenixcontact.com/us/products/1064663>

## Accessories

### X-PEN 0,35 - Marker pen

0811228

<https://www.phoenixcontact.com/us/products/0811228>



Marker pen without ink cartridge, for manual labeling of markers, labeling extremely wipe-proof, line thickness 0.35 mm

---

### ZBF 6 CUS - Zack Marker strip, flat

0825027

<https://www.phoenixcontact.com/us/products/0825027>



Zack Marker strip, flat, Strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10



# TTC-6P-3-EX-24DC-I-P - Surge protection plug

1064663

<https://www.phoenixcontact.com/us/products/1064663>

## ZBF 6:UNBEDRUCKT - Zack Marker strip, flat

0808710

<https://www.phoenixcontact.com/us/products/0808710>



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

---

## ZBF 6/WH-100:UNBEDRUCKT - Zack Marker strip, flat

0808736

<https://www.phoenixcontact.com/us/products/0808736>



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 1000

# TTC-6P-3-EX-24DC-I-P - Surge protection plug

1064663

<https://www.phoenixcontact.com/us/products/1064663>



## ZBF 6,QR:FORTL.ZAHLEN - Zack Marker strip, flat

0808765

<https://www.phoenixcontact.com/us/products/0808765>



Zack Marker strip, flat, Strip, white, labeled, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

---

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA

586 Fulling Mill Road

Middletown, PA 17057, United States

(+717) 944-1300

[info@phoenixcon.com](mailto:info@phoenixcon.com)