

IPD W 3P2,5 M M25 BK - Panel feed-through



1088681

<https://www.phoenixcontact.com/us/products/1088681>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Panel feed-through, Push-in connection, number of positions: 2+PE, 0.5 mm² ... 2.5 mm², 500 V, 20 A, black, assembly thread: M25, Push-in connection

Your advantages

- Convenient: quick and easy assembly without special tools

Commercial Data

Item number	1088681
Packing unit	1 pc
Minimum order quantity	1 pc
Sales Key	BF51
Product Key	BF6LAA
GTIN	4055626890975
Weight per Piece (including packing)	36.9 g
Weight per Piece (excluding packing)	35 g
Customs tariff number	85366990
Country of origin	CN

IPD W 3P2,5 M M25 BK - Panel feed-through



1088681

<https://www.phoenixcontact.com/us/products/1088681>

Technical Data

Product properties

Product type	Panel feed-through
Product family	IPD
Number of positions	3
Connection profile	2+PE
Position marking	L, N, PE
Number of connections per position	1
Locking type	Snap-in locking
Series	IPD

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Connection data

Connection technology

Connection technology	Push-in connection
Connection system, internal	Push-in connection
Frequency of connections between conductors of the same cross section	10

Conductor connection

Conductor cross section flexibel	0.5 mm ² ... 2.5 mm ²
Conductor cross section solid	0.5 mm ² ... 2.5 mm ²
Connection cross section AWG	20 ... 14

Electrical properties

Rated surge voltage (III/3)	6 kV
Rated current	20 A
Rated voltage (III/3)	500 V
Nominal voltage U _N	500 V AC
	500 V DC
Nominal current I _N	20 A

Material specifications

Color Housing	black
Contact material	Cu
Contact surface material	Ni/Ag/Sn
Material (GRP)	PA

Cable/line

Position marking	L, N, PE
------------------	----------

IPD W 3P2,5 M M25 BK - Panel feed-through



1088681

<https://www.phoenixcontact.com/us/products/1088681>

Mounting

Mounting type	M25
Connection method	Push-in connection

Environmental and real-life conditions

Ambient conditions


Degree of protection	IP66
	IP68 (2 m / 24 h)
	IP69K
Ambient temperature (operation)	-30 °C ... 100 °C
Temperature when conductor connected	-5 °C ... 50 °C
Ambient temperature (storage/transport)	-30 °C ... 100 °C

1088681

<https://www.phoenixcontact.com/us/products/1088681>


Drawings

Diagram

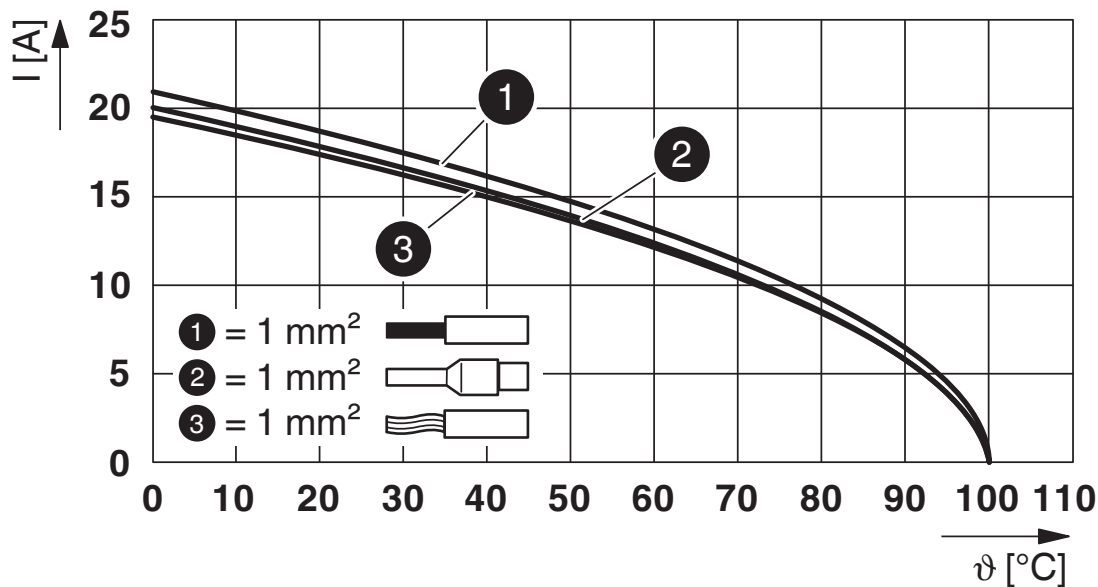

Derating diagram for 1.0 mm²

Diagram

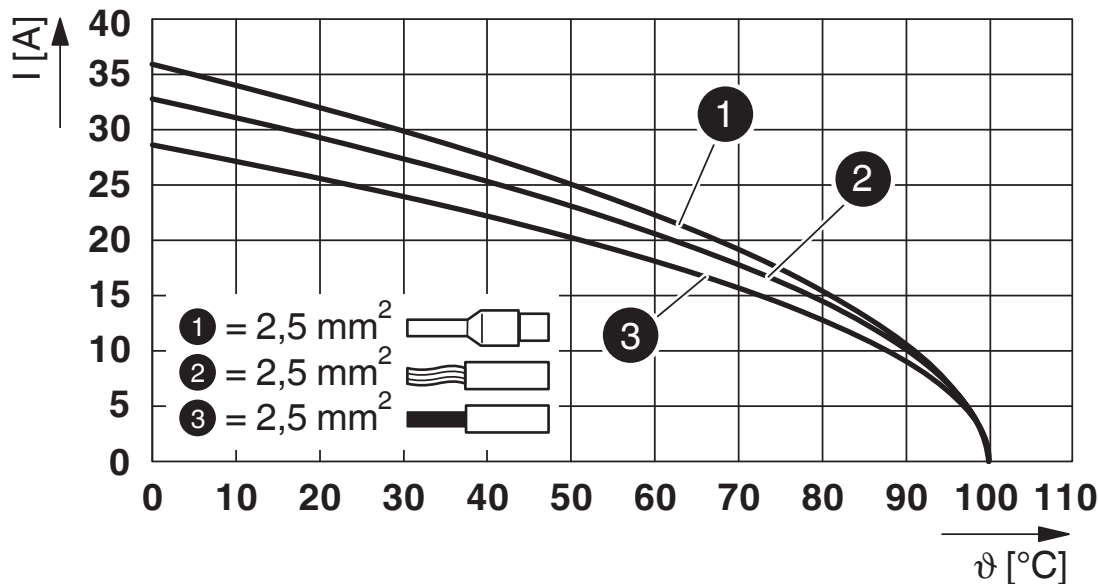


Derating diagram for 2.5 mm²

IPD W 3P2,5 M M25 BK - Panel feed-through



1088681

<https://www.phoenixcontact.com/us/products/1088681>

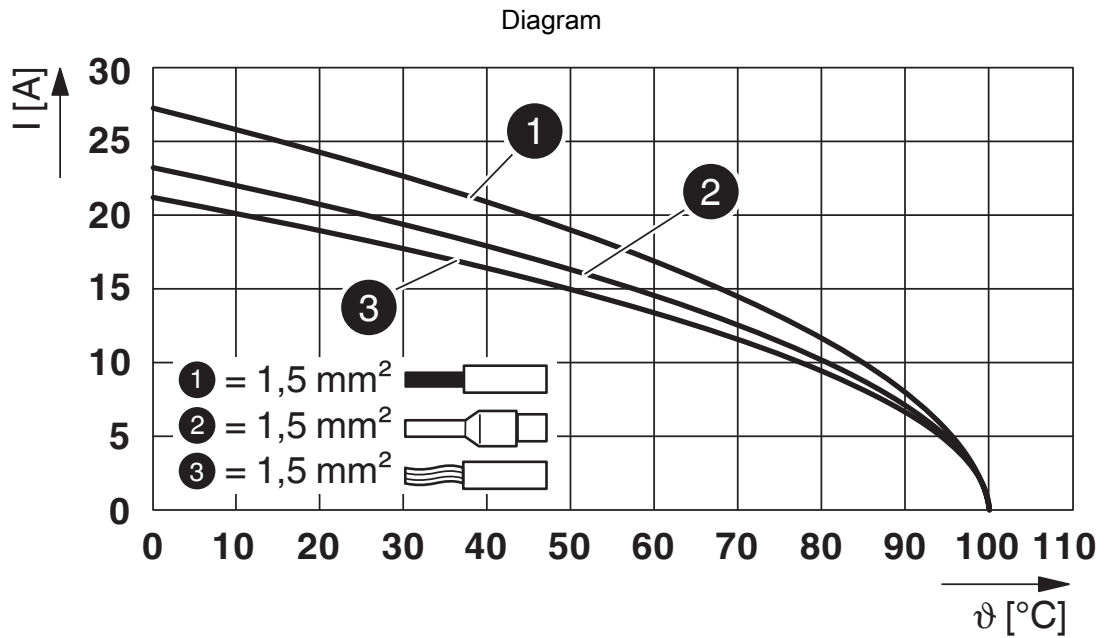

Derating diagram for 1.5 mm²

IPD W 3P2,5 M M25 BK - Panel feed-through



1088681

<https://www.phoenixcontact.com/us/products/1088681>

Classifications

ECLASS

ECLASS-11.0	27440602
ECLASS-12.0	27440602
ECLASS-13.0	27440602

ETIM

ETIM 8.0	EC002566
----------	----------

UNSPSC

UNSPSC 21.0	39121500
-------------	----------

IPD W 3P2,5 M M25 BK - Panel feed-through



1088681

<https://www.phoenixcontact.com/us/products/1088681>

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

IPD W 3P2,5 M M25 BK - Panel feed-through

1088681

<https://www.phoenixcontact.com/us/products/1088681>

Mandatory Accessories

IPD PL 3P2,5 F BK - Connector

1088666

<https://www.phoenixcontact.com/us/products/1088666>



Connector, Push-lock connection, number of positions: 2+PE, 0.5 mm² ... 2.5 mm², 500 V, 20 A, black, external cable diameter: 6 mm ... 9 mm and 8 mm ... 13 mm, Push-lock connection

Accessories

SZF 1-0,6X3,5 - Screwdriver

1204517

<https://www.phoenixcontact.com/us/products/1204517>



Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

IPD W 3P2,5 M M25 BK - Panel feed-through



1088681

<https://www.phoenixcontact.com/us/products/1088681>

CRIMPFOX CENTRUS 6S - Crimping pliers

1213144

<https://www.phoenixcontact.com/us/products/1213144>



Crimping pliers, for uninsulated and insulated ferrules, DIN 46228 Part 1 and 4, from 0.14 mm² ... 6 mm², also for TWIN ferrules up to 2 x 4 mm², automatic cross section adjustment, lateral insertion, equipped with fall protection

SEALING PLUG 10X16 RD - Closing cap

1400284

<https://www.phoenixcontact.com/us/products/1400284>



Closing cap, for threads pluggable, color: red

IPD W 3P2,5 M M25 BK - Panel feed-through



1088681

<https://www.phoenixcontact.com/us/products/1088681>

SEALING PLUG 7X16 RD - Closing cap

1400255

<https://www.phoenixcontact.com/us/products/1400255>

Closing cap, color: red



ZBF 4:UNBEDRUCKT - Zack Marker strip, flat

0808587

<https://www.phoenixcontact.com/us/products/0808587>

Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: CMS-P1-PLOTTER, PLOTMARK, mounting type: snapped, for terminal block width: 4 mm, lettering field size: 4.2 x 5.2 mm, Number of individual labels: 10



IPD W 3P2,5 M M25 BK - Panel feed-through




1088681

<https://www.phoenixcontact.com/us/products/1088681>

UC-TMF 4 - Marker for terminal blocks

0818166

<https://www.phoenixcontact.com/us/products/0818166>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 4.2 mm, lettering field size: 3.6 x 5.1 mm, Number of individual labels: 120

UCT-TMF 4 - Marker for terminal blocks

0828742

<https://www.phoenixcontact.com/us/products/0828742>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 4.2 mm, lettering field size: 3.4 x 4.7 mm, Number of individual labels: 90

IPD W 3P2,5 M M25 BK - Panel feed-through



1088681

<https://www.phoenixcontact.com/us/products/1088681>

QSS 22 - Socket wrench

1670206

<https://www.phoenixcontact.com/us/products/1670206>



Allen wrench, for loosening and fastening the QUICKON union nut, WAF 22 mm

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA

586 Fulling Mill Road

Middletown, PA 17057, United States

(+717) 944-1300

info@phoenixcon.com