

1288248

https://www.phoenixcontact.com/us/products/1288248

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



CHARX connect standard, Repair kit, Accessories, with DC contact holder with integrated front part of the DC contacts, with replaceable mating face frame, with 5x M4X10 rounded head screws with Torx security drive, for replacement of the mating face frame of vehicle charging connectors, CCS type 1, IEC 62196-3, SAE J1772, Screw mounting, housing: black, The vehicle connector housing does not have to be opened in order to replace the mating face frame.

#### Product description

Repair kit with replaceable mating face frame for CCS type 1 DC vehicle charging connector

#### Your advantages

- · Complete product range
- · Developed and produced in accordance with the IATF 16949 automotive standard and ISO 9001
- · Maintenance-friendly replacement of the mating face frame without draining the coolant

#### Commercial data

Item number	1288248
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	EM01
Product key	XWBAFB
GTIN	4063151514082
Weight per piece (including packing)	260.8 g
Customs tariff number	85389099
Country of origin	DE



https://www.phoenixcontact.com/us/products/1288248



#### Technical data

#### Notes

General	The vehicle connector housing does not have to be opened in
	order to replace the mating face frame.

#### Product properties

Product type	Repair kit
Product family	CHARX connect standard
Application	for replacement of the mating face frame of vehicle charging connectors
Туре	Accessories
Design	with DC contact holder with integrated front part of the DC contacts
	with replaceable mating face frame
	with 5x M4X10 rounded head screws with Torx security drive
Technology	Combined Charging System
Charging standard	CCS type 1
Charging mode	Mode 4

#### Material specifications

Color (Housing)	black (9005)
Material (Housing)	Plastic

#### Environmental and real-life conditions

#### Ambient conditions

Ambient temperature (operation)	-30 °C 50 °C
Ambient temperature (storage/transport)	-40 °C 80 °C

#### Standards and regulations

#### Standards

Standards/regulations	IEC 62196-3
	SAE J1772

#### Mounting

Mounting type Screw mounting
------------------------------




https://www.phoenixcontact.com/us/products/1288248



## Drawings



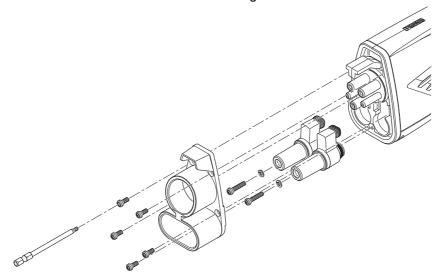

Assembly drawing



1288248

https://www.phoenixcontact.com/us/products/1288248

### Classifications

UNSPSC 21.0

#### **ECLASS**

ECLASS-11.0	27144792
ECLASS-12.0	27144792
ECLASS-13.0	27144792
ETIM	
ETIM 8.0	EC002884
UNSPSC	

39121500



https://www.phoenixcontact.com/us/products/1288248



### Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Phoenix Contact 2023 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com