

Park position - EV-T1AC-PARK - 1624139

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Park position, Retainer for Vehicle Connector as parking position at charging stations (EVSE), Type 1, SAE J1772, Front mounting


Product Description

Retainer for Vehicle Connector as parking position at charging stations for E-Mobility (EVSE)

Your advantages

- Certified in accordance with IATF 16949:2016 and ISO 9001:2015

Key Commercial Data

| | |
|--------------------------------------|---|
| Packing unit | 1 pc |
| GTIN |  4 055626 241555 |
| GTIN | 4055626241555 |
| Weight per Piece (excluding packing) | 72.000 g |
| Custom tariff number | 39269097 |
| Country of origin | Germany |
| Note | Made to Order (non-returnable) |

Technical data

Product definition

| | |
|-----------------------|--|
| Application | Retainer for Vehicle Connector as parking position at charging stations (EVSE) |
| Standards/regulations | SAE J1772 |
| Charging standard | Type 1 |
| Charging mode | Mode 3 |

Dimensions

| | |
|--------|---------|
| Height | 75 mm |
| Width | 75 mm |
| Depth | 37.5 mm |

Park position - EV-T1AC-PARK - 1624139

Technical data

Dimensions

| | |
|-----------------|---------------|
| Bore dimensions | 60 mm x 60 mm |
|-----------------|---------------|

Ambient conditions

| | |
|---|------------------|
| Ambient temperature (operation) | -30 °C ... 50 °C |
| Ambient temperature (storage/transport) | -40 °C ... 80 °C |
| Degree of protection | IP54 |

Mechanical properties

| | |
|----------------------------------|-----------------------------|
| Vehicle Connector fixing | With actuation lever |
| Removal of the Vehicle Connector | Lever actuation and removal |

Mounting

| | |
|-----------------------------------|--|
| Possible mounting positions | Front mounting |
| Restrictions to mounting position | Only 0 to 45 degree frontal inclination possible, see figure |
| Mounting hole diameter | 6.00 mm (ø) |

Design

| | |
|---------------------|------------|
| Housing color | black |
| Customer variations | On request |

Material

| | |
|---------------------|---------|
| Material | Plastic |
| Flammability rating | V0 |


Environmental Product Compliance

| | |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
| | No hazardous substances above threshold values |

Drawings

Park position - EV-T1AC-PARK - 1624139

Dimensional drawing

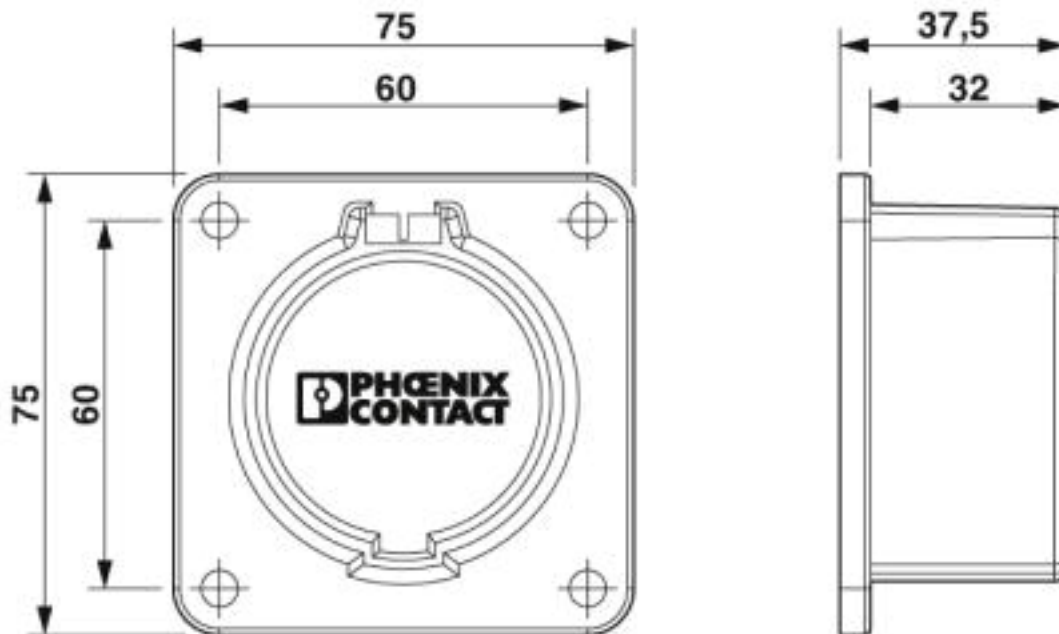

Dimensional drawing

Classifications

eCl@ss

| | |
|---------------|----------|
| eCl@ss 10.0.1 | 27144792 |
| eCl@ss 4.0 | 27140800 |
| eCl@ss 4.1 | 27140800 |
| eCl@ss 5.0 | 27143400 |
| eCl@ss 5.1 | 27143400 |
| eCl@ss 6.0 | 27143400 |
| eCl@ss 7.0 | 27449001 |
| eCl@ss 8.0 | 27449001 |
| eCl@ss 9.0 | 27144792 |

ETIM

| | |
|----------|----------|
| ETIM 2.0 | EC000241 |
| ETIM 3.0 | EC002061 |
| ETIM 4.0 | EC002061 |
| ETIM 5.0 | EC002839 |
| ETIM 6.0 | EC002884 |
| ETIM 7.0 | EC002884 |

UNSPSC

| | |
|-------------|----------|
| UNSPSC 6.01 | 30211923 |
|-------------|----------|

Park position - EV-T1AC-PARK - 1624139

Classifications

UNSPSC

| | |
|---------------|----------|
| UNSPSC 7.0901 | 39121522 |
| UNSPSC 11 | 39121522 |
| UNSPSC 12.01 | 39121522 |
| UNSPSC 13.2 | 39121522 |
| UNSPSC 18.0 | 39121522 |
| UNSPSC 19.0 | 39121522 |
| UNSPSC 20.0 | 39121522 |
| UNSPSC 21.0 | 39121522 |