

# PLD M 260 W-85/95 365/D40

**LED machine light, 24 V DC, IP67 protection,  
85°/95° emission angle, 40 mm diameter,  
M12 connector**



Data sheet  
107000\_en\_00

© PHOENIX CONTACT 2015-12-18

## 1 Description

This LED machine light is designed to provide illumination inside or on machinery.

You can use the light in harsh environments.

This is possible thanks to:

- The high degree of protection
- Resistance to common cooling agents and lubricants
- Resistance to vibrations and shock
- The 4 mm thick safety glass

The small diameter of just 40 mm enables mounting even where space is at a premium.

Mounting is by means of holders or brackets (neither of which are supplied as standard) in which the light can swivel and the lighting can therefore be optimally aligned.

### Features

- Length: 365 mm
- Diameter: 40 mm
- 24 V DC supply voltage
- M12 connectors
- Color temperature 5000 K
- Emission angle 85°/95°
- Can be swiveled up to  $\pm 45^\circ$  using accessories
- Resistant to cooling agents and lubricants
- IP67 degree of protection



Make sure you always use the latest documentation.  
It can be downloaded from the product at [phoenixcontact.net/products](https://phoenixcontact.net/products).

**2 Table of contents**

1	Description .....	1
2	Table of contents .....	2
3	Ordering data .....	3
4	Technical data .....	3
5	Illuminance distribution and luminous intensity distribution.....	5
6	Safety notes.....	6
7	Mount light .....	6
8	Connecting the supply voltage.....	7

### 3 Ordering data

Description	Type	Order No.	Pcs./Pkt.
LED machine light, 24 V DC, Degree of protection IP67, Emission angle 85 °/95 °, Color temperature 5000 K, Length 365 mm, Diameter 40 mm, M12 connector, Light housing: Anodized aluminum, Pane: Single-pane safety glass (ESG, thermally toughened float glass), pivoting, Resistant to coolants and lubricants	PLD M 260 W-85/95 365/D40	2702481	1

mandatory product	Type	Order No.	Pcs./Pkt.
-------------------	------	-----------	-----------




The PLD M-ME MC/D40 mounting holder (Order No. 2702491) or the PLD M-ME MB/D40 mounting bracket (Order No. 2702527) is required in order to mount the light.

Mounting holder, for machine lights PLD M 260 .../D40, Swiveling range ±20°	PLD M-ME MC/D40	2702492	1
Mounting brackets, for machine lights PLD M 260 .../D40, Swiveling range ±45°	PLD M-ME MB/D40	2702527	1

Accessories	Type	Order No.	Pcs./Pkt.
Sensor/Actuator cable, 4-position, PUR halogen-free, black-gray RAL 7021, free cable end, on Socket straight M12, A-coded, Cable length: 1.5 m	SAC-4P- 1,5-PUR/M12FS	1668108	1
Sensor/Actuator cable, 4-position, PUR halogen-free, black-gray RAL 7021, free cable end, on Socket straight M12, A-coded, Cable length: 3 m (Cable/conductor)	SAC-4P- 3,0-PUR/M12FS	1668111	1
Sensor/Actuator cable, 4-position, PUR halogen-free, black-gray RAL 7021, free cable end, on Socket straight M12, A-coded, Cable length: 5 m (Cable/conductor)	SAC-4P- 5,0-PUR/M12FS	1668124	1
Sensor/Actuator cable, 4-position, PUR halogen-free, black-gray RAL 7021, free cable end, on Socket angled M12, A-coded, Cable length: 1.5 m	SAC-4P- 1,5-PUR/M12FR	1668221	1
Sensor/Actuator cable, 4-position, PUR halogen-free, black-gray RAL 7021, free cable end, on Socket angled M12, A-coded, Cable length: 3 m	SAC-4P- 3,0-PUR/M12FR	1668234	1
Sensor/Actuator cable, 4-position, PUR halogen-free, black-gray RAL 7021, free cable end, on Socket angled M12, A-coded, Cable length: 5 m	SAC-4P- 5,0-PUR/M12FR	1668247	1

### 4 Technical data

#### Dimensions (nominal sizes in mm)

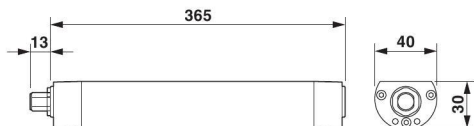

Length	365 mm
Diameter	40 mm
Width	40 mm
Height	30 mm
Note on dimensions	Length without M12 flush-type connector

### General data

Weight	0.5 kg
Color	aluminum color
Ambient temperature (operation)	0 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 75 °C
Permissible humidity (operation)	95 %
Permissible humidity (storage/transport)	95 % (non-condensing)
Air pressure (operation)	69 kPa ... 102 kPa
Air pressure (storage/transport)	69 kPa ... 102 kPa
Degree of protection	IP67
Protection class	III, IEC 61140, EN 61140, VDE 0140-1
Mounting position	any
Mounting type	Screw mounting (Mounting with mounting holders or mounting brackets, please observe the notes in the package slip.)
Material	Anodized aluminum (Light housing) Single-pane safety glass (ESG, thermally toughened float glass) (Pane)

### Special properties

pivoting (with mounting accessories)  
Resistant to coolants and lubricants

### Connection data

Connection method	M12 connector
Connection method	M12 connector, (A-coded)
Number of positions	4

### Power supply for module electronics

Supply voltage	24 V DC
Supply voltage range	20 V DC ... 28 V DC
Current consumption	typ. 0.44 A (at 24 V DC)
Power consumption	approx. 10.5 W (at 24 V DC)
Surge protection	Varistor and suppressor diode, 36 V DC
Protection against polarity reversal	Polarity protection diode

### Light properties

Source of light type	LED
Number of LEDs	27
Service life, lighting appliance	60000 h (L70)
Light color	Neutral white
Color temperature	5000 K
Color rendering index	80
Luminous flux	approx. 1080 lm (Net luminous flux)
Luminous efficacy	approx. 103 lm/W
Energy efficiency class	A+
Average illumination	348 lx (Distance of 1 m over 1 m <sup>2</sup> area)
Illumination	max. 477 lx (Distance of 1 m) min. 207 lx (Distance of 1 m over 1 m <sup>2</sup> area)
Emission angle	85 ° / 95 °

**Mechanical tests**

Vibration resistance in acc. with EN 60068-2-6/IEC 60068-2-6	4g
Shock in acc. with EN 60068-2-27/IEC 60068-2-27	50g

**Conformance with EMC Directive 2004/108/EC (valid until 19.04.2016) / 2014/30/EU (valid from 20.04.2016)**

**Noise immunity test in accordance with EN 61547**

Electrostatic discharge (ESD) EN 61000-4-2/IEC 61000-4-2	Criterion B, 4 kV contact discharge, 8 kV air discharge
Electromagnetic fields EN 61000-4-3/IEC 61000-4-3	Criterion A, field strength: 3 V/m
Fast transients (burst) EN 61000-4-4/IEC 61000-4-4	Criterion B, ±0.5 kV
Conducted interference EN 61000-4-6/IEC 61000-4-6	Criterion A, test voltage 3 V

**Noise emission test according to EN 61000-6-3**

Radio interference properties EN 55015	Class B
--	---------

**Approvals**

For the latest approvals, please visit [phoenixcontact.net/products](http://phoenixcontact.net/products).

**5 Illuminance distribution and luminous intensity distribution**

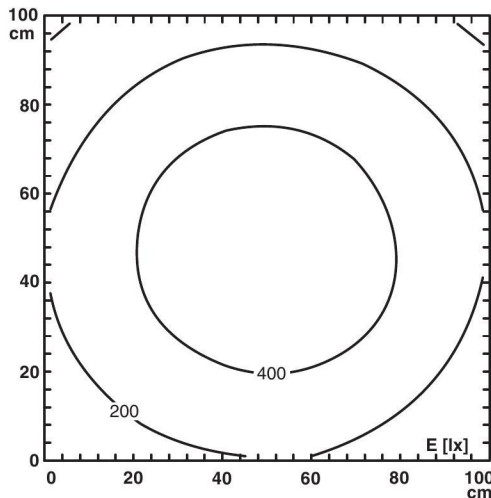


Figure 1 Illuminance distribution (Distance d = 1 m)

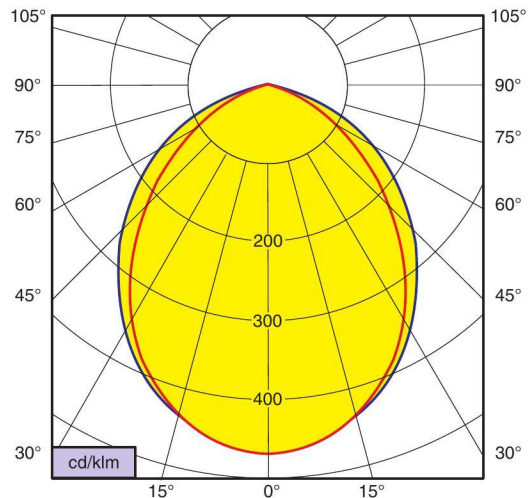


Figure 2 Luminous intensity distribution (LID) (red line: C0 - C180, blue line: C90 - C270)

## 6 Safety notes



### WARNING: Explosion hazard

- Do not install and operate the light in potentially explosive spaces!



### WARNING: danger of electric shock

- Electrical work may only be performed by qualified electricians.
- Perform all work on the light with it de-energized!



### CAUTION: Risk of glare due to bright light source

Looking directly at the light source can lead to temporarily limited vision and after-images. This can lead to irritation, nuisances, adverse effects, and accidents.

- Do not look at the light source!
- Position the light so as to avoid looking directly into the light source!



### NOTE: damage due to exposure to direct sunlight

Exceeding the permissible ambient temperature shortens the service life of the electronic components.

- Do not expose the light to direct sunlight!



### CAUTION: Damage due to incident laser beam

Being struck directly or indirectly by a laser beam can destroy the LED.

- Only use the light outside of the effective range of high-power lasers such as cutting lasers or welding lasers!

## 7 Mount light

Mounting holders and mounting brackets are available as mounting elements. These cannot be used in combination. Use either mounting holders or mounting brackets.

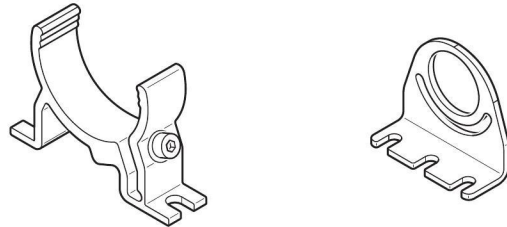


Figure 3 Mounting holder and mounting bracket



### CAUTION: risk of injury or material damage due to falling light

Strong vibrations or impacts in particular can cause a vertically mounted light to slip and cause personal injury or material damage.

- Only use the mounting elements available as accessories!
- Vertical mounting: install additional mounting holders or use mounting brackets.

Mount the light as specified in the package slip.

## 8 Connecting the supply voltage

To connect the supply voltage, connect the M12 socket of the cable to the A-coded connector of the light.



### CAUTION: Damage due to incorrect connection

Incorrect connection voltage or polarity can damage or destroy the light.

- Only connect the light when the operating unit is switched off!
- Only operate the light with safety extra-low voltage (SELV)!
- Ensure that the connection voltage corresponds to the nominal voltage given on the ratings plate!
- Pay attention to the correct polarity!
- Use a class 2 power supply unit when the light is used on the North American market!



### CAUTION: Damage due to penetrating humidity

- Ensure the tightness of the cable feed!
- Use a plug connection that provides at least the IP67 degree of protection!
- Mount the connecting cable and the plug connection correctly!
- Avoid a transverse load on the plug connection!

### Pin assignment




Figure 4 Pin assignment

Pin	Assignment
1	24 V DC
2	Not used
3	GND
4	Not used