

STEP-DIODE/5-24DC/2X5/1X10


Order No.: 2868606



<http://catalog.phoenixcontact.net/phoenix/treeViewClick.do?UID=2868606>

Redundancy module, 5-24 V DC, 2x 5 A, 1x 10 A



Commercial data	
EAN	 4 046356 583923
sales group	H011
Pack	1 Pcs.
Customs tariff	85044082
Gross weight in pieces	0.0737 KG
Net weight per piece	0.0737 KG
Catalog page information	Page 211 (CAT-6-2013)

Product notes

WEEE/RoHS-compliant since:
06/04/2010



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
Dimensions	
Width	18 mm
Height	90 mm
Depth	61 mm

Input data

Nominal input voltage range	5 V DC ... 24 V DC
	4.5 V DC ... 30 V DC
Nominal input current I_N	2x 5 A (-25°C ... 55°C)
	1x 10 A (-25°C ... 55°C)
	2x 5 A (-25°C ... 55°C)
	1x 10 A (-25°C ... 55°C)

Output data

Output current	10 A (Increasing power)
	5 A (Redundancy)
Derating	55 °C ... 70 °C (2.5%/K)
Power loss nominal load max.	2.5 W ($I_{OUT} = 5 A$)

General

Net weight	0.1 kg
Efficiency	> 97 %
	> 97 %
Degree of protection	IP20
Protection class	III
Ambient temperature (operation)	-25 °C ... 70 °C (> 55° C derating)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Max. permissible relative humidity (operation)	≤ 95 % (at 25 °C, no condensation)
Mounting position	horizontal DIN rail NS 35, EN 60715
Assembly instructions	Alignable: 0 mm horizontally, 30 mm vertically
Electromagnetic compatibility	Conformance with EMC Directive 2004/108/EC
Standard - Electrical safety	IEC 60950-1/VDE 0805 (SELV)
Standard – Electronic equipment for use in electrical power installations and their assembly into electrical power installations	EN 50178/VDE 0160 (PELV)
UL approvals	UL/C-UL listed UL 508
	UL/C-UL Recognized UL 60950

Connection data, input

Connection method	Screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section stranded min.	0.2 mm ²

Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	6.5 mm
Screw thread	M3

Connection data, output

Connection method	Screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	6.5 mm

Certificates / Approvals



Certification


cULus Listed, cULus Recognized

Certifications applied for:

Certification Ex:

Drawings

Block diagram

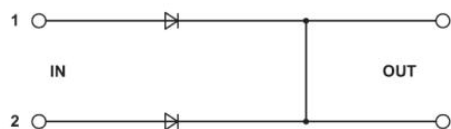

Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2013 Phoenix Contact
Technical modifications reserved;