2909573

https://www.phoenixcontact.com/us/products/2909573

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Relay extension module for ELR-...-P hybrid motor starters, feedback of forward and reverse running when control signal is present, Push-in connection, DIN rail connector included

Commercial data

Item number	2909573
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	C472
Product key	CK7485
Catalog page	Page 26 (C-5-2019)
GTIN	4055626445489
Weight per piece (including packing)	152 g
Weight per piece (excluding packing)	122.36 g
Customs tariff number	85364190
Country of origin	DE

PHŒNIX

2909573

https://www.phoenixcontact.com/us/products/2909573



Technical data

Product properties

Product type	Extension module
Product family	CONTACTRON

Electrical properties

Insulation characteristics	
Rated insulation voltage	250 V
Rated surge voltage	4 kV
Degree of pollution	2

Output data

Contact switching type	1 changeover contact
Rated operating voltage U _e	24 V DC
	230 V AC
Switching capacity in accordance with IEC 60947-5-1	3 A (230 V, AC15)
	2 A (24 V (DC13))

Connection data

Load circuit		
Connection method	Push-in connection	
Stripping length	10 mm	
Conductor cross section rigid	0.2 mm ² 2.5 mm ²	
Conductor cross section flexible	0.2 mm ² 2.5 mm ²	
Conductor cross section AWG	24 14	

INTERFACE system

Connection method	DIN rail bus connectors
Number of connections	1
Number of positions	5

Dimensions

Width	22.5 mm
Height	106.6 mm
Depth	113.7 mm

Environmental and real-life conditions

Ambient conditions		
Degree of protection	IP20	
Ambient temperature (operation)	-25 °C 70 °C	
Ambient temperature (storage/transport)	-40 °C 80 °C	



https://www.phoenixcontact.com/us/products/2909573



Approvals


UKCA		
Certificate	UKCA-compliant	
UL approval		
Certificate	NLDX.E228652	
	NRNT.E172140	
UL data		
Category code	NLDX / NRNT	
Ambient temperature (operation)	-25 °C 55 °C	
Standards and regulations		
Standards/regulations	IEC 60947-5-1	
Mounting		
Mounting type	DIN rail mounting	
Assembly note	in rows with zero spacing	
Mounting position	Vertical (horizontal DIN rail)	

2909573

https://www.phoenixcontact.com/us/products/2909573



Drawings

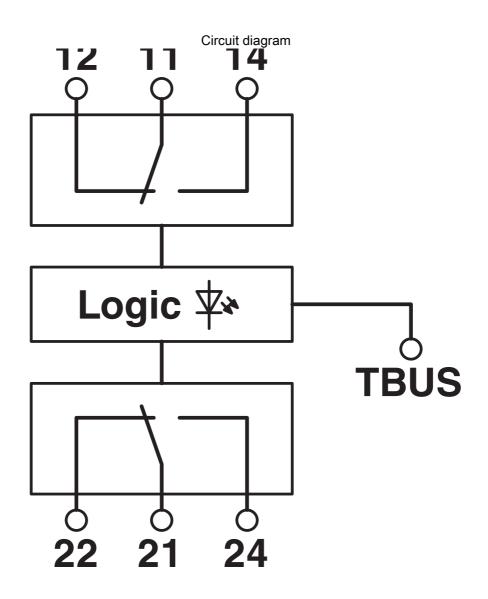



2909573

https://www.phoenixcontact.com/us/products/2909573

Approvals

🌣 To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/2909573

EAC	EAC Approval ID: RU*DE.*08.B.01536/19
	UL Listed Approval ID: FILE E 172140
· B	CUL Listed Approval ID: FILE E 172140
B	CUL Listed Approval ID: E228652
	UL Listed Approval ID: E228652
	VDE approval of drawings Approval ID: 40054426

2909573

https://www.phoenixcontact.com/us/products/2909573



Classifications

ECLASS

ECLASS-11.0	27371601
ECLASS-12.0	27371601
ECLASS-13.0	27371601

ETIM

	ETIM 9.0	EC001437	
UN	UNSPSC		
	UNSPSC 21.0	39122300	

2909573

https://www.phoenixcontact.com/us/products/2909573

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-l
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	f4ed0bca-5bb1-460f-8b37-7fcd8e7d68cd

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com

