

MW 35/27 - Mounting bracket

5040065

<https://www.phoenixcontact.com/us/products/5040065>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Plastic mounting bracket, with NS 35/7.5 DIN rail, to snap onto modular terminal blocks with a universal foot, profile length: 27 mm

Commercial data

| | |
|--------------------------------------|--------------------------------|
| Item number | 5040065 |
| Packing unit | 10 pc |
| Minimum order quantity | 10 pc |
| Note | Made to order (non-returnable) |
| Sales key | BE64 |
| Product key | BE64UX |
| GTIN | 4017918167370 |
| Weight per piece (including packing) | 8.89 g |
| Weight per piece (excluding packing) | 8.39 g |
| Customs tariff number | 85369010 |
| Country of origin | DE |

MW 35/27 - Mounting bracket

5040065


<https://www.phoenixcontact.com/us/products/5040065>

Technical data

Product properties

| | |
|--------------|------------------|
| Product type | Assembly adapter |
|--------------|------------------|

Dimensions

| | |
|---------------------|--|
| Dimensional drawing |  |
| Width | 45 mm |
| Height | 27 mm |
| Depth | 46.5 mm |
| Length | 27 mm |

Material specifications

| | |
|--|----|
| Flammability rating according to UL 94 | HB |
|--|----|

Environmental and real-life conditions

Ambient conditions

| | |
|--|---|
| Ambient temperature (operation) | -60 °C ... 85 °C |
| Ambient temperature (storage/transport) | -25 °C ... 55 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C) |
| Ambient temperature (assembly) | -5 °C ... 70 °C |
| Ambient temperature (actuation) | -5 °C ... 70 °C |
| Permissible humidity (storage/transport) | 30 % ... 70 % |

MW 35/27 - Mounting bracket


5040065

<https://www.phoenixcontact.com/us/products/5040065>



Drawings

Dimensional drawing

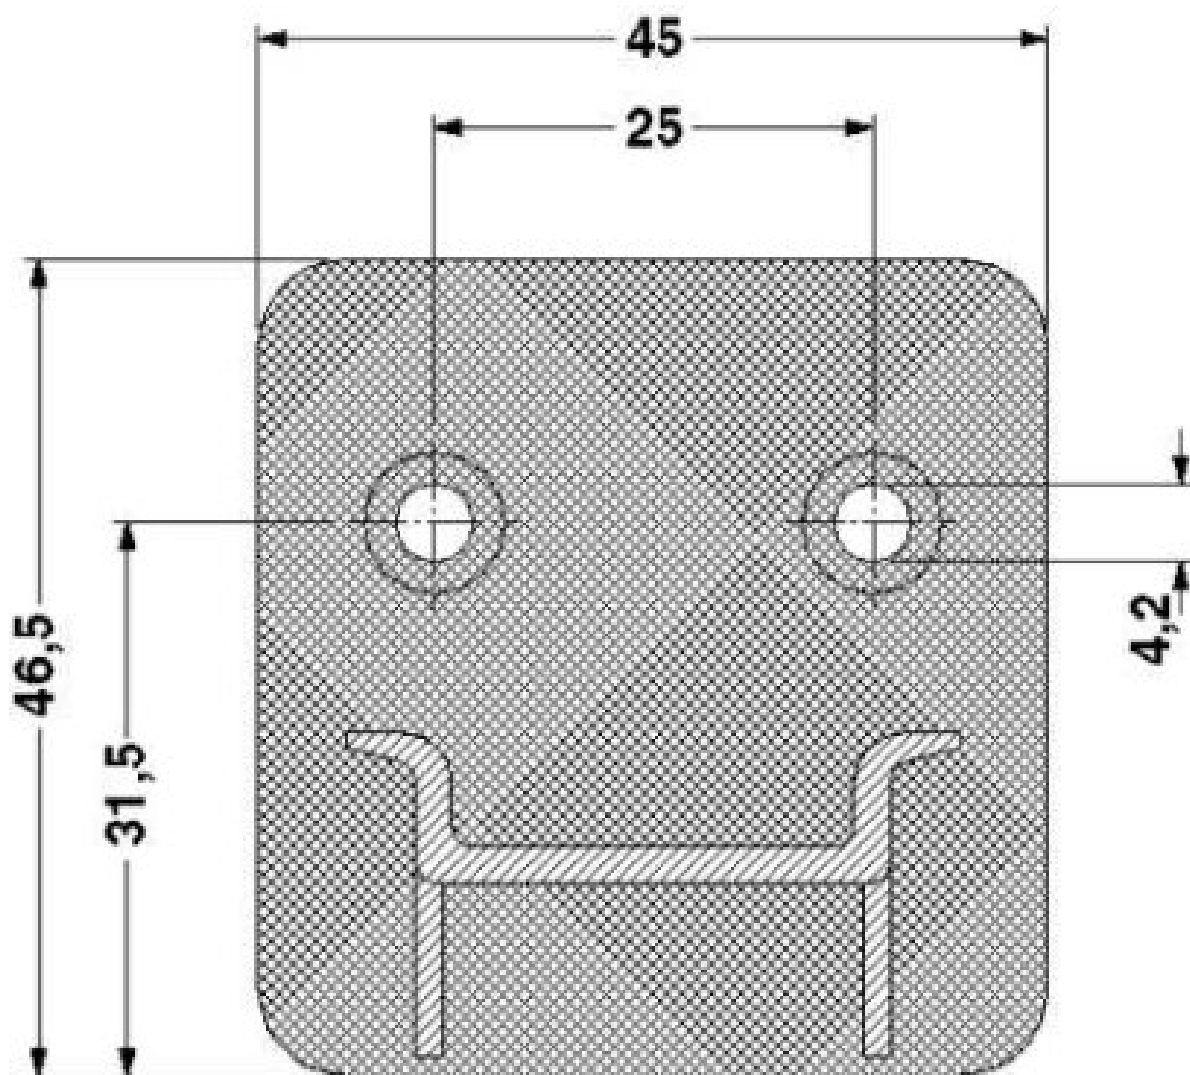

MW 35/27 - Mounting bracket



5040065

<https://www.phoenixcontact.com/us/products/5040065>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27141190 |
| ECLASS-12.0 | 27141190 |
| ECLASS-13.0 | 27141190 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC002848 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

MW 35/27 - Mounting bracket



5040065

<https://www.phoenixcontact.com/us/products/5040065>

Environmental product compliance

EU RoHS

| | |
|---|--------------------|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|---|--------------------|

China RoHS

| | |
|--|--|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|-------------------------------------|----------------------------|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |
|-------------------------------------|----------------------------|

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com