

Product data sheet

Specifications

SQUARE D



Switch, manual, 30A, 2 pole, 3 HP at 575 VAC, single phase, toggle operated, red 115 VAC indicator, NEMA 4, two conduit

2510KW1AH

Product availability: Stock - Normally stocked in distribution facility

Price*: 481.34 USD

Main

| | |
|---------|---------------------------|
| Product | Single Unit Manual Switch |
| Type | K |

Complementary

| | |
|------------------------|--|
| Current Rating | 30 A |
| Cable Entry | 0.75 NPT (top and bottom) |
| Horsepower Rating | 2 hp 115 V AC 2 hp 230 V AC 3 hp 460 V AC 3 hp 575 V AC 1 hp 90 V DC 2 hp 115 V DC 1.5 hp 230 V DC |
| Maximum Voltage Rating | 600 V AC 230 V DC |
| Number Of Poles | 2P |
| Control Unit Type | Toggle |
| Number Of Phases | 1 phase |
| Pilot Light | Red indicator, 115 V |
| Starter Type | Non reversing |
| Electrical Connection | Screw clamp terminals |
| Wire Gauge | AWG 14...AWG 10 copper |
| Height | 4.38 in (111.25 mm) |
| Width | 3 in (76.20 mm) |
| Depth | 4.56 in (115.82 mm) |

Environment

| | |
|-----------------------|---|
| Certifications | UL listed file E42243 CCN NLRV CSA LR25490 class 3211 05 |
| Nema Enclosure Rating | NEMA 4 die cast zinc alloy standard size |

Ordering and shipping details

| | |
|-------------------|------------------------|
| Category | 21102-2510,2511,2512 K |
| Discount Schedule | CP1 |

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

| | |
|--------------------------|--------------|
| Gtin | 785901734871 |
| Returnability | No |
| Country Of Origin | MX |

Packing Units

| | |
|-------------------------------------|-----------------------|
| Unit Type Of Package 1 | PCE |
| Number Of Units In Package 1 | 1 |
| Package 1 Height | 3.50 in (8.89 cm) |
| Package 1 Width | 4.50 in (11.43 cm) |
| Package 1 Length | 5.50 in (13.97 cm) |
| Package 1 Weight | 2.93 lb(US) (1.33 kg) |

Contractual warranty

| | |
|-----------------|-----------|
| Warranty | 18 months |
|-----------------|-----------|

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)

Well-being performance



Pvc Free

Reach Regulation

[REACH Declaration](#)

Eu Rohs Directive

Not compliant

China Rohs Regulation


[China RoHS declaration](#)

Product out of China RoHS scope. Substance declaration for your information.

California Proposition 65

WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Wiring diagram

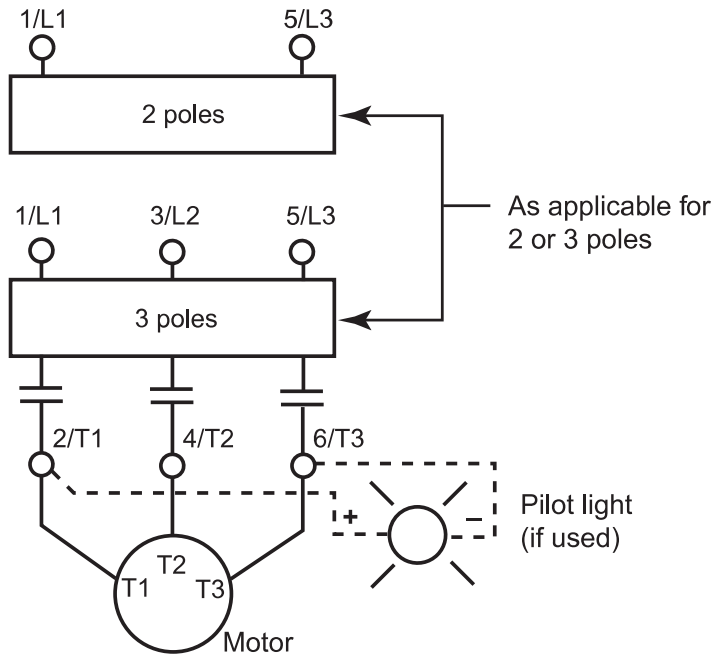

NOTE: The lamp is polarity sensitive in DC applications.