

# 8501KPR13P14V20

Plug in relay, Type KP, tubular, 1 HP at 277 VAC, 10A resistive at 120 VAC, 11 pin, 3PDT, 3 NO, 3 NC, 120 VAC coil

Product availability : Stock - Normally stocked in distribution facility



Price\* : 64.66 USD



## Main

|                              |                                     |
|------------------------------|-------------------------------------|
| Product range                | 8501K                               |
| Product type                 | Relay                               |
| Relay type                   | General purpose                     |
| Mounting type                | Socket                              |
| Contact composition          | 3PDT                                |
| [Uc] control circuit voltage | 120 V AC                            |
| Pilot light                  | Indicator light relay energised LED |
| Manual operator              | Without test button                 |

## Complementary

|                           |   |
|---------------------------|---|
| Horsepower rating         | 1 hp 277 V AC<br>0.33 hp 120 V AC   |
| Breaking capacity         | 3 A 120 V AC inductive control circuit UL 508<br>1.5 A 240 V AC inductive control circuit UL 508<br>10 A 277 V AC resistive control circuit UL 508<br>10 A 30 V DC resistive control circuit UL 508 |
| Maximum switching voltage | 300 V AC<br>30 V DC   |
| Contact material          | Silver alloy (AgNi)   |
| Operating time            | 20 ms - pick-up<br>20 ms - drop-out   |
| Shape of pins             | Tubular   |
| For use with              | 8501NR62<br>8501NR61  |

\* Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

## Environment

|   |   |
|---|---|
| Ambient temperature range - operational | -40...131 °F (-40...55 °C)                      |
| Product certifications                  | UL Listed<br>UL Recognized<br>CSA<br>RoHS<br>CE |
| Maximum Height                          | 2.66 in (67.56 mm)                              |
| Maximum Width                           | 1.4 in (35.56 mm)                               |
| Maximum Depth                           | 1.4 in (35.56 mm)                               |

## Ordering and shipping details

|                       |                       |
|-----------------------|-----------------------|
| Category              | 21141 - 8501 KP       |
| Discount Schedule     | CP2                   |
| GTIN                  | 00785901703884        |
| Nbr. of units in pkg. | 1                     |
| Package weight(Lbs)   | 0.22 lb(US) (0.10 kg) |
| Returnability         | Yes                   |
| Country of origin     | CN                    |

## Packing Units

|                  |                    |
|------------------|--------------------|
| Package 1 Height | 1.70 in (4.318 cm) |
| Package 1 width  | 1.70 in (4.318 cm) |
| Package 1 Length | 3.00 in (7.620 cm) |


## Offer Sustainability

|                            |   |
|----------------------------|---|
| Sustainable offer status   | Green Premium product   |
| REACH free of SVHC         | Yes   |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope)<br><a href="#">EU RoHS Declaration</a> |
| Toxic heavy metal free     | Yes   |
| Mercury free               | Yes   |
| RoHS exemption information | <a href="#">Yes</a>   |
| China RoHS Regulation      | <a href="#">China RoHS declaration</a>  |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>   |

---

Approximate Dimensions

---

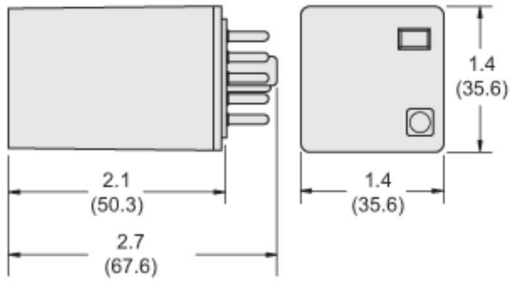


---

Connections and Wiring Diagrams

---

8501KPR13●●●



NEMA  
IEC