


Product availability : Non-Stock - Not normally stocked in distribution facility



Price* : 431.55 USD

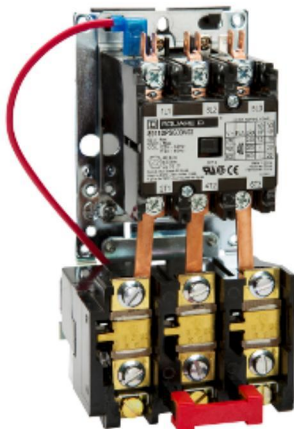

Main

Product	Definite Purpose Starter
Ampere Rating	40 A
Horsepower Rating	3 hp 115 V AC, 1 phase 10 hp 230 V AC, 3 phase 7.5 hp 230 V AC, 1 phase 20 hp 460 V AC, 3 phase 25 hp 575 V AC, 3 phase
Maximum Voltage Rating	600 V AC
Control Circuit Voltage	440 V AC 50 Hz 480 V AC 60 Hz
Phase	3 phase

Complementary

Enclosure Rating	Not rated (open device)
Locked Rotor Amperes	240 A 230 V AC 200 A 460 V AC 160 A 575 V AC
Number of Poles	3P
Range	DPS
Overload Type	Melting alloy
Number of Thermal Units	3

Ordering and shipping details

Category	21381 - 8911 DP
Discount Schedule	CP1
GTIN	00785901150879
Nbr. of units in pkg.	1
Package weight(Lbs)	2 lb(US) (0.91 kg)

* Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Oct 3, 2020

Returnability	No
Country of origin	CN

Offer Sustainability

REACH free of SVHC	Yes
EU RoHS Directive	Not compliant
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information.

Contractual warranty

Warranty	18 months
----------	-----------
