

# Product data sheet

Specifications



## passive connection sub-base ABE7 - 16 inputs or outputs - Led

ABE7H16C31

Product availability: Stock - Normally stocked in distribution facility

Price\*: 248.00 USD

### Main

Range Of Product	Modicon ABE7
Product Or Component Type	Passive discrete I/O sub-base
Sub-Base Type	Miniature sub-base
[Us] Rated Supply Voltage	19...30 V IEC 61131-2
Number Of Channels	16
Number Of Terminal Per Channel	3
Connections - Terminals	Screw type terminals, 1 x 0.09...1 x 1.5 mm <sup>2</sup> , 0.00...0.00 in <sup>2</sup> (0.09...1.5 mm <sup>2</sup> ) AWG 28...AWG 16) flexible with cable end Screw type terminals, 1 x 0.14...1 x 2.5 mm <sup>2</sup> , 0.00...0.00 in <sup>2</sup> (0.14...2.5 mm <sup>2</sup> ) AWG 26...AWG 12) solid Screw type terminals, 1 x 0.14...1 x 2.5 mm <sup>2</sup> , 0.00...0.00 in <sup>2</sup> (0.14...2.5 mm <sup>2</sup> ) AWG 26...AWG 14) flexible without cable end Screw type terminals, 2 x 0.09...2 x 0.75 mm <sup>2</sup> , 0.00...0.00 in <sup>2</sup> (0.09...0.75 mm <sup>2</sup> ) AWG 28...AWG 20) flexible with cable end Screw type terminals, 2 x 0.2...2 x 2.5 mm <sup>2</sup> , 0.00...0.00 in <sup>2</sup> (0.2...2.5 mm <sup>2</sup> ) AWG 24...AWG 14) solid

### Complementary

Supply Voltage Type	DC
Number Of Horizontal Rows	3
Status Led	1 LED per channel (Green) channel status 1 LED (Green) power ON
Polarity Distribution	0 V or 24 V
Short-Circuit Protection	2 A internal fuse, 5 x 20 mm, fast blow PLC end)
Fixing Mode	By clips 35 mm symmetrical DIN rail) By screws solid plate with fixing kit)
Maximum Supply Current	1.8 A
Current Per Channel	0.5 A
Maximum Current Per Output Common	1.8 A
Voltage Drop On Power Supply Fuse	0.3 V
[Ui] Rated Insulation Voltage	2000 V
Installation Category	II IEC 60664-1
Tightening Torque	5.31 lbf.in (0.6 N.m) flat Ø 3.5 mm
Net Weight	0.57 lb(US) (0.26 kg)

### Environment

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

<b>Product Certifications</b>	DNV UL GL CSA EAC
<b>Ip Degree Of Protection</b>	IP2X conforming to IEC 60529
<b>Resistance To Incandescent Wire</b>	1382 °F (750 °C) 30 s IEC 60695-2-11
<b>Shock Resistance</b>	15 gn 11 ms IEC 60068-2-27
<b>Vibration Resistance</b>	2 gn 10...150 Hz)IEC 60068-2-6
<b>Resistance To Electrostatic Discharge</b>	4 kV contact) level 3 IEC 61000-4-2 8 kV air) level 3 IEC 61000-4-2
<b>Resistance To Radiated Fields</b>	9.14 V/m (10 V/m) 26000000...1000000000 Hz)IEC 61000-4-3 level 3
<b>Resistance To Fast Transients</b>	2 kV level 3 IEC 61000-4-4
<b>Ambient Air Temperature For Operation</b>	23...140 °F (-5...60 °C) IEC 61131-2
<b>Ambient Air Temperature For Storage</b>	-40...176 °F (-40...80 °C) IEC 61131-2
<b>Pollution Degree</b>	2 IEC 60664-1

## Ordering and shipping details

<b>Category</b>	22375-INTERFACE MODULE(ABA,R,S)
<b>Discount Schedule</b>	CP2
<b>Gtin</b>	3389110251159
<b>Returnability</b>	No
<b>Country Of Origin</b>	LV

## Packing Units

<b>Unit Type Of Package 1</b>	PCE
<b>Number Of Units In Package 1</b>	1
<b>Package 1 Height</b>	2.76 in (7.000 cm)
<b>Package 1 Width</b>	3.23 in (8.200 cm)
<b>Package 1 Length</b>	5.35 in (13.600 cm)
<b>Package 1 Weight</b>	8.43 oz (239.000 g)
<b>Unit Type Of Package 2</b>	S03
<b>Number Of Units In Package 2</b>	32
<b>Package 2 Height</b>	11.81 in (30.000 cm)
<b>Package 2 Width</b>	11.81 in (30.000 cm)
<b>Package 2 Length</b>	15.75 in (40.000 cm)
<b>Package 2 Weight</b>	18.08 lb(US) (8.200 kg)

## Contractual warranty

<b>Warranty</b>	18 months
-----------------	-----------

## Sustainability

**Green Premium™ label** is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency RoHS/REACH

## Well-being performance

Mercury Free

Rohs Exemption Information Yes

## Certifications & Standards

Reach Regulation

[REACH Declaration](#)

Eu Rohs Directive

Pro-active compliance (Product out of EU RoHS legal scope)

China Rohs Regulation

[China RoHS declaration](#)

Environmental Disclosure

[Product Environmental Profile](#)

Weee

The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Circularity Profile


[End of Life Information](#)

California Proposition 65

WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

### Dimensions


---

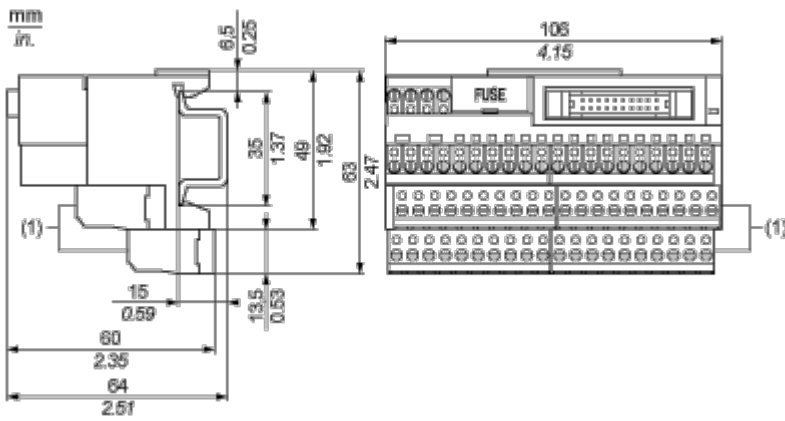

(1) ABE7BV10 / BV20


Mounting

---

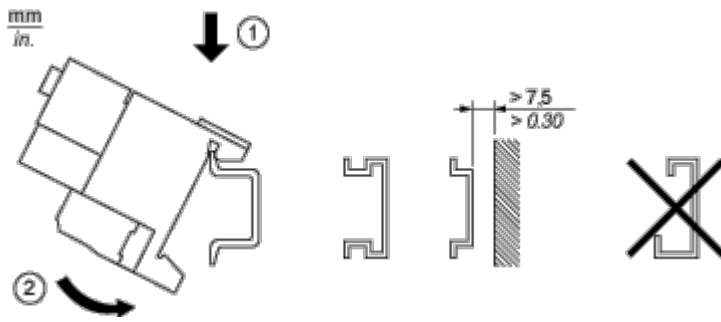


HE10 16 Channels

---

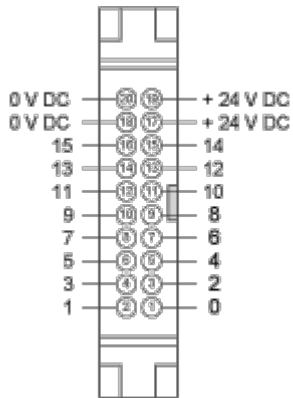


Wiring Diagram

---

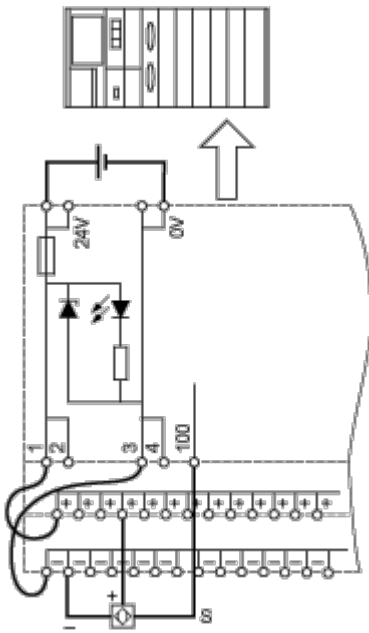

Curves for Determining Cable Type and Length According to the Current

16-channel Sub-base

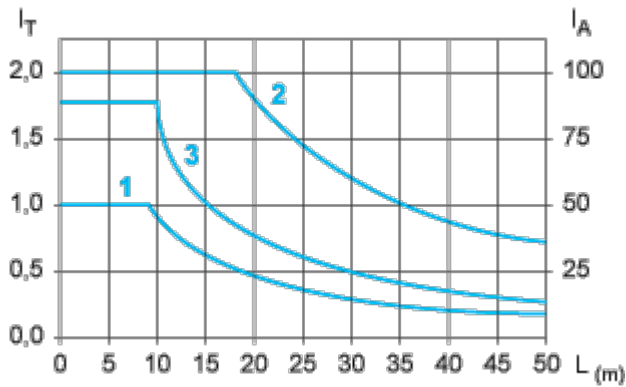

L Cable length

$I_T$  Total current per sub base (A)

$I_A$  Average current per channel (mA)

- (1) TSXCDP••2 and ABFH20H••0 cables with c.s.a.  $0.08 \text{ mm}^2$  (AWG 28).
- (2) TSXCDP••3 cables with c.s.a.  $0.34 \text{ mm}^2$  (AWG 22).
- (3) Cables with c.s.a.  $0.13 \text{ mm}^2$  (AWG 26).

The curves are given for a voltage drop of 1 V in the cable. For n volts tolerance, multiply the length determined from the graph by n.