

Product data sheet

Specifications



Harmony, Solid state relay, 45 A, DIN rail mount, random switching, input 4...32 V DC, output 48...600 V AC

SSD1A345BDRC3

Product availability: Stock - Normally stocked in distribution facility

Price*: 94.07 USD

Main

Range Of Product	Harmony Solid State Relays
Product Or Component Type	Solid state relay up to 50 A
Device Short Name	SSD1
Number Of Channels	1
Number Of Phases	1 phase
Product Configuration Type	Contact configuration with pluggable spring input
Mounting Support	35 mm symmetrical DIN rail conforming to IEC 60715
Rated Current	45 A
Output Switching Mode	Random voltage switching

Complementary

Operating Frequency	47...440 Hz
Rated Duty	Uninterrupted
Output Voltage	48...600 V AC
Control Circuit Voltage	4...32 V DC
Tightening Torque	2...2.2 N.m for load output 18...20 lb.in for load output
Connections - Terminals	Plug-in spring terminals, clamping connection capacity: 0.13...3.30 mm ² , AWG 26...AWG 12 for input Clamp terminal, clamping connection capacity: 10...26.67 mm ² , AWG 8...AWG 3 for output
Dielectric Strength	4 kV AC for input/output circuit 4 kV AC for input or output to case
Rated Impulse Withstand Voltage	6 kV for input/output circuit 6 kV for input or output to case
Insulation Resistance	1000 MOhm at 500 V DC
Local Signalling	for control voltage LED (green)
Pick-Up Voltage	4 V DC turn-on
Drop-Out Voltage	1 V DC turn-off
Input Current Range	10...15 mA
Solid State Switching Type	Random voltage switching
Load Current	0.1...45 A

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Transient Overvoltage	1200 V
Inrush Current	750 A at 60 Hz
Maximum Voltage Drop	<1.25 V on-state
Motor Controller Rating	0.75 kW/1 hp at 120 V AC 2.24 kW/3 hp at 240 V AC 3.73 kW/5 hp at 480 V AC
Electromagnetic Compatibility	Electrostatic discharge 6 kV criteria A contact discharge conforming to IEC 61000-4-2 Electrostatic discharge 8 kV criteria A air discharge conforming to IEC 61000-4-2 Conducted RF disturbances 10 V, 0.15...80 MHz criteria A level 3 conforming to IEC 61000-4-6 Electrical fast transient/burst immunity test 2 kV, 5/100 kHz criteria B output ports conforming to IEC 61000-4-4 Electrical fast transient/burst immunity test 1 kV, 5/100 kHz criteria B input ports conforming to IEC 61000-4-4 Radiated radio-frequency electromagnetic field immunity test 10 V/m, 80 MHz...1 GHz criteria A conforming to IEC 61000-4-3 Radiated radio-frequency electromagnetic field immunity test 3 V/m, 1.4...2 GHz criteria A conforming to IEC 61000-4-3 Radiated radio-frequency electromagnetic field immunity test 1 V/m, 2...2.7 GHz criteria A conforming to IEC 61000-4-3 Surge immunity test 1 kV criteria B output ports line to line conforming to IEC 61000-4-5 Surge immunity test 2 kV criteria B output ports line to earth conforming to IEC 61000-4-5 Radiated emission environment B for DC input supply conforming to IEC 60947-4-3 Conducted emission environment B for DC input supply conforming to IEC 60947-4-3 Immunity to microbreaks and voltage drops 30 %, 500 ms criteria A conforming to IEC 61000-4-11 Immunity to microbreaks and voltage drops 100 %, 20 ms criteria B conforming to IEC 61000-4-11
Device Form Designation	Form 5 semiconductor output DOL contactor
Maximum I²T For Fusing	2563 A ² .s for 10 ms 2343 A ² .s for 8.33 ms
Maximum Leakage Current	1 mA off-state
Dv/Dt	500 V/μs off-state at maximum rated voltage
Response Time	0.1 ms (turn-on) 0.5 cycle (turn-off)
Load Power Factor Range	0.5 with maximum load
Short Circuit Protection Coordination	Type 1 Type 2
Overvoltage Category	III
Width	1.77 in (45 mm)
Height	4.39 in (111.5 mm)
Depth	6.08 in (154.4 mm)
Net Weight	1.12 lb(US) (0.507 kg)
Device Presentation	Complete product

Environment

Flammability Rating	V-0 conforming to UL 94
Vibration Resistance	0.35 mm (f = 10...150 Hz) conforming to IEC 60068-2-6
Shock Resistance	50 gn for 11 ms (peak acceleration) , longitudinal position conforming to IEC 60068-2-27 30 gn for 11 ms (peak acceleration) , vertical position conforming to IEC 60068-2-27
Pollution Degree	2

Standards	IEC 61373: class B: category 1 IEC 60947-4-3 IEC 62314 IEC 60950-1 CSA C22.2 No 14-13 UL 508
Ip Degree Of Protection	IP20
Ambient Air Temperature For Operation	-40...176 °F (-40...80 °C)
Ambient Air Temperature For Storage	-40...212 °F (-40...100 °C)

Ordering and shipping details

Category	22375-INTERFACE MODULE(ABA,R,S)
Discount Schedule	CP2
Gtin	3606489808044
Returnability	Yes

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	1.97 in (5 cm)
Package 1 Width	4.72 in (12 cm)
Package 1 Length	5.71 in (14.5 cm)
Package 1 Weight	19.75 oz (560 g)
Unit Type Of Package 2	S02
Number Of Units In Package 2	10
Package 2 Height	5.91 in (15 cm)
Package 2 Width	11.81 in (30 cm)
Package 2 Length	15.75 in (40 cm)
Package 2 Weight	13.25 lb(US) (6.01 kg)

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)


[Guide to assess a product's sustainability >](#)



Transparency RoHS/REACH

Well-being performance

 Mercury Free

 RoHS Exemption Information Yes

Certifications & Standards

Reach Regulation [REACH Declaration](#)

Eu RoHS Directive Pro-active compliance (Product out of EU RoHS legal scope)

China RoHS Regulation [China RoHS declaration](#)

Environmental Disclosure [Product Environmental Profile](#)

Weee The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.



Circularity Profile [End of Life Information](#)

California Proposition 65 WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Dimensions

Dimensional Tolerances: ± 0.5 mm / 0.02 In.

mm
in.

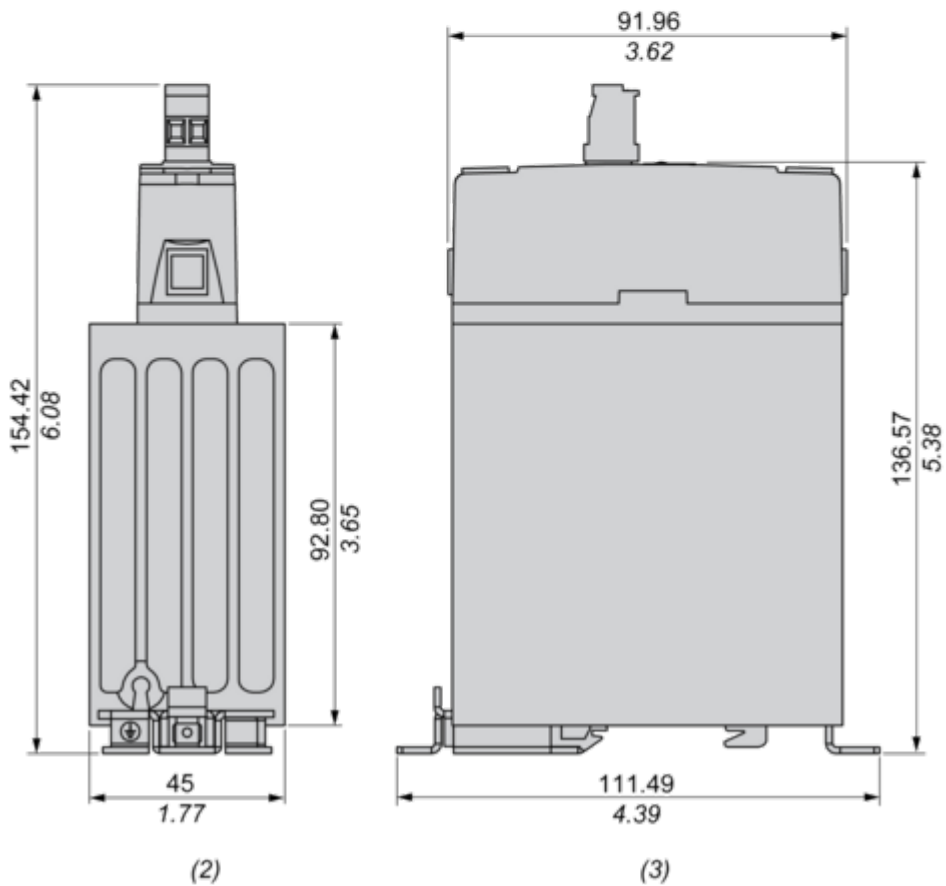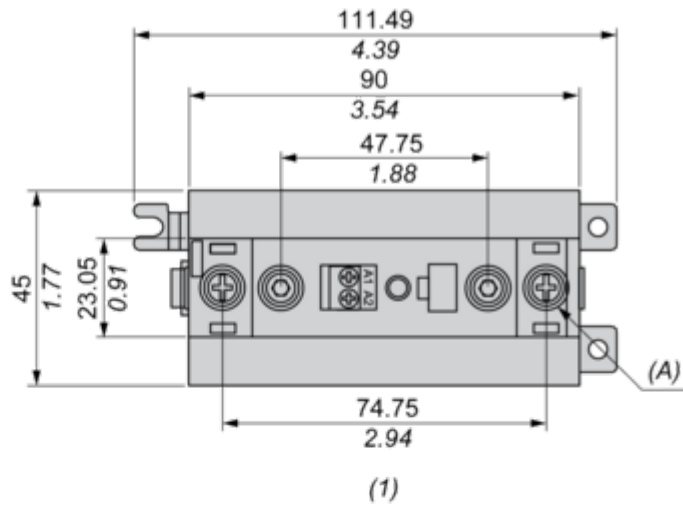

(1) Front view


(2) Top view

(3) Side view

(A) Screw 8-32 Stud (2 Places)

Performance Curves

Derating Curves

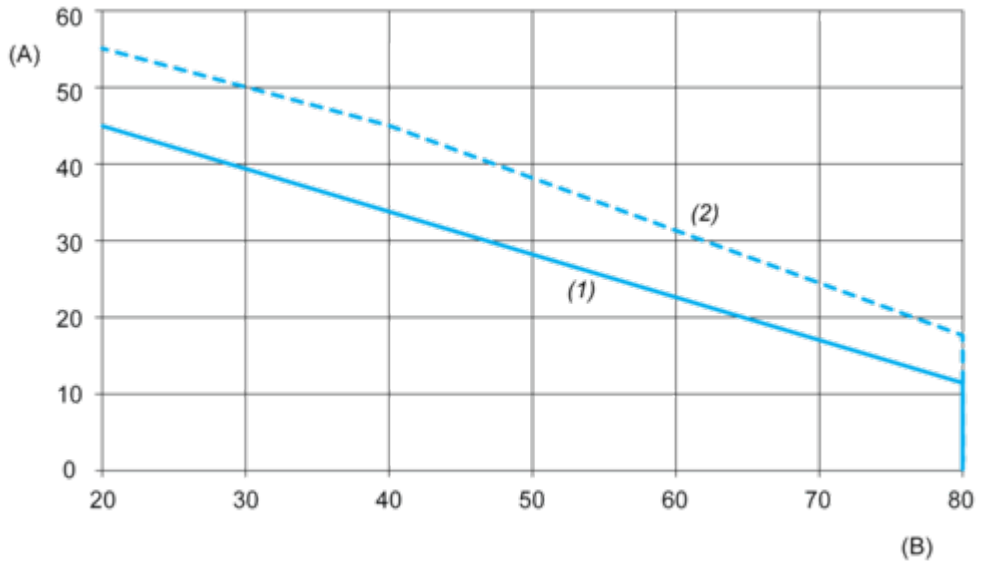

A : Load Current (Amperes)

B : Ambient Temperature (°C)

1 : Multiple units, no minimum spacing between components

2 : Installed single unit, distance to adjacent components more than 22.5 mm