

Product data sheet

Specifications



fan module - for TSXRKY racks - 200..240 V AC

TSXFANA5P

Product availability: Stock - Normally stocked in distribution facility

Main

Range Of Product	Modicon Premium Automation platform
Product Or Component Type	Fan module
Accessory / Separate Part Type	Fan kit
Accessory / Separate Part Designation	Fan kit

Complementary

Product Compatibility	TSXRKY racks
[Us] Rated Supply Voltage	200...240 V
Supply Circuit Type	AC
Net Weight	1.10 lb(US) (0.5 kg)

Ordering and shipping details

Category	22556-TSX MICRO, PL7 MICRO & ACCESS
Discount Schedule	PC14
Gtin	3389110734294
Returnability	No
Country Of Origin	FR

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	3.62 in (9.2 cm)
Package 1 Width	7.48 in (19.0 cm)
Package 1 Length	10.08 in (25.6 cm)
Package 1 Weight	26.00 oz (737.0 g)
Unit Type Of Package 2	S03
Number Of Units In Package 2	6
Package 2 Height	11.81 in (30.0 cm)
Package 2 Width	11.81 in (30.0 cm)
Package 2 Length	15.75 in (40.0 cm)
Package 2 Weight	10.40 lb(US) (4.716 kg)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Contractual warranty

Warranty

18 months

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)

Well-being performance



Mercury Free

Eu Rohs Directive

Not applicable, out of EU RoHS legal scope

China Rohs Regulation


[China RoHS declaration](#)

California Proposition 65

WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov


Ventilation Module

Dimensions

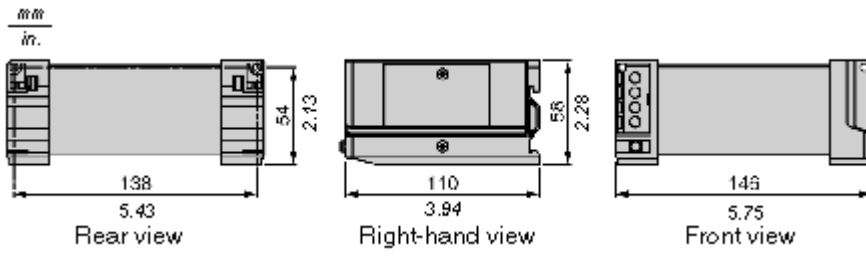

Wiring Diagrams


Connection of the Ventilation Module Power Supply

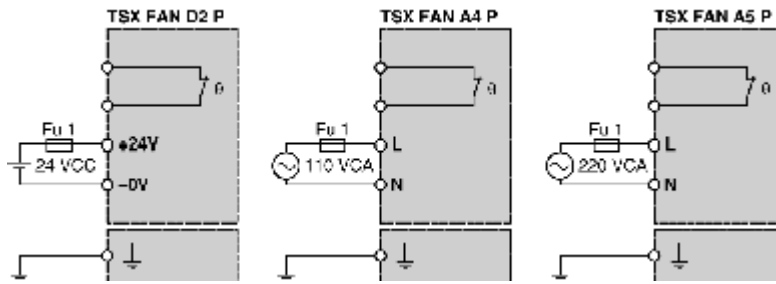


NOTE: When using several ventilation modules of the same type, use a common power supply for all the ventilation modules.

Connection of the Temperature Probe Power Supply

The Temperature probe may be supplied either by a direct current or alternating current and be connected to a LED indicator, a PLC input, etc. .

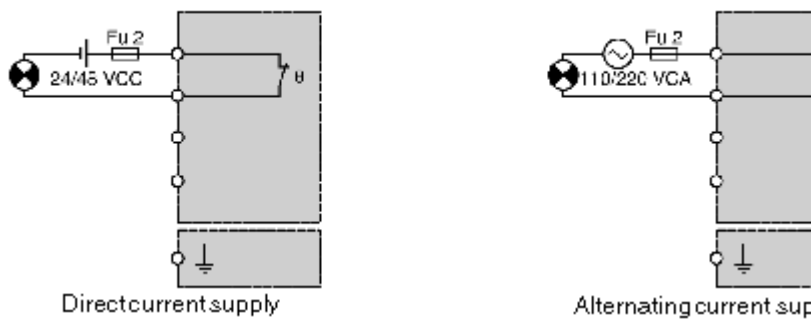

NOTE: When using several ventilation modules, the probe contacts shall be serialized.

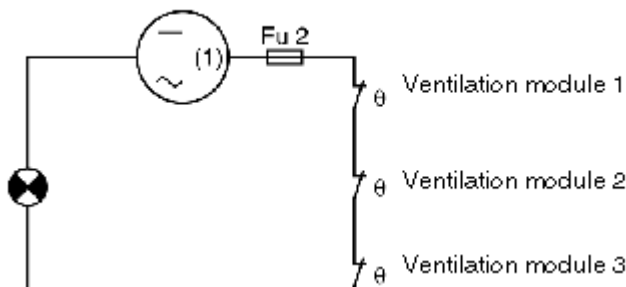

(1) 24/28 Vdc or 110/220 Vac