

# Product data sheet

Specifications



Die cast empty control station,  
Harmony XAP, XB2 SL, zinc alloy,  
grey, M20, undrilled,  
80x80x77mm, UL cULus

XAPD14

Product availability: Non-Stock - Not normally stocked in distribution facility

**Price\*: 136.00 USD**

## Main

Range of Product	Harmony XAP
Product or Component Type	Die-cast empty control station
Device short name	XAPD
Product destination	For Ø 22 mm control and signalling units
Product front plate size	80 x 80 mm
Usable depth	2.9 in (74.5 mm)
Number of cut-out	Without cut-out
Colour of base of enclosure	Grey RAL 7035)
Colour of cover	Grey RAL 7035)
Material	Die cast zinc
Sale per indivisible quantity	1
IP degree of protection	IP65 EN/IEC 60529 and EN/IEC 60947-5-1 IP66 EN/IEC 60529 and EN/IEC 60947-5-1 IP69 EN/IEC 60529 and EN/IEC 60947-5-1

## Complementary

Number of vertical rows	0
Number of horizontal rows	0
Control station type	Metal
Cable entry	2 x cable gland ISO
thread type	M20 x 1.5
CAD overall width	3.1 in (80 mm)
CAD overall height	3.1 in (80 mm)
CAD overall depth	3.03 in (77 mm)
Net Weight	1.334 lb(US) (0.605 kg)

## Environment

Protective treatment	TC
Ambient Air Temperature for Storage	-40...158 °F (-40...70 °C)
Ambient Air Temperature for Operation	-13...158 °F (-25...70 °C)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

<b>Electrical shock protection class</b>	Class I IEC 61140
<b>Degree of protection</b>	UL type 4 UL 50 E UL type 4X UL 50 E
<b>IK degree of protection</b>	IK07 IEC 62262
<b>Resistance to chemical agents</b>	Special treatment can be obtained on request
<b>Product Certifications</b>	UL cULus EAC

## Ordering and shipping details

<b>Category</b>	US10CS222475
<b>Discount Schedule</b>	0CS2
<b>GTIN</b>	3389118039797
<b>Returnability</b>	No
<b>Country of origin</b>	MA

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1
<b>Package 1 Height</b>	3.70 in (9.400 cm)
<b>Package 1 Width</b>	3.58 in (9.100 cm)
<b>Package 1 Length</b>	3.43 in (8.700 cm)
<b>Package 1 Weight</b>	27.866 oz (790.000 g)
<b>Unit Type of Package 2</b>	S02
<b>Number of Units in Package 2</b>	12
<b>Package 2 Height</b>	5.91 in (15.000 cm)
<b>Package 2 Width</b>	11.81 in (30.000 cm)
<b>Package 2 Length</b>	15.75 in (40.000 cm)
<b>Package 2 Weight</b>	20.900 lb(US) (9.480 kg)

## Sustainability

**Green Premium™ label** is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[How we assess product sustainability >](#)



Transparency RoHS/REACH

## Well-being performance

✓ Reach Free Of Svhc

✓ Toxic Heavy Metal Free

✓ Mercury Free

✓ Rohs Exemption Information [Yes](#)

## Certifications & Standards

**Reach Regulation**

[REACH Declaration](#)

**Eu Rohs Directive**

Pro-active compliance (Product out of EU RoHS legal scope)

[EU RoHS Declaration](#)

**China Rohs Regulation**

[China RoHS declaration](#)

**Environmental Disclosure**

[Product Environmental Profile](#)

**Circularity Profile**


No need of specific recycling operations

**California Proposition 65**

WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

Dimensions Drawings

Dimensions and Fixing

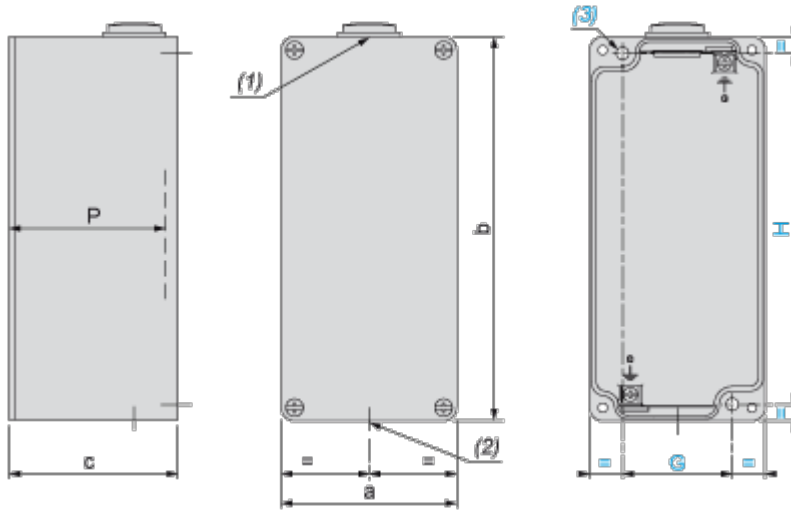

(1): 1 hole, with blanking plug (protrusion 6 mm/0.24 in.), for cable gland ISO M20 x 1.5

(2): 1 hole, without blanking plug, for cable gland ISO M20 x 1.5

(3): 2 x Ø 5.6 mm/0.22 in. holes, depth 19 mm/0.75 in.

P : Usable depth

a		b		c		G		H		P	
mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.
80	3.15	80	3.15	77	3.03	50	1.97	65	2.56	74.5	2.93

Image of product / Alternate images

Alternative

---





