

# Product data sheet

Specifications



## Editable voice alarms, Harmony XVS, black, mounting 96mm DIN rail, PNP, 12...24V DC

XVSV9BBP

**Product availability: Non-Stock - Not normally stocked in distribution facility**

**Price\*: 160.00 USD**

### Main

Range of Product	Harmony XVS
Product or Component Type	Editable electronic alarm
Beacon or indicator bank unit type	Sound unit
Device short name	XVSV

### Complementary

Color	Dark grey
Input type	Bit 6 channel input Binary 63 channel input
Assembly style	Ready assembled
Material	PC (polycarbonate): body PC (polycarbonate): back cover TPE (thermoplastic elastomer): front panel NBR (nitrile butadiene rubber)
marking	CE
Overvoltage category	Class II IEC 61140
Mounting Support	96 mm DIN rail
[Us] rated supply voltage	12...24 V DC
[Ue] rated operational voltage	10...30 V DC
[Ui] Rated Insulation Voltage	250 V
Inrush current	30 A
Associated fuse rating	1 A
[Uimp] rated impulse withstand voltage	2.5 kV IEC 60947-1
Power consumption in W	3.8 W
Current consumption	160 mA 24 V DC
clamping connection capacity	<= 1 x 1.5 mm <sup>2</sup>
Device Application	Printing Packaging Subway
Mounting diameter	4.1 in (105 mm)
Width	4.1 in (105 mm)
Height	4.1 in (105 mm)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Depth	2.0 in (50.1 mm)
Net Weight	0.591 lb(US) (0.268 kg)

## Environment

Discrete output type	PNP
Signalling type	Adjustable vocal sound
Standards	IEC 60947-5-1
Protective treatment	TC
Ambient Air Temperature for Storage	-4...140 °F (-20...60 °C)
Ambient Air Temperature for Operation	14...131 °F (-10...55 °C)
Pollution degree	2
Relative humidity	35...85 % without condensation
Vibration resistance	7 gn
IP degree of protection	Panel mounted IP65 IEC 60529 Wall mounted IP20
Noise level	0...97 dB stop or suppress)1 m

## Ordering and shipping details

Category	US100XV22617
Discount Schedule	00XV
GTIN	3606480623899
Returnability	No
Country of origin	ID

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	4.13 in (10.5 cm)
Package 1 Width	1.97 in (5 cm)
Package 1 Length	4.13 in (10.5 cm)
Package 1 Weight	9.5 oz (268 g)

## Sustainability

**Green Premium™ label** is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[How we assess product sustainability >](#)



Transparency

## Well-being performance

✓ Mercury Free

✓ Rohs Exemption Information [Yes](#)

**Reach Regulation** [REACH Declaration](#)

**Eu Rohs Directive** Pro-active compliance (Product out of EU RoHS legal scope)

**China Rohs Regulation** [China RoHS declaration](#)

**Environmental Disclosure** [Product Environmental Profile](#)

**Circularity Profile** [End of Life Information](#)


**California Proposition 65** WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

**Scip Number** Fe0ee3ab-dd49-4abe-bd8e-c49754e2c442

Dimensions Drawings

Dimensions

---

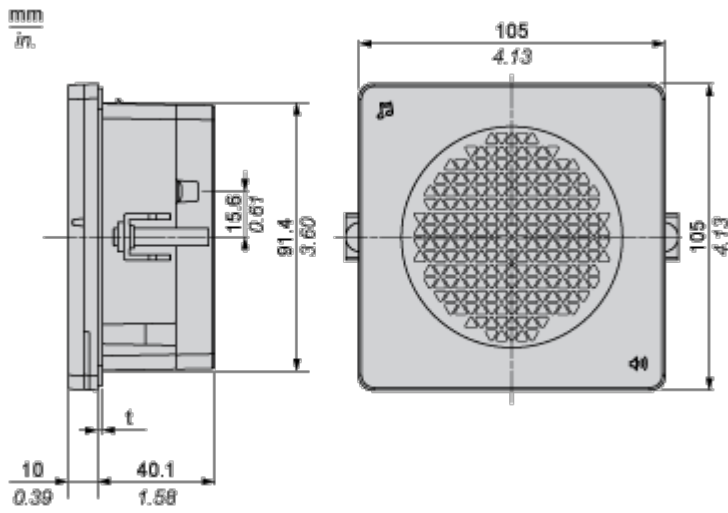


(t) : Waterproof rubber (1.6 mm / 0.06 in.)

Mounting and Clearance

Panel Cut Dimensions

---

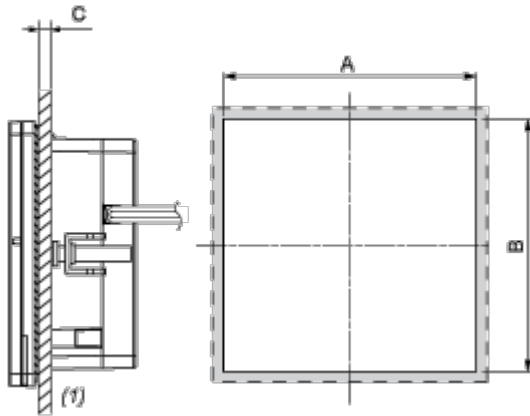


(1) Installation panel

A	B	C
92 +0.6/0 mm (3.62 +0.0236/0 in.)	92 +0.6/0 mm (3.62 +0.0236/0 in.)	1...4 mm (0.04...0.15 in.)

Wall Mount Dimensions


---

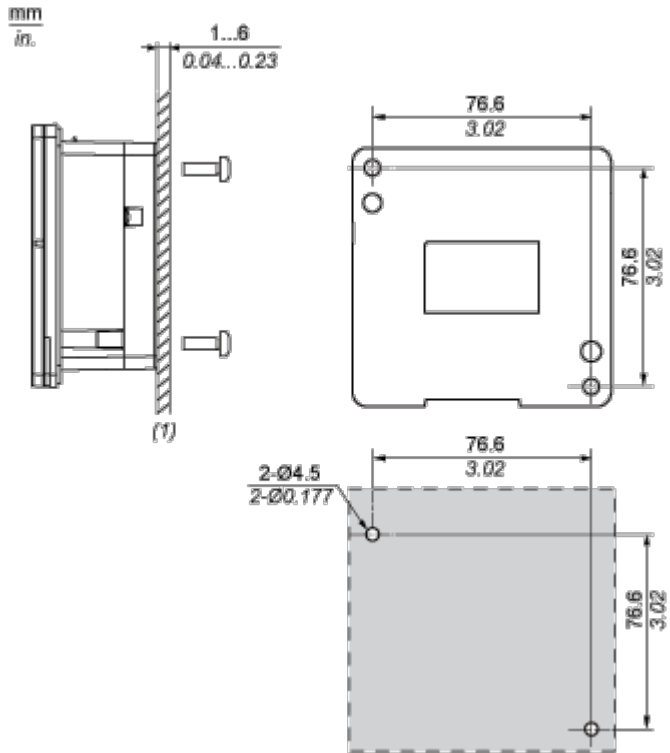

(1) Installation panel

Connections and Schema

Wiring Diagram

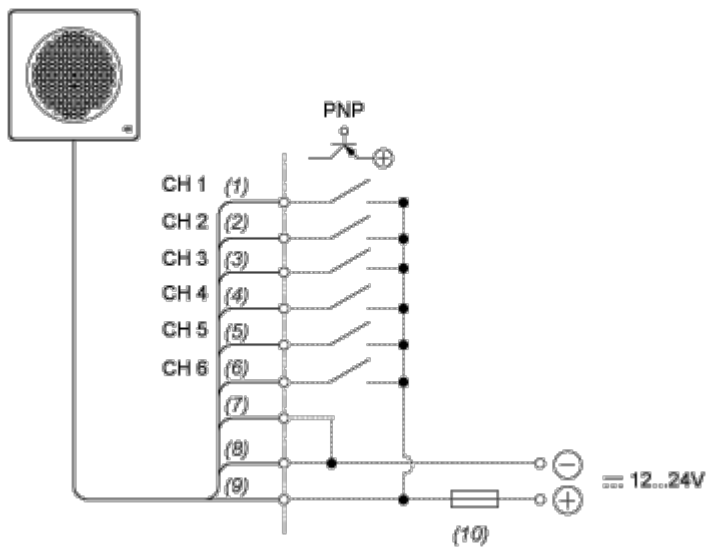


- (1) Green
- (2) Yellow
- (3) Brown
- (4) Blue
- (5) Purple
- (6) Gray
- (7) White
- (8) Black
- (9) Red
- (10) Fuse (Rated current:1 A)

Technical Illustration

Dimensions

---

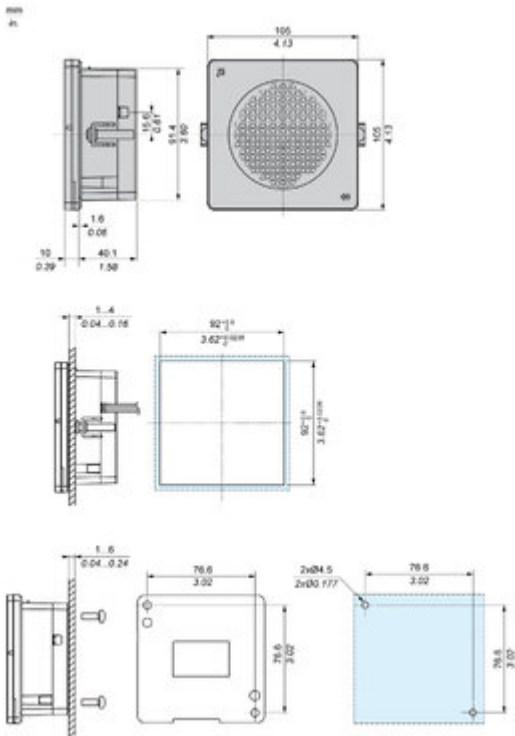



Technical Illustration

Wiring diagram

---

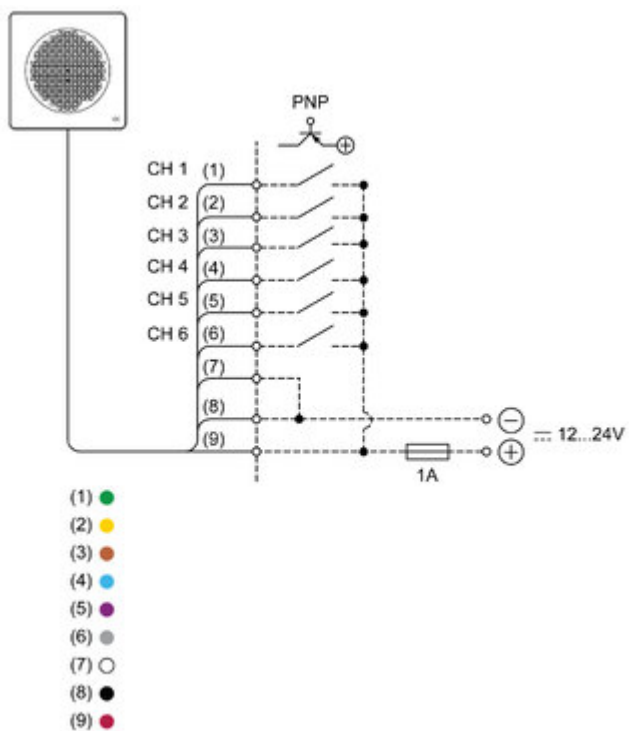


Image of product / Alternate images

Alternative

---





