


See V1K Installation Guide For Terminal Wire Size And Torque Information.

Note: Maintain Clearance of 3 Inches On All Sides To Other Equipment.



V1K Part Number	Max Voltage	Amps	Phase	Weight (LBS)
V1K80A03	600	80	3	62
V1K80A03EX	600	80	3	62

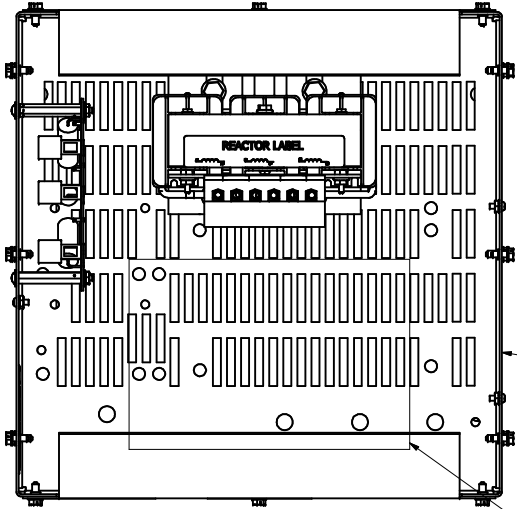




Suggested Customer Entry Side Of Enclosure.

(Customer Connections) Markings On Terminal Block For Reference Only.

Suggested Customer Entry Bottom Of Enclosure.

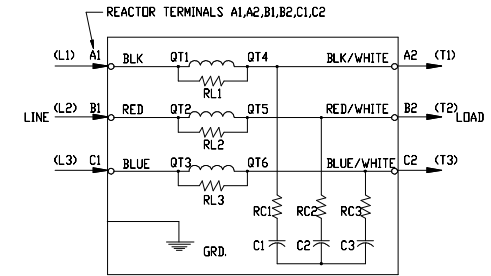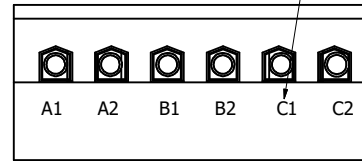

REACTOR AND BOARD ASSEMBLY CONNECTIONS

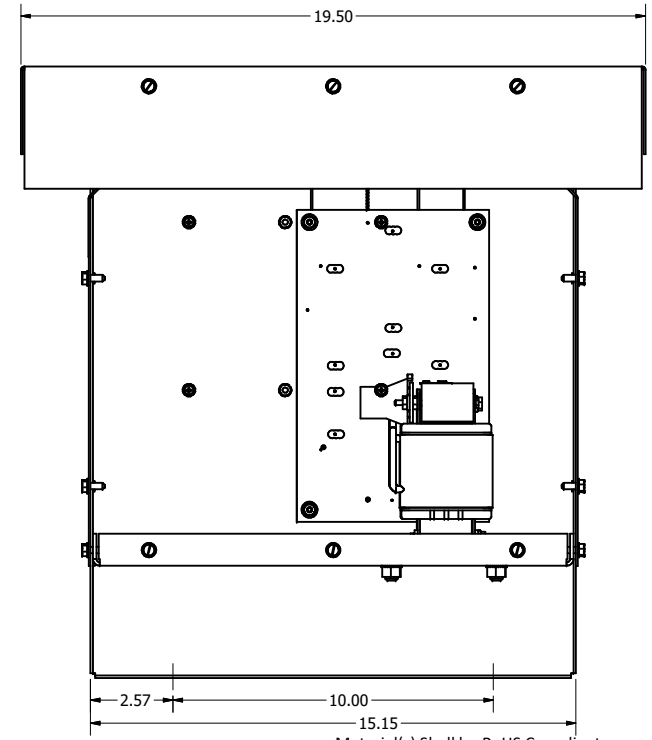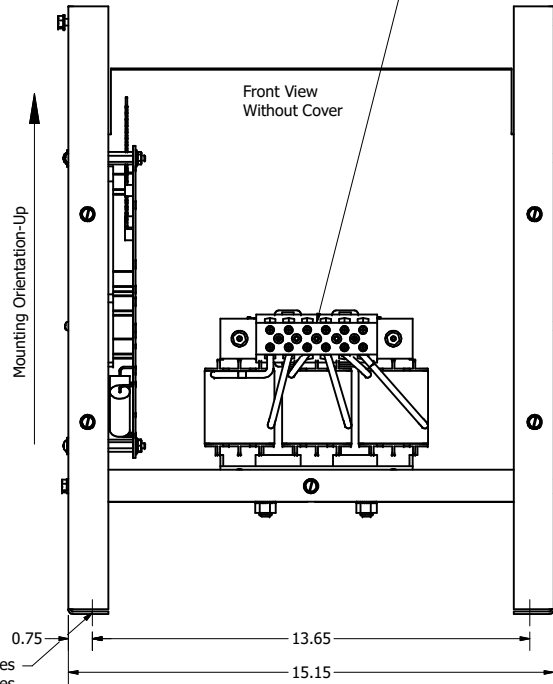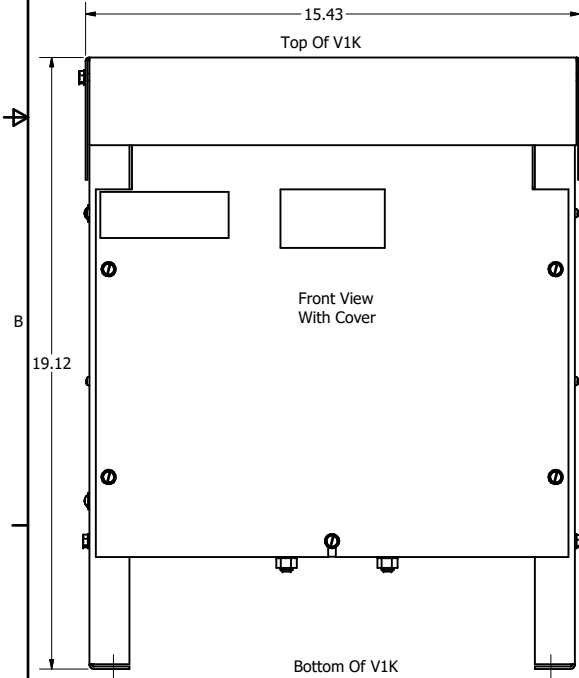

Material(s) Shall be RoHS Compliant

Customer Is Responsible For Installation to Meet All National And Local Electrical Codes.  
NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY WITH UL514B FOR TYPE 3R ENCLOSURES

TCI, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREJUDICE TO ANY PATENT RIGHTS OF TCI AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCI.

NO	REVISION	DATE	BY
C	4658 Rated To Max Voltage	03/04/19	JRN
B	4030, VIK DRAWING UPDATE	6/23/17	DSW
NO	REVISION	DATE	BY

TOLERANCES (EXCEPT AS NOTED)  
DECIMAL  
.XX ± .25  
.XXX ± .10  
FRACTIONAL  
± 1/16  
ANGULAR  
± 1°

**TCI** W132 N10611 Grant Drive  
Germantown, WI 53022

**V1K, TYPE 3R**  
**80 Amps**

DRN BY: DSW DATE: 4/26/17  
SCALE: TO FIT

104229DG  
SHT 1 OF 1