



Technology Solutions

TEK-SUB 4800C

Borehole Submersible Level Transmitter



LEVEL




Introduction

The Tek-Sub 4800C Borehole Submersible Level Transmitter is only 0.75" in diameter making it ideal for level monitoring in well and borehole applications. Constructed for years of trouble-free service, the Tek-Sub 4800C has welded stainless steel body and nose cap. Featured in Tek-Sub 4800C is a precision $\pm 0.25\%$ of full scale accuracy piezoelectric sensor. Tek-Sub 4800C comes with a choice of polyurethane or PTFE cable materials and is vented for barometric pressure compensation. The vent is covered with a maintenance-free filter, which prevents particulate or water droplets from entering the transmitter.


Measuring Principle

The Tek-Sub 4800C Borehole Submersible Level Transmitter consists of a sensor attached to a long cable, which is lowered to the bottom of the liquid container. The sensor operates by measuring the hydrostatic pressure of the liquid medium. Hydrostatic pressure (or head pressure) is the pressure exerted by the liquid in the vessel. The hydrostatic pressure measured by the sensor is determined by two parameters: the density and height of the liquid. With liquid density remaining constant, changes in hydrostatic pressure necessarily reflect a difference in liquid level.

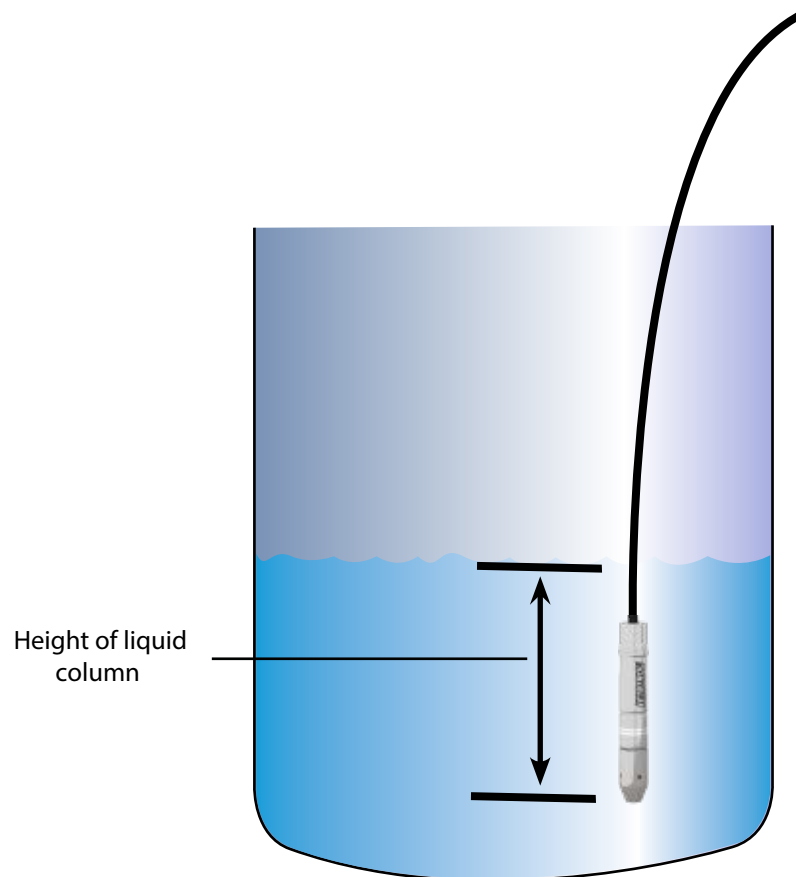

Operation

Typical Tek-Sub 4800C 19mm Borehole Submersible Level Transmitter application is shown in the following figure.

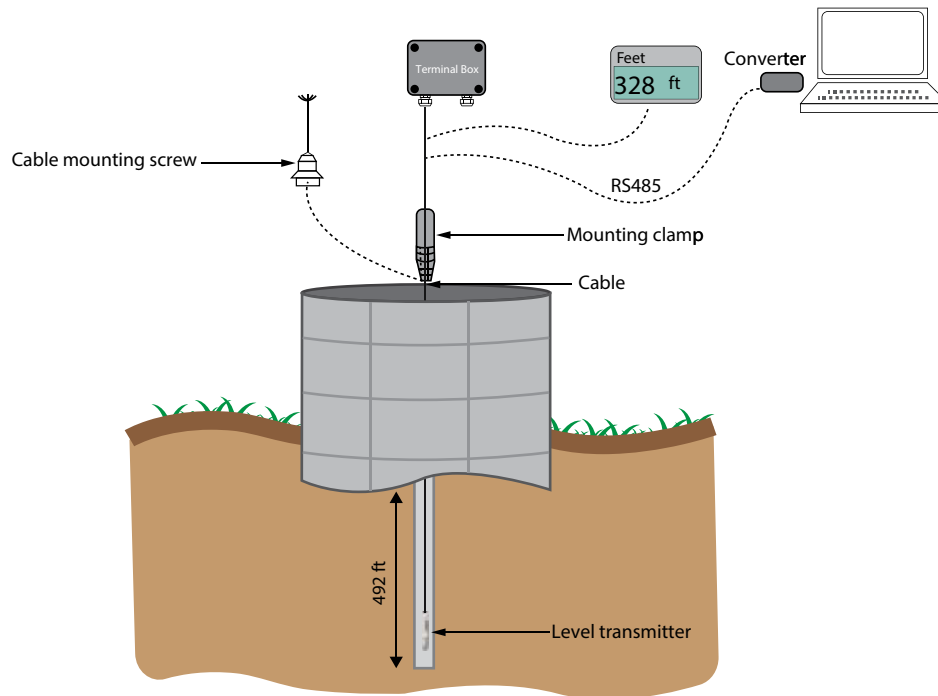

The pressure at the bottom of the tank or body of liquid is related to the height of the liquid. This pressure is called hydrostatic pressure or head pressure. Typical units for measurement of hydrostatic pressure are inches, feet, or meters of water column. In a water column, the hydrostatic pressure of 27.7" w.c. is approximately equivalent of 1 PSI at 100 °F. The volume of water or the shape of the tank does not affect the hydrostatic head pressure; it is the height of water that affects the pressure. Whether it is in a large water tank or a small bucket of water, the hydrostatic pressure of 27.7" w.c. is the same.

Modern PLC's and HMI's can calculate the liquid level of a tank by entering the geometry of the tank and the specific gravity of the liquid.


Features

- Rugged, compact design for bore holes
- Stainless steel diaphragm and housing for excellent environmental protection
- Factory calibrated, easy to install and use
- Temperature compensated
- Corrosion-proof and moisture protected sensor body
- Surge and lightning protection
- Long lasting service with virtually no maintenance
- Standard Output 4-20 mA, RS-485, 0.5-4.5 VDC
- Accuracy: $\pm 0.25\%$ FS

Applications

- Water level measurement in wells, borewells, ponds, reservoirs, weirs, and dams
- Ground water monitoring
- Drinking water systems
- Water diversion plants

Dimensional Drawing

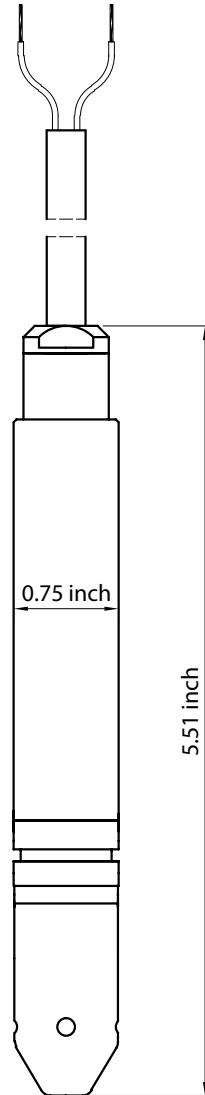

Accessories



Lighting Surge Protection box

Specifications

Pressure range	10 psig to 50 psig (7 mH ₂ O to 35 mH ₂ O), Optional ranges available
Pressure type	Gauge (Vented)
Over pressure	150% FS
Accuracy	0.25% FS
Temperature coefficient-zero	±0.75% FS (typ.), ±1.5% FS (max.) overcompensated temperature range
Temperature coefficient-span	±0.75% FS (typ.), ±1.5% FS (max.) overcompensated temperature range
Long term stability	±0.2% FS/year (typ.), ±0.3% FS/year (max.)
Output signal	4-20 mA, RS-485, 0.5-4.5 VDC
Power supply (Vs)	12 to 36 VDC
Load resistance (R _L)	For current output: $R_L < (V_s - 12) / 0.02A$
	For voltage output: $R_L > 10 \text{ k}\Omega$
Vibration	10g-force (20-2000 Hz)
Shock	100g-force (10 ms)
Cycles	10x10 ⁶ cycles
Insulation resistance	100 MΩ/50 VDC
Compensated temperature range	32 °F to 140 °F (0 °C to 60 °C)
Operating temperature range	32 °F to 160 °F (0 °C to 70 °C)
Storage temperature range	-40 °F to 257 °F (-40 °C to 125 °C)

Housing	304 SS
Cable	PTFE or Polyurethane
Diaphragm	316L SS
Seal ring	Viton
Oil filling	Silicone oil
Net weight	0.49 lb (225 g)


Installation

The Tek-Sub 4800C Borehole Submersible Level Transmitter is suitable for static, as well as flowing liquid level measurement applications. The transmitter is factory calibrated and ready for operation without adjustment.

- Ensure that the measuring liquid is compatible with the transmitter's construction material
- Insert the transmitter vertically down in the measurement pipeline
- Ensure that the transmitter is completely immersed in the liquid for maximum accuracy
- Avoid areas subject to electrical noise, excessive vibrations and radiant heat while mounting the transmitter


Static Fluid

Place the transmitter away from liquid resource to avoid effects of vibration and pressure influence.

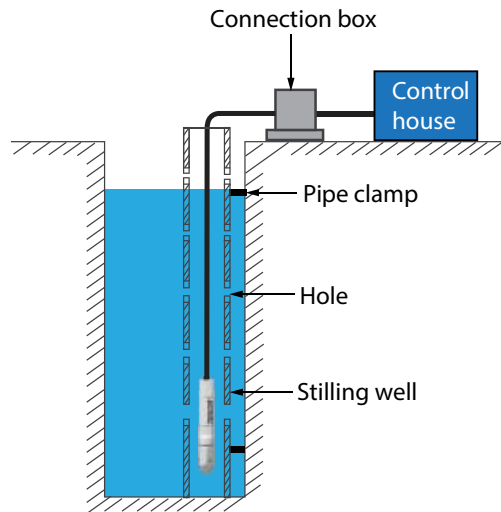

Flowing Fluid

A stilling well is recommended when there is a flowing fluid. A stilling well will dampen disruptions and provide a steady level for an accurate measurement.

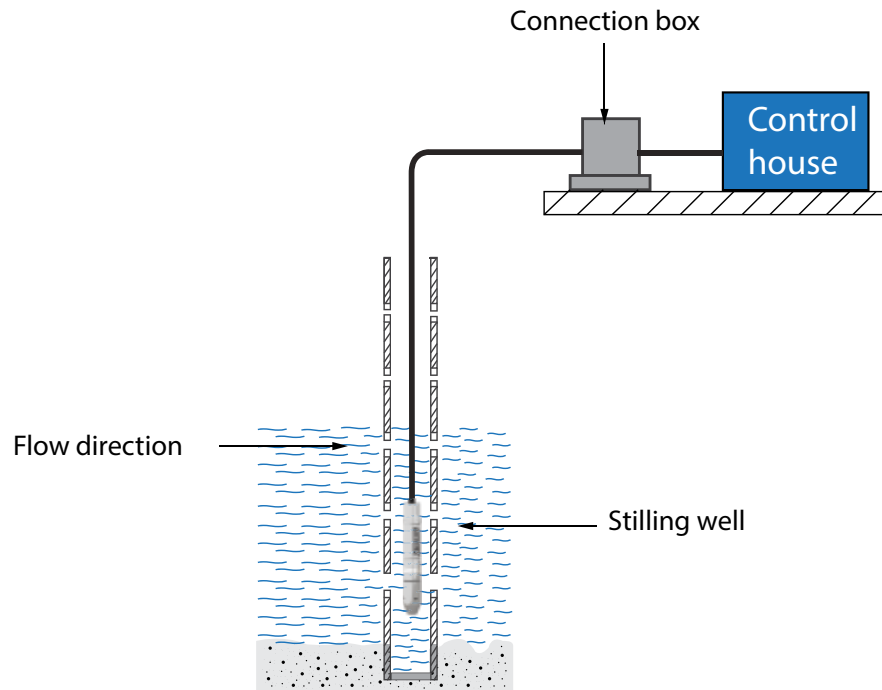

Model Chart

Example	Tek-Sub 4800C	10	42	25	P25	#	Tek-Sub 4800C-10-42-25-P25
Series	Tek-Sub 4800C						19 mm Borehole Submersible Level Transmitter
Range		10 15 25 50					10 psig (7 meters H ₂ O) 15 psig (10.5 meters H ₂ O) 25 psig (17.5 meters H ₂ O) 50 psig (35 meters H ₂ O)
Output			42 43 45 48 49				4-20mA 4-20mA, HART 0.5 - 4.5VDC Low-Voltage Modbus (5 VDC) Modbus RS-485
Accuracy				25			0.25% FS

Cable Length and Type					P25	75 Feet of Polyurethane Cable
					P34	100 Feet of Polyurethane Cable
					P50	150 Feet of Polyurethane Cable
					T25	70 Feet of PTFE Cable
					T34	100 Feet of PTFE Cable
					T50	150 Feet of PTFE Cable
Option					LP	Lighting Surge Protection box

Popular Models

Model Number	Description
4800C-10-42-25-P25	19mm Submersible Level Transmitter, Range 10 psig, 75 Feet Polyurethane Cable
4800C-15-42-25-P34	19mm Submersible Level Transmitter, Range 15 psig, 100 Feet Polyurethane Cable
4800C-25-42-25-P34	19mm Submersible Level Transmitter, Range 25 psig, 100 Feet Polyurethane Cable
4800C-50-42-25-P50	19mm Submersible Level Transmitter, Range 50 psig, 150 Feet Polyurethane Cable

Accessories

Model Number	Description
4800-LP	Lighting Surge Protection box
4800-HANGER	Submersible Cable Hanger

Cable Hanger



Customer Service & Support



TEK-TROL LLC reserves the right to change the designs and/or materials of its products without notice. The contents of this publication are the property of TEK-TROL LLC and cannot be reproduced by any other party without written permission. All rights reserved. Copyright © 2021 TEK-TROL LLC
TEK-TROL LLC
DOC # TEK/ITPS/CAT/220430/4800C/00.3



www.tek-trol.com

Tek-Trol LLC

796 Tek Drive Crystal Lake, IL 60014,
USA
Sales: +1 847-655-7428

Tek-Trol Solutions BV

Florijnstraat 18, 4879 AH Etten-Leur,
Netherlands
Sales: +31 76-2031908

Tek-Trol Middle East FZE

SAIF Zone, Y1-067, PO BOX No.
21125, Sharjah, UAE
Sales: +971-6526-8344

Support: +1 847-857-6076

Email: tektrol@tek-trol.com

www.tek-trol.com

Tek-Trol is a fully owned subsidiary of TEKMATON LLC. We offer our customers a comprehensive range of products and solutions for process, power and oil & gas industries. Tek-Trol provides process measurement and control products for Flow, Level, Temperature & Pressure measurement, Control valves & Analyzer systems. We are present in 15 locations globally and are known for our knowledge, innovative solutions, reliable products and global presence.