



Technology Solutions

TEK-LCD 7803A

NEMA 4X Pulse Input Rate/Totalizer Indicator



ACCESSORIES



Introduction


The Tek-LCD 7803A NEMA 4X Pulse Input Rate/Totalizer Indicator

The Tek-LCD 7803A is a plastic, field-mounted flow rate/totalizer that can display flow rate and total from a pulse output flowmeter. Its display has a five digit upper line for rate, a seven alpha-numeric character lower line for total, and comes standard with a backlight. The Tek-LCD 7803A is built in a NEMA 4X and IP65 rated plastic enclosure which can stand up to even the harshest environmental conditions. It can be powered from an included battery or a 24 VDC external power supply. Some features that really make the Tek-LCD 7803A stand out are its automatic unit conversions from flowmeter k-factor units, ability to log up to 1024 data points, and SafeTouch® through-window buttons. These buttons allow the Tek-LCD 7803A to be programmed and operated through the cover window, thus eliminating the need to remove the cover in dirty or wet environments.

Features

- Automatic Rate, Total, and Grand Total Unit Conversions
- On-Board Data Logging
- Modbus Communications RS-485 Option
- All Models Operate from -40 to 75°C (-40°F to 158°F)
- Two Isolated Open Collector Pulse Outputs, Up to 5 kHz
- Open Collector, NPN, PNP, TTL, Switch Contact, Sine Wave (Coil), Square Wave, Opto-Isolated Inputs
- Plastic NEMA 4X, IP65 Enclosure
- Isolated 4-20 mA Output for Rate, Total, or Grand Total
- Battery, DC, or Output Loop-Powered Models

Dimensional Drawings

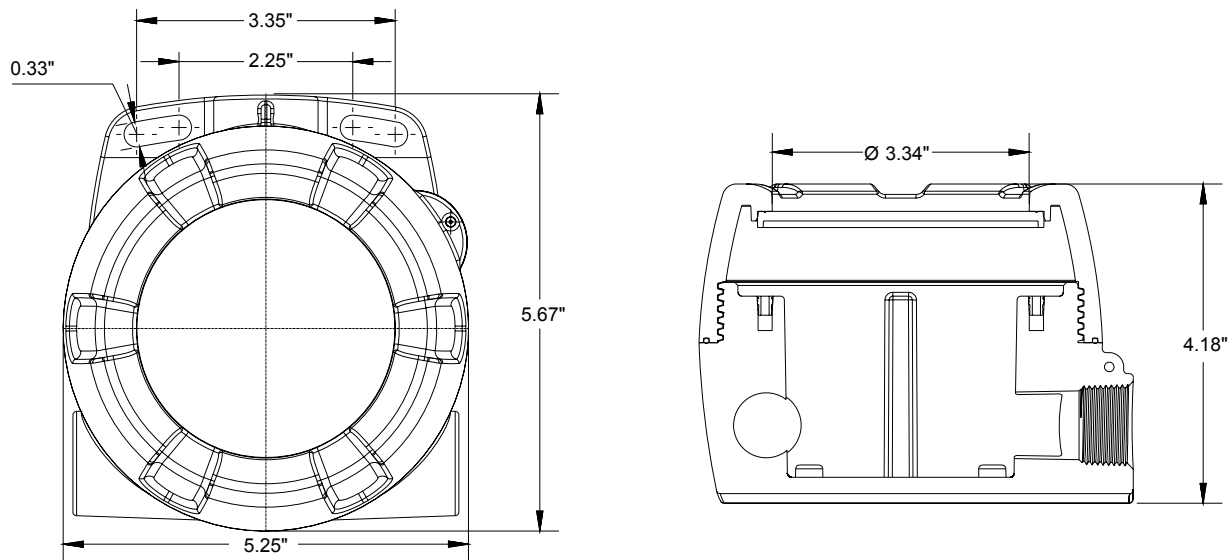

Specifications

General

Display	Top: Five digits (0 to 99,999), 0.7" (17.8 mm) high, 7-segment, automatic lead zero blanking. Bottom: Seven characters, 0.4" (10.2 mm) high, 14-segment automatic lead zero blanking. Symbols: Total, grand total, battery power/low battery, high & low alarm, password lock, and SafeTouch button sleep mode/disable.
Display Assignment	Top Display: Rate or total; Bottom Display: Combinations of rate, total, grand total, units, and custom tag.
Backlight	White LED, 10 sec auto-off when battery powered. Backlight deactivated below temperature $\approx -20^{\circ}\text{C}$
Display Update Rate	Ambient $> -20^{\circ}\text{C}$: 1 Update/Second. Ambient $< -20^{\circ}\text{C}$: 1 Update/10 Seconds. Note: Update is dependent on gate settings
Display Orientation	Display may be mounted at 90° increments up to 270° from default orientation
Over Range	Display flashes 99,999
Programming Method	Four SafeTouch through-window buttons when cover is installed. Four internal push buttons when cover is removed.
Recalibration	Calibrated at the factory to read frequency in Hz. No recalibration required
Max/Min Display	Max/Min readings reached by the process are stored until reset by the user or until power to the meter is cycled.
Alarm Indication	Flashing display plus HI/LO indicators for rate alarms, SET for total alarms.
Password Menu Options	Three programmable password selections can be used for the following: restrict modification of settings, prevent resetting the total or grand total without the password, or permanently lock out the ability to change or reset the grand total or any grand total related settings(making a non-resettable grand total).
Non-Volatile Memory	All programmed settings and total are stored in nonvolatile memory for a minimum of ten years if power is lost.
Power Options	9-30 VDC, 2.2 W max; 4-20 mA Output Powered, 30 VDC max; battery power; 9-30 VDC power with battery backup; 4-20 mA Output Powered with Battery Backup.
Battery	3.6 V Primary Lithium (Li-SOCl ₂), non-rechargeable Model PDABAT36C. Expected service life & recommended replacement interval is dependant on the operating conditions.
Isolation	All models: 500 V opto-isolated input-to-power/output with isolated input enabled. PD6730-APA: 500 V input/power-to-output PD6730-BMA: 500 V input/power-to-output PD6730-BTA: 500 V input-to-output. Note: Requires separate output supply
Data Logging	Up to 1024 records, recorded 4/day at specific times or at defined time intervals. Record contains date, time, rate, total, grand total, and log number.
Operating Temperature Range	-40 to 75°C (-40°F to 158°F)
Storage Temperature Range	-40 to 75°C (-40°F to 158°F)
Relative Humidity	0 to 90% non-condensing
Connections:	Screw terminals accept 12 to 22 AWG wire
Enclosure	NEMA 4X, IP65 plastic field enclosure. Color: grey. Material: Polycarbonate with UV Stabilizer. Three $\frac{3}{4}$ " NPT threaded conduit openings. Two $\frac{3}{4}$ " NPT plastic conduit plugs, with 1.29" wrenching flats and a screwdriver slot, are included.
Mounting	May be mounted directly to conduit. Two slotted flanges for wall mounting or NPS $1\frac{1}{2}$ " to $2\frac{1}{2}$ " or DN 0.13 to 0.21ft pipe mounting.
Overall Dimensions	5.67" x 5.25" x 4.18" (W x H x D) (144 mm x 133 mm x 106 mm)
Weight:	1.65 lbs (26.4 oz, 0.75 kg)
Warranty	3 years parts and labor

Input

Pulse Input:	Field selectable; Sourcing or sinking pulse or square wave 0-5 V, 0-12 V, or 0-24 V; TTL; NPN or PNP transistor; Open collector 100 kΩ pull-up to 3 V; Switch contact 100 kΩ pull-up to 3 V; PNP transistor 100 kΩ pull-down to ground (COM); Active input 100 kΩ to battery level, 10kΩ to power. Maximum Frequency: 64 kHz. Minimum Pulse Width: 5 μs. Thresholds selectable as normal or hi. <table border="1"> <thead> <tr> <th>Threshold Setting</th> <th>Low (V)</th> <th>High (V)</th> </tr> </thead> <tbody> <tr> <td>Normal</td> <td>1.2</td> <td>0.2</td> </tr> <tr> <td>Low</td> <td>2.0</td> <td>1.2</td> </tr> </tbody> </table>	Threshold Setting	Low (V)	High (V)	Normal	1.2	0.2	Low	2.0	1.2
Threshold Setting	Low (V)	High (V)								
Normal	1.2	0.2								
Low	2.0	1.2								
Opto-Isolated Input	Sourcing or sinking pulse or square wave 0-5 V, 0-12V, or 0-24 V; Logic High: 2-24 V, Logic Low: < 1 V.									
Maximum Frequency	20 kHz									
Minimum Pulse Width	20 μs									
Input Current	1 mA @ 5 V, 2.5 mA @ 12 V, 5 mA @ 24 V									
Low Voltage Mag Pickup Input	Sensitivity: 20 mVp-p to 24 Vp-p.									
Maximum Frequency	6 kHz									
Minimum Input Frequency	0.0001 Hz. Minimum frequency is dependent on high gate setting (rate display).									
Input Impedance	Pulse input: Greater than 75 kΩ @ 1 kHz									
Open collector/switch input	100 kΩ pull-up to 3 V.									
Input K-Factor Units	Gallons, liters, imperial gallons, cubic meters, barrels, bushels, cubic yards, cubic feet, cubic inches, liquid barrels, beer barrels, hectoliters, or custom.									
K-Factor	Field programmable K-Factor used to define custom input units. May be programmed from 0.000001 to 9,999,999 pulses/unit.									
Accuracy	±0.03% of calibrated span ±1 count									
Temperature Drift	Rate display is not affected by changes in temperature.									
Low-Flow Cutoff	0-99,999 (0 disables cutoff function)									
Decimal Point	Up to four decimal places or none: 4.4444, 33.333, 222.22, 1111.1, or 00000									
Calibration Range	Input 1 signal must be ≥: 1 Hz; input 2 signal may be set anywhere above input 1 setting. Minimum input span is 1 Hz. An Error message will appear if the input 1 and input 2 signals are too close together.									
Input Contact Debounce Filter	Programmable. Input signal frequency speed selections of Hi (no filter), Med (250 Hz max input, 31 ms pulse width), and Low. (100 Hz max input, 12 ms minimum pulse width).									
Time Base	Second, minute, hour, or day									
Gate	Low gate: 1-99 seconds; High gate: 2-9,999 seconds									

Popular Models

Model Number	Description
7803A-AP0	NEMA 4X Pulse Input Rate/Totalizer

Accessories

Model Number	Description
7800A-6846	Steel Pipe Mounting Kit
7800A-6846SS	Stainless Steel Pipe Mounting Kit
7800A-PLUG75P	¾" NPT Plastic Conduit Plug

Customer Service and Support



TEKMATION LLC reserves the right to change the designs and/or materials of its products without notice. The contents of this publication are the property of TEKMATON and cannot be reproduced by any other party without written permission. All rights reserved. Copyright © 2016 TEKMATON LLC
DOC #TEK/MR/1809/12/Tek-LCD/A
TEKMATION LLC



www.tek-trol.com

Tek-Trol is a fully owned subsidiary of TEKMATON LLC. We offer our customers a comprehensive range of products and solutions for process, power, and oil and gas industries. Tek-Trol provides process measurement and control products for Flow, Level, Temperature and Pressure Measurement, Control Valves and Analyzer systems. We are present in 15 locations globally and are known for our knowledge, innovative solutions, reliable products, and global presence.

Tek-Trol LLC

796 Tek Drive Crystal Lake, IL 60014 USA

Tel: +1 847 857 6076, +1 847 655 7428 Fax: +1 847 655 6147

Email: tektrol@tek-trol.com

www.tek-trol.com