


## Grounding Kit

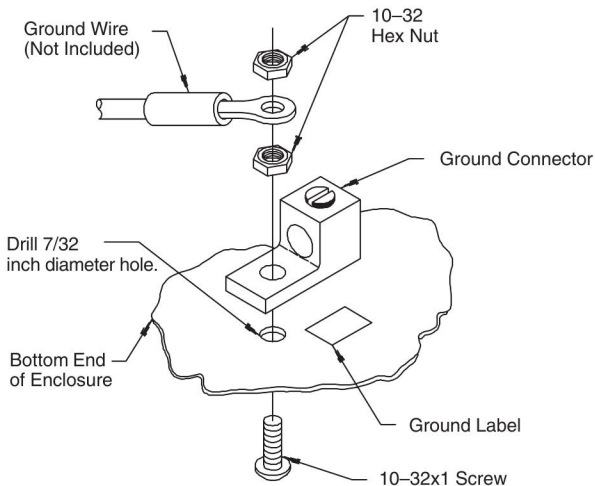

**NOTE:** Only use this ground kit where the use of this component is specified.

1. Drill 7/32 inch diameter hole in the bottom end of enclosure.
2. Remove paint where the ground connector will contact the enclosure to insure electrical continuity.
3. Install the ground connector and connect ground wire as shown.
4. Attach ground label adjacent to connector as shown.
5. If this enclosure has provisions for installing a panel, install the lockwasher included in the enclosure under one of the screws securing the panel. This will insure grounding between the panel and the enclosure.