

XGFEC540

Radio frequency identification XG, field expander conveying type, Sn 30...90 mm, 400 x 23 x 50 mm



Main

Range of product	Telemecanique Radio frequency identification XG
Accessory / separate part type	Field expander
Product specific application	Conveyor system
Product compatibility	XGCS4901201 + XGHB440245 XGCS4901201 + XGHB90E340 XGCS4901201 + XGHB520246 XGCS4901201 + XGHB320345 XGCS4901201 + XGHB320246
Accessory / separate part destination	Station with associated label
[Sn] nominal sensing distance	30...90 mm

Complementary

Accessory dimension	400 x 23 x 50 mm
---------------------	------------------

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	812 g
Package 1 Height	8.5 cm
Package 1 width	8.5 cm
Package 1 Length	54.5 cm
Unit Type of Package 2	S04
Number of Units in Package 2	12
Package 2 Weight	10.734 kg
Package 2 Height	30 cm
Package 2 width	40 cm
Package 2 Length	60 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information
California proposition 65	WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov


Contractual warranty

Warranty

18 months

Dimensions


Field Expanders

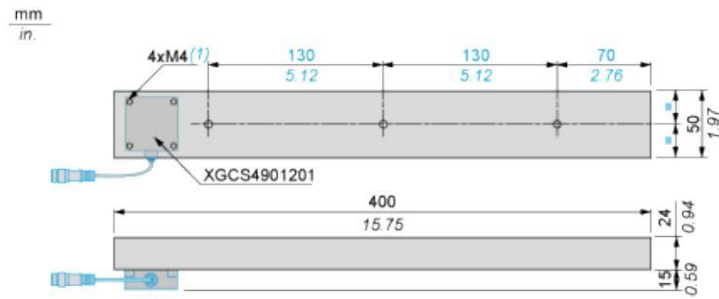

(1) 4 x M4 screws

Minimum Mounting Distances


Distance Between Field Expanders



Tag	e1	e2	e3
XGHB90E340 XGHB520246	195	285	195
XGHB320345	420	540	450

Minimum Mounting Distances in a Metal Structure



Distance Between Field Expanders



Field expanders	
e (mm)	h (mm)
15	30

Curves


Dialogue Zones for Field Expanders

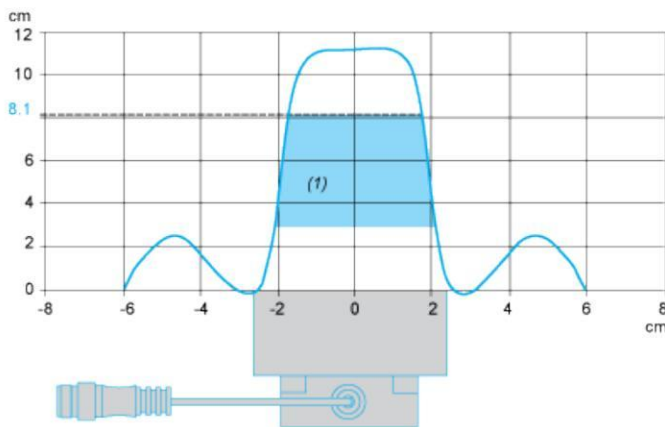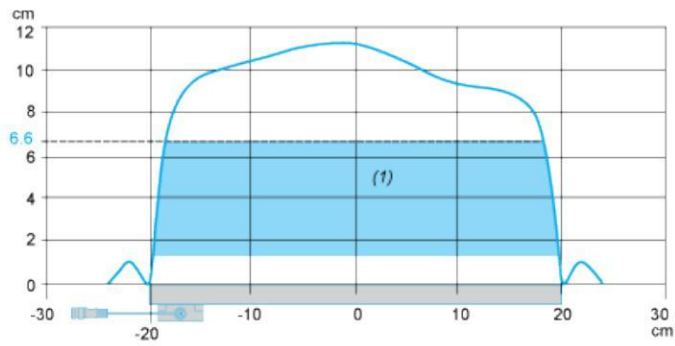


(1) Recommended working zone.

Curves

Dialogue Zones for Field Expanders

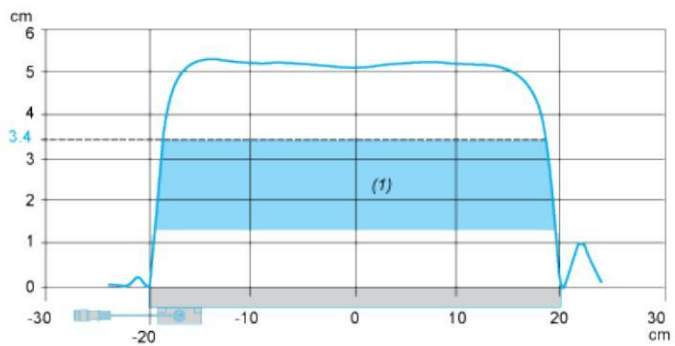

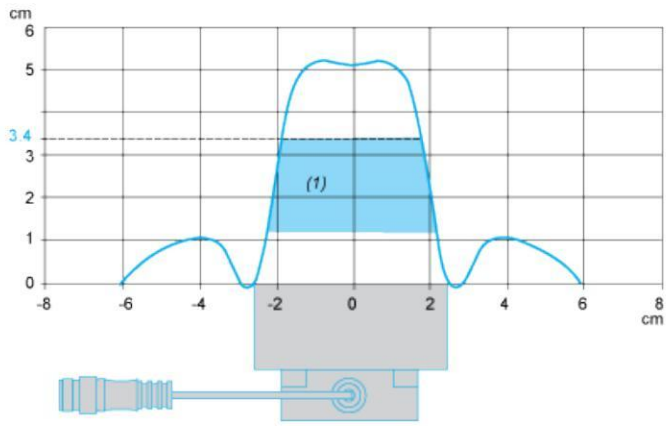

(1) Recommended working zone.