

## AC EDGE Rack Mount PDU Breaker 10A

### 3750-296

#### AC EDGE Breaker 10A 120V

#### Features

- Replacement Breaker for AC Edge 120 2N (single) - 10 Amp
- Airpax SnapPac 10A, for 1101-1188

#### Applications

- Power Distribution
- Industrial Automation
- Telecommunications Base Stations
- First Responder Sites
- Emergency Management Systems
- Load Expansion

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Maximum Continuous Operating Voltage (MCOV) L - N			140	Vdc
Current Rating			10	A

#### Mechanical Specifications

##### Size

Length	3.64 in	[92.46 mm]
Width	2.5 in	[63.5 mm]
Height	0.74 in	[18.8 mm]
Weight	1 lbs	[453.59 g]
Enclosure Material and Plating	Black Plastic	

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:  
[AC EDGE Rack Mount PDU Breaker 10A 3750-296](#)

## AC EDGE Rack Mount PDU Breaker 10A

**3750-296**

AC EDGE Breaker 10A 120V

---

Transtector Systems specializes in protection of highly sensitive, low voltage equipment through its patented, non-degrading silicon diode technology and custom filters. Our power quality expertise translates into a diverse product offering including AC, DC, and signal applications as well as integrated cabinets, power distribution panels and EMP hardened devices.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [AC EDGE Rack Mount PDU Breaker 10A 3750-296](#)

URL: <https://www.transtector.com/ac-edge-rack-mount-pdu-breaker-10a-3750-296-p.aspx>


The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Transtector reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Transtector does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Transtector does not assume any liability arising out of the use of any part or documentation.

AC EDGE Rack Mount PDU Breaker 10A


3750-296 CAD Drawing

REVISIONS		
REV.	DESCRIPTION	DATE
A	INITIAL RELEASE	1/17/19
		APPROVED DWR




3.64 [92.6]

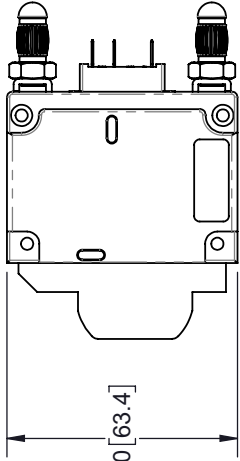


2.50 [63.4]



.74 [18.8]




UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [ ] ARE MILLIMETERS

TOLERANCES:  
 .X±.2 [5.08] FRACTIONS  
 XX±.01 [.25] ±.1/32  
 XXX±.005 [.13] ANGLES ±1°

ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.  
 THIRD-ANGLE PROJECTION



THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF TRANSTECTOR CORPORATION. ALL RIGHTS RESERVED.

SHEET 1 OF 1  
SCALE 1:2

**TRANSTECTOR**

10701 AIRPORT ROAD, HAYDEN, ID, 83835  
 PHONE: 1.208.635.6400 | 1.800.882.9110  
 FAX: 1.208.955.2041  
 www.transtector.com | e-mail: sales@transtector.com

SIZE CAGE DRAWN BY PART NUMBER  
 A 30992 HMB 3750-296

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.