

INTERSAFE DATA INTERFACE PORTS, TYPE 4/4X/12



INDUSTRY STANDARDS

Mild Steel Painted Ports

UL 508A Component Recognized; Type 4, 12; File No. E61997 cUL Component Recognized per CSA C22.2 No 94; Type 4, 12; File No. E61997

NEMA/EEMAC Type 4, 12 IEC 60529, IP66

Stainless Steel Ports

UL 508A Component Recognized; Type 4, 4X, 12; File No. E61997

cUL Component Recognized per CSA C22.2 No 94; Type 4, 4X, 12; File No. E61997

NEMA/EEMAC Type 4, 4X, 12 IEC 60529, IP66

Clear-Cover (polycarbonate) Ports

UL 508A Component Recognized; Type 4X, 12; File No. E61997

cUL Component Recognized per CSA C22.2 No 94; Type 4, 4X, 12; File No. E61997

IEC 60529, IP66

APPLICATION

INTERSAFE Data Interface Ports are mounted on an enclosure to allow programming access to devices inside without opening the enclosure door.

FEATURES

- Ready to use
- Frame and door assembly with aluminum back plate included with all models; 120 VAC receptacles and programming connectors are mounted to the plate in 40 standard configurations
- All standard configurations include a GFCI or standard duplex receptacle with a 5-A circuit breaker for added safety
- Door gasket (between the door and plate assemblies) and plate gasket (between the plate assembly and the enclosure) together provide a tight seal
- Template provided for accurate enclosure cutout dimensions
- Quarter-turn latch with screwdriver slot and padlock hasp on all steel and stainless steel door models for convenience and security
- Quarter-turn latch with screwdriver slot on polycarbonate models
- Disk drive enclosure provides access to one or two customersupplied disk drives without opening the cabinet
- Modifications and customization available to accommodate a wide variety of additional connectors

SPECIFICATIONS

- Door assembly and frame manufactured from 16 gauge steel or stainless steel
- Clear-cover models have a molded polycarbonate door
- · Steel and stainless steel doors are welded and ground
- Back plate is aluminum

FINISH

- RAL 9005 black fine-textured polyester powder coating—mild steel door assemblies
- · Brushed finish—stainless steel door assemblies
- · Brushed finish—aluminum back plates

MODIFICATION AND CUSTOMIZATION

Hoffman excels at modifying and customizing products to your specifications. Contact your local Hoffman sales office or distributor for complete information.



INTERSAFE DATA PORTS FOR CONTROLNET PROTOCOL






Left-hand image shows front view, GFCI Receptacle Models. Right-hand image shows Front front view, Duplex Receptacle Models. Rear view with and without terminal cover are below the table.

BULLETIN: A70E

| Catalog Number | Material | Configuration | Primary Connector/ Termination | Secondary Connector/ Termination | Supports Devices Sold by the Following Manufacturers |
|----------------|-----------------|---|---|----------------------------------|--|
| HOFOCN | Steel | - 120 VAC GFCI receptacle - Shielded RJ45 - 5-amp circuit breaker | - Shielded RJ45 - 10-ft. shielded cable with male RJ45 | _ | Allen-Bradley |
| HGF5CNSS | Stainless Steel | 120 VAC GFCI receptacleShielded RJ455-amp circuit breaker | - Shielded RJ45 - 10-ft. shielded cable with male RJ45 | - | Allen-Bradley |
| HGF5CNCC | Composite | - 120 VAC GFCI receptacle - Shielded RJ45 - 5-amp circuit breaker | - Shielded RJ45 - 10-ft. shielded cable with male RJ45 | - | Allen-Bradley |
| HDP5CN | Steel | 120 VAC duplex receptacle Shielded RJ45 5-amp circuit breaker | - Shielded RJ45 - 10-ft. shielded cable with male RJ45 | - | Allen-Bradley |
| HDP5CNSS | Stainless Steel | - 120 VAC duplex receptacle - Shielded RJ45 - 5-amp circuit breaker | - Shielded RJ45 - 10-ft. shielded cable with male RJ45 | - | Allen-Bradley |
| HDP5CNCC | Composite | 120 VAC duplex receptacleShielded RJ455-amp circuit breaker | - Shielded RJ45 - 10-ft. shielded cable with male RJ45 | - | Allen-Bradley |





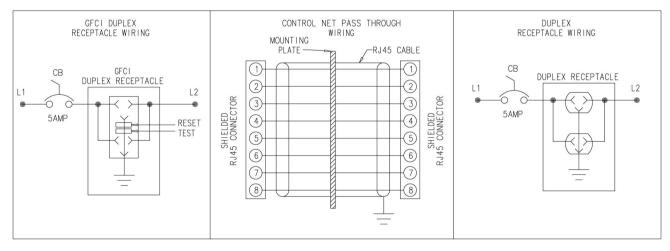

87929485



INTERSAFE DATA INTERFACE PORTS FOR DATA HIGHWAY PLUS PROTOCOL






Left-hand image shows front view, GFCI Receptacle Models. Right-hand image shows front view, Duplex Receptacle Models. Rear view with and without terminal cover are below the table.

BULLETIN: A70E

| Catalog Number | Material | Configuration | Primary Connector/ Termination | Secondary Connector/ Termination | Supports Devices Sold by the Following Manufacturers |
|----------------|-----------------|--|--------------------------------|----------------------------------|--|
| HGF58MDH | Steel | - 120 VAC GFCI receptacle - 8-pin mini DIN - DB9F - 5-amp circuit breaker | Female 8-pin mini DIN | DB9F terminal block | Allen-Bradley |
| HGF58MDHSS | Stainless Steel | - 120 VAC GFCI receptacle - 8-pin mini DIN - DB9F - 5-amp circuit breaker | Female 8-pin mini DIN | DB9F terminal block | Allen-Bradley |
| HGF58MDHCC | Composite | - 120 VAC GFCI receptacle - 8-pin mini DIN - DB9F - 5-amp circuit breaker | Female 8-pin mini DIN | DB9F terminal block | Allen-Bradley |
| HDP58MDH | Steel | - 120 VAC duplex receptacle - 8-pin mini DIN - DB9F - 5-amp circuit breaker | Female 8-pin mini DIN | DB9F terminal block | Allen-Bradley |
| HDP58MDHSS | Stainless Steel | - 120 VAC duplex receptacle - 8-pin mini DIN - DB9F - 5-amp circuit breaker | Female 8-pin mini DIN | DB9F terminal block | Allen-Bradley |
| HDP58MDHCC | Composite | - 120 VAC duplex receptacle - 8-pin mini DIN - DB9F - 5-amp circuit breaker | Female 8-pin mini DIN | DB9F terminal block | Allen-Bradley |





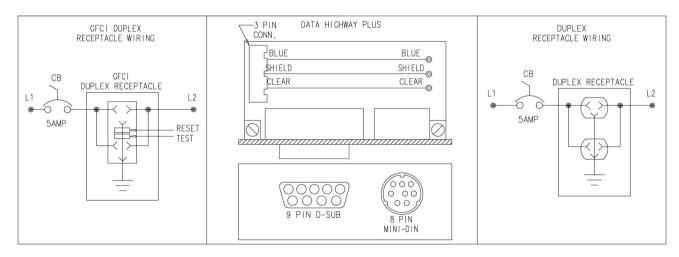

87929486

3 ACCESSORIES Spec-00131 W SUBJECT TO CHANGE WITHOUT NOTICE nVent.com/HOFFMAN





INTERSAFE DATA INTERFACE PORTS FOR DH+, MODBUS PLUS, ETHERNET PROTOCOL






Left-hand image shows front view, GFCI Receptacle Models. Right-hand image shows front view, Duplex Receptacle Models. Rear view with and without terminal cover are below the table.

BULLETIN: A70E

| Catalog Number | Material | Configuration | Primary Connector/ Termination | Secondary Connector/ Termination | Supports Devices Sold by the Following Manufacturers |
|----------------|-----------------|--|--------------------------------|---|--|
| HGF5ETHDH | Steel | - 120 VAC GFCI receptacle - RJ45 - DB9F - 5-amp circuit breaker | DB9F terminal block | - RJ45 - 10-ft. cable with male RJ45 | Allen-Bradley Group Schneider Computer peripherals |
| HGF5ETHDHSS | Stainless Steel | - 120 VAC GFCI receptacle - RJ45 - DB9F - 5-amp circuit breaker | DB9F terminal block | - RJ45 - 10-ft. cable with male RJ45 | Allen-Bradley Group Schneider Computer peripherals |
| HGF5ETHDHCC | Composite | - 120 VAC GFCI receptacle - RJ45 - DB9F - 5-amp circuit breaker | DB9F terminal block | - RJ45 - 10-ft. cable with male RJ45 | Allen-Bradley Group Schneider Computer peripherals |
| HDP5ETHDH | Steel | - 120 VAC duplex receptacle - RJ45 - DB9F - 5-amp circuit breaker | DB9F terminal block | - RJ45 - 10-ft. cable with male RJ45 | Allen-Bradley Group Schneider Computer peripherals |
| HDP5ETHDHSS | Stainless Steel | - 120 VAC duplex receptacle - RJ45 - DB9F - 5-amp circuit breaker | DB9F terminal block | - RJ45 - 10-ft. cable with male RJ45 | Allen-Bradley Group Schneider Computer peripherals |
| HDP5ETHDHCC | Composite | - 120 VAC duplex receptacle - RJ45 - DB9F - 5-amp circuit breaker | DB9F terminal block | - RJ45 - 10-ft. cable with male RJ45 | Allen-Bradley Group Schneider Computer peripherals |





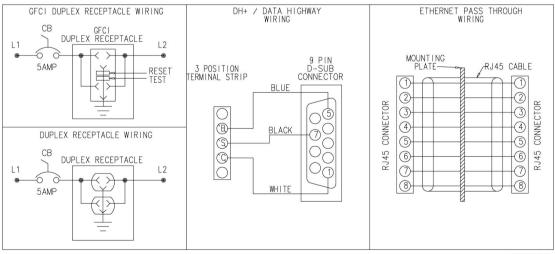

87929488



INTERSAFE DATA INTERFACE PORTS FOR ETHERNET PROTOCOL



Left-hand image shows front view, GFCI Receptacle Models. Right-hand image shows front view, Duplex Receptacle Models. Rear view with and without terminal cover are below the table.


BULLETIN: A70E

| Catalog Number | Material | Configuration | Primary Connector/ Termination | Secondary Connector/ Termination | Supports Devices Sold by the Following Manufacturers |
|----------------|-----------------|--|--------------------------------|----------------------------------|--|
| HGF5ETHETH | Steel | - 120 VAC GFCI receptacle - RJ45 - RJ45 - 5-amp circuit breaker | - RJ45 - 10-ft. cable | - RJ45 - 10-ft. cable | Computer peripherals |
| HGF5ETHETHSS | Stainless Steel | - 120 VAC GFCI receptacle - RJ45 - RJ45 - 5-amp circuit breaker | - RJ45 - 10-ft. cable | - RJ45 - 10-ft. cable | Computer peripherals |
| HGF5ETHETHCC | Composite | - 120 VAC GFCI receptacle - RJ45 - RJ45 - 5-amp circuit breaker | - RJ45 - 10-ft. cable | - RJ45 - 10-ft. cable | Computer peripherals |
| HDP5ETHETH | Steel | - 120 VAC duplex receptacle - RJ45 - RJ45 - 5-amp circuit breaker | - RJ45 - 10-ft. cable | - RJ45 - 10-ft. cable | Computer peripherals |
| HDP5ETHETHSS | Stainless Steel | - 120 VAC duplex receptacle - RJ45 - RJ45 - 5-amp circuit breaker | - RJ45 - 10-ft. cable | - RJ45 - 10-ft. cable | Computer peripherals |
| HDP5ETHETHCC | Composite | - 120 VAC duplex receptacle - RJ45 - RJ45 - 5-amp circuit breaker | - RJ45 - 10-ft. cable | - RJ45 - 10-ft. cable | Computer peripherals |





SUBJECT TO CHANGE WITHOUT NOTICE

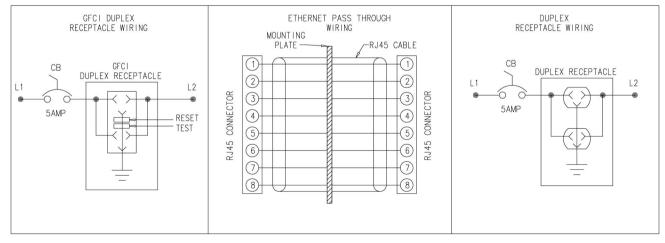

87929489



INTERSAFE DATA INTERFACE PORTS FOR ETHERNET/PROFINET PROTOCOL






Left-hand image shows front view, GFCI Receptacle Models. Right-hand image shows front view, Duplex Receptacle Models. Rear view with and without terminal cover are below the table.

BULLETIN: A70E

| Catalog Number HGF5ETH | Material Steel | Configuration - 120 VAC GFCI receptacle - RJ45 - 5-amp circuit breaker | Configuration - RJ45 - 10-ft. cable | Secondary Connector/ Termination | Supports Devices Sold by the Following Manufacturers Alten-Bradley GE Fanuc Groupe Schneider Siemens Computer peripherals |
|---------------------------|--------------------------|--|---|----------------------------------|---|
| HGF5ETHSS | Stainless Steel | - 120 VAC GFCI receptacle - RJ45 - 5-amp circuit breaker | - RJ45 - 10-ft. cable | | Allen-Bradley GE Fanuc Groupe Schneider Siemens Computer peripherals |
| HGF5ETHCC | Composite | - 120 VAC GFCI receptacle - R.145 - 5-amp circuit breaker | - RJ45 - 10-ft. cable | | Allen-Bradley GE Fanuc Groupe Schneider Siemens Computer peripherals |
| HDP5ETH | Steel | - 120 VAC duplex receptacle - R.145 - 5-amp circuit breaker | - RJ45 - 10-ft. cable | | Allen-Bradley GE Fanuc Groupe Schneider Siemens Computer peripherals |
| HDP5ETHSS | Stainless Steel | - 120 VAC duplex receptacle - R.145 - 5-amp circuit breaker | - RJ45 - 10-ft. cable | | Allen-Bradley GE Fanuc Groupe Schneider Siemens Computer peripherals |
| HDP5ETHCC | Composite | - 120 VAC duplex receptacle - RJ45 - 5-amp circuit breaker | - RJ45 - 10-ft. cable | | Allen-Bradley GE Fanuc Groupe Schneider Siemens Computer peripherals |





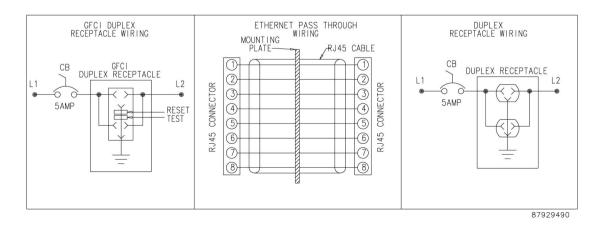

nVent.com/H0FFMAN PH 763.422.2211 Spec-00131 W ACCESSORIES 6





INTERSAFE DATA INTERFACE PORTS FOR PROFIBUS PROTOCOL






Left-hand image shows front view, GFCI Receptacle Models. Right-hand image shows front view, Duplex Receptacle Models. Rear view with and without terminal cover are below the table.


BULLETIN: A70E


| Catalog Number | Material | Configuration | Primary Connector/ Termination | Secondary Connector/ Termination | Supports Devices Sold by the Following Manufacturers |
|----------------|-----------------|--|--------------------------------|----------------------------------|---|
| HGF5PB | Steel | - 120 VAC GFCI receptacle - 9-pin Profibus - 5-amp circuit breaker | 9-pin Profibus terminal | | Allen-Bradley GE Fanuc Siemens |
| HGF5PBSS | Stainless Steel | - 120 VAC GFCI receptacle - 9-pin Profibus - 5-amp circuit breaker | 9-pin Profibus terminal | | Allen-Bradley GE Fanuc Siemens |
| HDP5PB | Steel | - 120 VAC duplex receptacle - 9-pin Profibus - 5-amp circuit breaker | 9-pin Profibus terminal | | Allen-Bradley GE Fanuc Siemens |
| HDP5PBCC | Composite | - 120 VAC duplex receptacle - 9-pin Profibus - 5-amp circuit breaker | 9-pin Profibus terminal | | Allen-Bradley GE Fanuc Siemens |











87929494

Spec-00131 W

SUBJECT TO CHANGE WITHOUT NOTICE

ACCESSORIES



INTERSAFE DATA INTERFACE PORTS FOR USB PROTOCOL, 10-FT. CABLE






Left-hand image shows front view, GFCI Receptacle Models. Right-hand image shows front view, Duplex Receptacle Models. Rear view with and without terminal cover are below the table.

BULLETIN: A70E

| Catalog Number HGF5USBUSB | Material Steel | Configuration - 120 VAC GFCI receptacle - USB Type A - USB Type A - 5-amp circuit breaker | Primary Connector/ Termination - USB Type Ab- 10-ft. cable with female USB Type B connector | Secondary Connector/ Termination - USB Type A - 10-ft. cable with female USB Type B connector | Supports Devices Sold by the Following Manufacturers Computer peripherals |
|------------------------------|-------------------|---|---|---|---|
| HGF5USBUSBSS | Stainless Steel | - 120 VAC GFCI receptacle - USB Type A - USB Type A - 5-amp circuit breaker | - USB Type A - 10-ft. cable with female USB Type B connector | - USB Type A - 10-ft. cable with female USB Type B connector | Computer peripherals |
| HGF5USBUSBCC | Composite | - 120 VAC GFCI receptacle - USB Type A - USB Type A - 5-amp circuit breaker | - USB Type A - 10-ft. cable with female USB Type B connector | - USB Type A - 10-ft. cable with female USB Type B connector | Computer peripherals |
| HDP5USBUSB | Steel | - 120 VAC duplex receptacle - USB Type A - USB Type A - 5-amp circuit breaker | - USB Type A - 10-ft. cable with female USB Type B connector | - USB Type A - 10-ft. cable with female USB Type B connector | Computer peripherals |
| HDP5USBUSBSS | Stainless Steel | - 120 VAC duplex receptacle - USB Type A - USB Type A - 5-amp circuit breaker | - USB Type A - 10-ft. cable with female USB Type B connector | - USB Type A - 10-ft. cable with female USB Type B connector | Computer peripherals |
| HDP5USBUSBCC | Composite | - 120 VAC duplex receptacle - USB Type A - USB Type A - 5-amp circuit breaker | - USB Type A - 10-ft. cable with female USB Type B connector | - USB Type A - 10-ft. cable with female USB Type B connector | Computer peripherals |





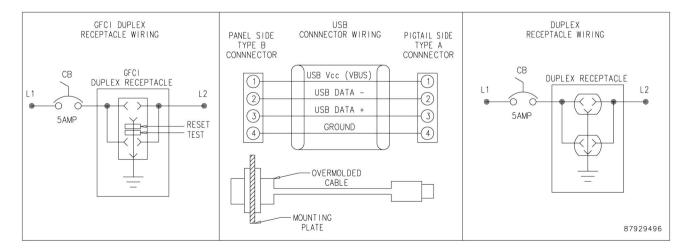




INTERSAFE TYPE 4/4X/12 DATA INTERFACE PORT DISK DRIVE ENCLOSURE



This enclosure, available in both steel and stainless steel, allows access to one or two customer-supplied disk drives from outside the cabinet, allowing computer system use and updates without opening the cabinet.

BULLETIN: A70E

| Catalog Number | Configuration | Description |
|----------------|---------------|--|
| HCP514B | CP2/514b | Steel 2 gang dual CD/DVD drive cover |
| HCP514BSS | CP2/514b | Stainless steel 2 gang dual CD/DVD drive cover |



CUTOUT (NOT TO SCALE)


TO ORDER A MODIFIED CONFIGURATION FOR **INTERSAFE TYPE 4/4X/12 DATA INTERFACE PORTS**



- Choose the required connectors to a maximum of 8 plate sectors (refer to Plate Sector Diagram)
- Order connectors using the code in the Connector ID column of
- the INTERSAFE Connectors table
 Hoffman will determine the layout of the connectors. If a specific layout is required, contact your local Hoffman Sales Office for a quotation.
- 5-amp circuit breakers will be provided with 120VAC receptacles unless otherwise specified
- To order, contact your local Hoffman sales representative

Configuration Example Plate Sectors, 8 Maximum

| Customer Requires | Code | Sectors Used |
|---|------|--------------|
| (1) 6-pin mini DIN (female) | MD6 | 1 |
| (1) RJ45 connector (female) | R45 | 1 |
| (1) GFCI duplex receptacle with 3-amp circuit breaker | GF3 | 5 |



87790670



INTERSAFE CONNECTOR 8M



| Connector Description | Connector Termination | Plate Sectors Used | |
|-----------------------|-----------------------|--------------------|--|
| 8-pin mini DIN | Terminal Block | 2 | |

Left-hand image shows front view. Right-hand image shows rear view.

INTERSAFE CONNECTOR 9FG





| Connector Description | Connector Termination | Plate Sectors Used |
|---|---|-----------------------|
| GE Fanuc Genius 9-pin female with bracket | 10 ft. cable to male 9-pin D-Sub with bracket | 1 |

Left-hand image shows front view. Right-hand image shows rear view.

INTERSAFE CONNECTOR 9FT





| Connector Description | Connector Termination | Plate Sectors Used |
|-----------------------|-----------------------|--------------------|
| D-Sub 9-pin female | 9-pin terminal | 2 |

Left-hand image shows front view. Right-hand image shows rear view.

INTERSAFE CONNECTOR 9M





| Connector Description | Connector Termination | Plate Sectors Used |
|-----------------------------|-----------------------------------|--------------------|
| D-Sub 9-pin male with cable | 10 ft cable to female 9-pin D-Sub | 1 |

Left-hand image shows front view. Right-hand image shows rear view.

INTERSAFE CONNECTOR 9MT





| Connector Description | Connector Termination | Plate Sectors Used |
|-----------------------|-----------------------|--------------------|
| D-Sub 9-pin male | 9-pin terminal | 1 |







| Connector Description | Connector Termination | Plate Sectors Used |
|-----------------------|-----------------------------------|--------------------|
| D-Sub 15-pin female | 10 ft. cable to male 15-pin D-Sub | 1 |

Left-hand image shows front view. Right-hand image shows rear view.

INTERSAFE CONNECTOR 15FT





| Connector Description | Connector Termination | Plate Sectors Used |
|--|-----------------------|--------------------|
| D-Sub 15-pin female with 15-pin terminal | 15-pin terminal | 1 |

Left-hand image shows front view. Right-hand image shows rear view.

INTERSAFE CONNECTOR 15H





| Connector Description | Connector Termination | Plate Sectors Used |
|--|--|-----------------------|
| D-Sub 15-pin high density female (Monitor) | 10 ft cable to male 15-pin high-density D-Sub | 1 |

Left-hand image shows front view. Right-hand image shows rear view.

INTERSAFE CONNECTOR 15M





| Connector Description | Connector Termination | Plate Sectors Used |
|-----------------------|-------------------------------------|--------------------|
| D-Sub 15-pin male | 10-ft. cable to female 15-pin D-Sub | 1 |

Left-hand image shows front view. Right-hand image shows rear view.

INTERSAFE CONNECTOR 25F





| Connector Description | Connector Termination | Plate Sectors Use |
|--------------------------------|-----------------------------------|-------------------|
| D-Sub 25-pin female with cable | 10 ft. cable to male 25-pin D-Sub | 1 |

Left-hand image shows front view. Right-hand image shows rear view.

INTERSAFE CONNECTOR 25FT





| Connector Description | Connector Termination | Plate Sectors Used |
|--|-----------------------|--------------------|
| D-Sub 25-pin female with 25-pin terminal | 25-pin terminal | 2 |

Left-hand image shows front view. Right-hand image shows rear view.

11 ACCESSORIES Spec-00131 W SUBJECT TO CHANGE WITHOUT NOTICE nVent.com/H0FFMAN



INTERSAFE CONNECTOR 25M






| Connector Description | Connector Termination | Plate Sectors Used |
|------------------------------|-------------------------------------|--------------------|
| D-Sub 25-pin male with cable | 10-ft. cable to female 25-pin D-Sub | 1 |

Left-hand image shows front view. Right-hand image shows rear view.

INTERSAFE CONNECTOR 25MT





| Connector Description | Connector Termination | Plate Sectors Used | |
|-----------------------|-----------------------|--------------------|--|
| D-Sub 25-pin male | 25-pin terminal | 2 | |

Left-hand image shows front view. Right-hand image shows rear view.

INTERSAFE CONNECTOR BNC





| Connector Description | Connector Termination | Plate Sectors Used |
|-----------------------|---|--------------------|
| BNC | BNC female receptacle with 10-ft. cable to male BNC | 1 |

Left-hand image shows front view. Right-hand image shows rear view.

INTERSAFE CONNECTOR CN





| Connector Description | Connector Termination | Plate Sectors Used |
|--|--------------------------------------|--------------------|
| ControlNet shielded R J45 female connector | 10-ft, shielded cable with male RJ45 | 2 |

Left-hand image shows front view. Right-hand image shows rear view.

INTERSAFE CONNECTOR DH







| Connector Description | Connector Termination | Plate Sectors Used | |
|------------------------|-----------------------|--------------------|--|
| Data Highway Plus DB9F | Terminal block | 2 | |



INTERSAFE CONNECTOR DNM



| Connector Description | Connector Termination | Plate Sectors Used | |
|-----------------------|-----------------------|--------------------|--|
| DeviceNet Mini | Terminal block | 2 | |

Left-hand image shows front view. Right-hand image shows rear view.

INTERSAFE CONNECTOR DNP





| Connector Description | Connector Termination |
|-----------------------|-----------------------|
| DeviceNet Phoenix | Terminal block |

Left-hand image shows front view. Right-hand image shows rear view.

INTERSAFE CONNECTOR DPO







| Connector Description | Connector Termination | Plate Sectors Used |
|---|-----------------------|--------------------|
| Duplex receptacle with no circuit breaker | Terminal block | 4 |

Left-hand image shows front view. Right-hand image shows rear view.

INTERSAFE CONNECTOR DP3

ACCESSORIES



| Connector Description | Connector Termination | Plate Sectors Used |
|--|-----------------------|--------------------|
| Dunley recentacle with 3-amn circuit breaker | Terminal block | 5 |

Left-hand image shows front view. Right-hand image shows rear view.

SUBJECT TO CHANGE WITHOUT NOTICE

nVent.com/HOFFMAN

Spec-00131 W



INTERSAFE CONNECTOR DP5



Connector Description Connector Termination Plate Sectors Used Duplex receptacle with 5-amp circuit breaker Terminal block 5

Left-hand image shows front view. Right-hand image shows rear view.

INTERSAFE CONNECTOR ETH





| Connector Description | Connector Termination | Plate Sectors Used |
|-----------------------|-----------------------------|--------------------|
| RJ45 female connector | 10-ft. cable with male RJ45 | 1 |

Left-hand image shows front view. Right-hand image shows rear view.

INTERSAFE CONNECTOR GEG





| Connector Description | Connector Termination | Plate Sectors Used |
|-----------------------|-----------------------|--------------------|
| DB9 GE Genius | 10-ft. cable | 1 |

Left-hand image shows front view. Right-hand image shows rear view.

INTERSAFE CONNECTOR GFO





| Connector Description | Connector Termination |
|-----------------------|-----------------------|
| GFCI receptacle | Terminal block |
| | |





INTERSAFE CONNECTOR GF3



Connector Description Connector Termination Plate Sectors Used GFCI receptacle with 3-amp circuit breaker Terminal block 5


Left-hand image shows front view. Right-hand image shows rear view.

INTERSAFE CONNECTOR GF5









RSPLY



INTERSAFE CONNECTOR MCL





| Connector Description | Connector Termination | Plate Sectors Used |
|-----------------------|-----------------------|--------------------|
| Micrologix | 10-ft. cable | 1 |

Left-hand image shows front view. Right-hand image shows rear view.

INTERSAFE CONNECTOR MD6





| Connector Description | Connector Termination |
|-------------------------|---|
| 6-pin mini DIN (female) | 10-ft. cable with female 6-pin mini DIN |

Left-hand image shows front view. Right-hand image shows rear view.

INTERSAFE CONNECTOR MD8





| Connector Description | Connector Termination | Plate Sectors Used |
|-------------------------|---------------------------------------|--------------------|
| 8-pin mini DIN (female) | 10-ft. cable with male 8-pin mini DIN | 1 |

Left-hand image shows front view. Right-hand image shows rear view.

INTERSAFE CONNECTOR PB





| Connector Description | Connector Termination | Plate Sectors Used | |
|-----------------------|-----------------------|--------------------|--|
| ProfiBus 9-pin | Terminal | 2 | |



INTERSAFE CONNECTOR R11



| Connector Description | Connector Termination | Plate Sectors Used |
|--|-----------------------------|--------------------|
| R I11 female connector with male R I12 | 10-ft cable with male R I12 | 1 |

Left-hand image shows front view. Right-hand image shows rear view.

INTERSAFE CONNECTOR RJS





| Connector Description | Connector Termination | Plate Sectors Used |
|--------------------------------|--------------------------------------|--------------------|
| RJ45 shielded female connector | 10-ft. shielded cable with male RJ45 | 2 |

Left-hand image shows front view. Right-hand image shows rear view.

INTERSAFE CONNECTOR SNP





| Connector Description | Connector Termination | Plate Sectors Used |
|-----------------------|-----------------------------------|--------------------|
| DB15F GESNP | DB15 male GESNP with 10-ft. cable | 1 |

Left-hand image shows front view. Right-hand image shows rear view.

INTERSAFE CONNECTOR SPO



ACCESSORIES



| Connector Description | Connector Termination | Plate Sectors Used |
|---|------------------------------------|--------------------|
| Single receptacle with no circuit breaker | Terminal block with terminal cover | 2 |

Left-hand image shows front view. Right-hand image shows rear view.

SUBJECT TO CHANGE WITHOUT NOTICE

nVent.com/H0FFMAN

BSBSupply 1-999-522-2706 https://www.BSBSupply.com

Spec-00131 W



INTERSAFE CONNECTOR SP3



Connector Description Connector Termination Plate Sectors Used Single receptacle with 3-amp circuit breaker Terminal block with terminal cover 2

Left-hand image shows front view. Right-hand image shows rear view.

INTERSAFE CONNECTOR SP5



| Connector Description | Connector Termination | Plate Sectors Used |
|--|------------------------------------|--------------------|
| Single receptacle with 5-amp circuit breaker | Terminal block with terminal cover | 2 |

Left-hand image shows front view. Right-hand image shows rear view.

INTERSAFE CONNECTOR TMB





| Connector Description | Connector Termination | Plate Sectors Used |
|-----------------------|-----------------------|--------------------|
| DB9F Modbus | 10-ft. cable | 1 |

Left-hand image shows front view. Right-hand image shows rear view.

INTERSAFE CONNECTOR TMM






| Connector Description | Connector Termination | Plate Sectors Used |
|-----------------------|-----------------------|--------------------|
| DB9F Micro | 10-ft, cable | 1 |





| Connector Description | Connector Termination | Plate Sectors Used |
|--------------------------|------------------------------------|--------------------|
| USB Type A, female input | 10-ft. cable, USB Type B connector | 1 |

Left-hand image shows front view. Right-hand image shows rear view.





ACCESSORIES

Spec-00131 W

SUBJECT TO CHANGE WITHOUT NOTICE

nVent.com/H0FFMAN



Notes

